

ARTICLE 3 – SITE PLANNING AND PROJECT DESIGN STANDARDS

CHAPTER 17.30 – GENERAL DEVELOPMENT STANDARDS

- 17.30.010 ~~Purpose, Intent, and~~ Applicability
- 17.30.020 Minimum ~~Size~~ Area and Width of Lots
- 17.30.030 Setback Requirements and Exceptions
- 17.30.040 Height Limits and Exceptions
- 17.30.050 Fences, Walls, and Retaining Walls
- 17.30.060 Hillside Development Standards; 30 Percent Slope Restriction ~~Ridgeline~~
~~Development and 30 Percent Slopes~~
- 17.30.070 Gates
- 17.30.080 ~~Maintenance Agreements~~ Reserved

CHAPTER 17.31 – AFFORDABLE HOUSING REQUIREMENTS AND INCENTIVES

- 17.31.010 ~~Purpose~~ Content
- 17.31.020 Definitions
- 17.31.030 Eligibility for Bonus, Incentives, and/or Concessions
- 17.31.040 Bonuses, Incentives, and Concessions Allowed
- 17.31.050 Processing of Requests
- 17.31.060 Continued Availability of Affordability
- 17.31.070 Location of Bonus Units
- 17.31.080 Time of Construction and Occupancy
- 17.31.090 Design

CHAPTER 17.32 – FLOOD DAMAGE PREVENTION

- 17.32.010 Statutory Authorization, Findings of Fact, ~~Purpose, Intent~~ Content and
Methods
- 17.32.020 Definitions
- 17.32.030 General Provisions
- 17.32.040 Administration
- 17.32.050 Provisions for Flood Hazard Reduction
- 17.32.060 Variance Procedures

CHAPTER 17.33 – LANDSCAPING STANDARDS

- 17.33.010 ~~Purpose~~ Content
- 17.33.020 Applicability
- 17.33.030 Exemption
- ~~17.33.040~~ Definitions
- ~~17.33.050~~ Landscape Plan
- ~~17.33.060~~ Landscape Standards
- ~~17.33.070~~ Irrigation Standards
- ~~17.33.080~~ Maintenance and Protection
- ~~17.33.090~~ Non-conforming Landscaping
- ~~17.33.100~~ Water Efficient Landscape Plan
- ~~17.33.110~~ Water Efficient Landscape Plan Requirements

CHAPTER 17.34 – OUTDOOR LIGHTING

10/1/201203/24/14

- 17.34.010 ~~Content~~Purpose and Intent
- 17.34.020 ~~Outdoor Lighting Standards~~Definitions
- 17.34.030 ~~Exemptions~~Lighting Plans Required
- 17.34.040 ~~Effect on Existing Outdoor Lighting~~Outdoor Lighting Limits
- 17.34.050 ~~Outdoor Lighting Standards~~
- 17.34.060 ~~Exemptions~~
- 17.34.070 ~~Effect on Existing Outdoor Lighting~~

CHAPTER 17.35 – PARKING AND LOADING

- 17.35.010 ~~Purpose and Intent~~Content
- 17.35.020 ~~Definitions~~
- 17.35.030 ~~Parking Plan Required~~
- 17.35.0430 ~~Off-street Parking and Loading Requirements~~
- 17.35.050 ~~Special Parking Requirements and Adjustments~~
- 17.35.060 ~~Material and Passenger Loading/Unloading Areas~~
- 17.35.070 ~~Recreational Vehicle Parking~~
- 17.35.080 ~~Parking Lot Design Standards~~
- 17.35.090 ~~Parking Lot Construction and Maintenance Standards~~
- 17.35.0100 ~~Non-conforming Uses~~

CHAPTER 17.36 – SIGNS -RESERVED

- 17.36.010 ~~Exception~~ Official Public Signs
- 17.36.020 ~~Exception~~ Identification Sign
- 17.36.030 ~~Exception~~ Wall Signs
- 17.36.040 ~~Face Used to Determine Area~~
- 17.36.050 ~~Location~~
- 17.36.060 ~~Resemblance to Traffic Signs Prohibited~~
- 17.36.070 ~~Lighting~~
- 17.36.080 ~~Moving Signs Prohibited~~
- 17.36.090 ~~Three dimensional Signs~~
- 17.36.100 ~~Number Permitted~~
- 17.36.110 ~~Special Use in One District Nontransferable~~
- 17.36.120 ~~Off-premises Signs~~
- 17.36.130 ~~Sign Matrix~~

CHAPTER 17.37 – NOISE STANDARDS

- 17.37.010- ~~Purpose and Intent~~Content
- 17.37.020- ~~Exemptions~~
- 17.37.030- ~~Applicability~~
- 17.37.040- ~~Definitions~~
- 17.37.050- ~~Acoustic Analysis Requirements~~
- 17.37.060- ~~Noise Standards~~
- 17.37.070- ~~Noise Reduction Measures~~
- 17.37.080- ~~Noise Level Measurements~~

CHAPTER 17.38 – OAK WOODLANDS CONSERVATION REMOVED AT THIS TIME

- 17.38.010 ~~Purpose and Intent~~

- ~~17.38.020 — Applications~~
- ~~17.38.030 — Exemptions~~
- ~~17.38.040 — Exceptions~~
- ~~17.38.050 — Oak Woodland Conservation Fee in Lieu of Mitigation~~
- ~~17.38.060 — On_ site Mitigation~~
- ~~17.38.070 — Off_ site Mitigation or Fee Payment in Lieu of On_ site Conservation and Replacement of Oak Canopy~~
- ~~17.38.080 — Oak Woodlands Conservation Fee; Formula~~
- ~~17.38.090 — Annual Fee Review~~
- ~~17.38.100 — Time of Fee Payment~~
- ~~17.38.110 — Accounting~~
- ~~17.38.120 — Handling~~
- ~~17.38.130 — Appeals~~
- ~~17.38.140 — Definitions~~

10/1/201203/24/14

CHAPTER 17.30 – GENERAL DEVELOPMENT STANDARDS**Sections:**

- 17.30.010 ~~Purpose, Intent, and Applicability~~
- 17.30.020 Minimum Size and Width of Lots
- 17.30.030 Setback Requirements and Exceptions
- 17.30.040 Height Limits and Exceptions
- 17.30.050 Fences, Walls, and Retaining Walls
- 17.30.060 Hillside development standards; 30 percent slope restriction~~Ridgeline Development and 30 Percent Slopes~~
- 17.30.070 Gates—
- 17.30.080 ~~Maintenance Agreements~~Reserved

17.30.010 ~~Purpose, Intent, and Applicability~~

~~The purpose of t~~This Chapter is to identify ~~identifies~~ development standards that apply to all zones in order to provide ~~uniform development throughout the County and consistent application~~interpretation of development standards throughout the county. Standards pertaining to the creation of new lots, new projects or the modification of existing parcels-lots are found in the Land Development Manual (LDM) or Design Manual (DM) as applicable. ~~In addition, the LDM contains standards applicable to hillside development conditions. for public benefit. The intent of this Chapter is to encourage aesthetically pleasing development, and to create a stable, safe, and healthy environment for the residents and commercial interests of the County.~~

17.30.020 ~~Minimum Size~~Area and Width of Lots

A. The minimum area and width of lots shall be as defined in the Development Standards for each zone as set forth in Chapters 17.21 –through 17.26, inclusive, and Title 16 - Subdivisions.

~~A. **Compliance with Zone Standards Required.** All lots created by parcel map, subdivision map, or lot line adjustment shall conform to the minimum lot size and width for the zone in which the lot is located, except as provided in Subsections D and E, and where approved under a Development Plan Permit or lot line adjustment in compliance with Sections 17.52.040 and 16.53.070, 0720, respectively.~~


~~B. Measurement of Minimum Lot Size. For compliance with minimum lot size, measurements shall be calculated as follows:~~

- ~~1. For Lots Less Than Two Acres in Size. Net acreage of the lot, as defined in Article 8.~~
- ~~2. For Lots Two Acres or Larger in Size. Gross acreage of the lot.~~
- ~~3. For All Flag-shaped Lots. Net acreage of the lot minus the area of the access strip.~~

~~CB. Measurement of Lot Width. Except as provided under Subsection A above: Lot width shall be measured in accordance with the following:~~

- ~~1. Minimum frontage must be equal to or greater than the minimum lot width required for the zone. The lot frontage width shall be measured at the front lot line or the edge of the right-of-way or road easement. Where a lot is located at the end of a cul-de-sac or on the outside curve of a road, the lot frontage width shall be measured at the minimum front setback line as established by the development standards of the zone.~~
- ~~2. Average width of the lot as measured, at a minimum, across the frontage, approximate midsection, and rear boundary of the lot, must be equal to or greater than the minimum lot width required for the zone.~~
- ~~32. For a flag lot, the measurement requirements under Paragraph 21 above shall be taken across that portion of the lot not containing the access strip, as shown in Figure 17.30.020.A below. In addition, the flag lot must meet the following standards for it to be in compliance with minimum width requirements of the applicable zone:~~
 - ~~a. The access strip does not exceed 100 feet in length; and~~
 - ~~b. The access strip has a minimum width of 25 feet.~~

Figure 17.30.020.A Example: Flag Lot Measurements

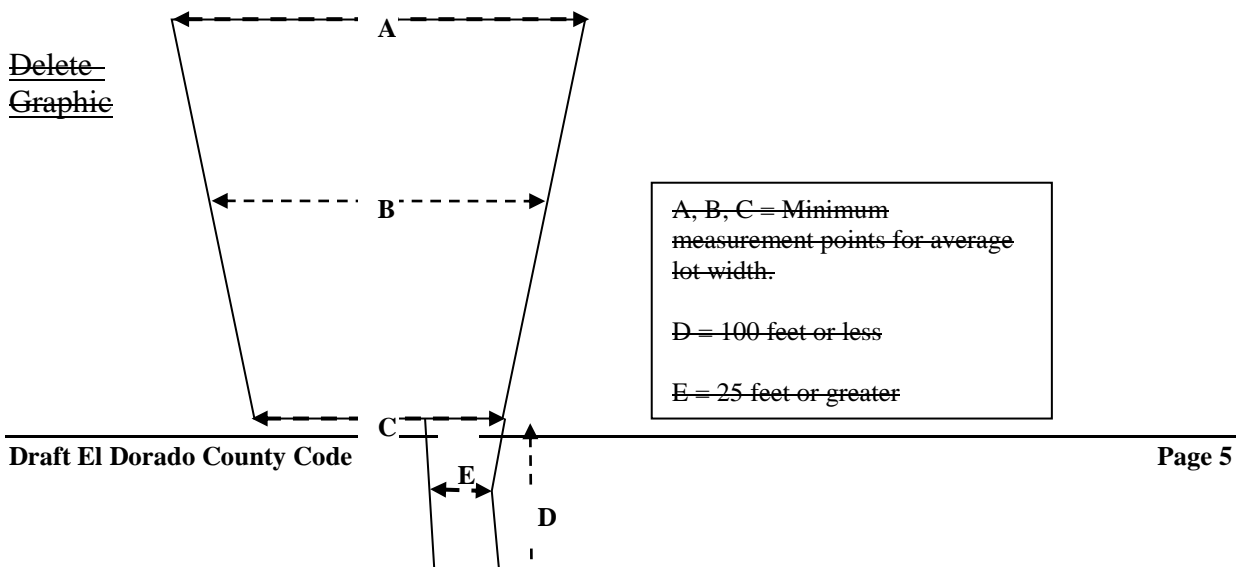

~~D. **Lot Size Exceptions.** The following exceptions to the minimum lot size requirements shall apply to lots created in conformance with Title 16, including those as a result of a lot line adjustment, providing the exception would not conflict with General Plan policies or provisions within this Title that require buffers to adjacent lots:~~

~~1. In the RE, RL, PA, AG, and FR zones, and in the AE and AP zones where the property is not under a Williamson Act Contract, an existing lot may be subdivided in such a way that one new lot of less size than is required in the applicable zone is created within each subdivision, if one of the following exists:~~

~~a. Either the lot is shown on the County tax roll or the recorded deed as a separate lot, is described as a fractional division of a section, and a subsequent survey of the lot shows it to be no more than ten percent less than the acreage indicated on that tax roll;~~

~~b. The lot is shown on the 1979 County tax roll as a separate lot and the tax roll shows it to be no more than ten percent less than the acreage required to make even divisions into the minimum lot size to which it is zoned; or~~

~~c. The lot is shown on the 1979 County tax roll as a separate lot and a survey shows it to be no more than ten percent less than the acreage required to make even divisions into the minimum lot size to which it is zoned, and both of the following exist:~~

~~(1) The smallest lot proposed to be created is no less than 75 percent of the minimum size required by the applicable zone but, in no case shall a lot be created less than 4.5 acres when groundwater dependant; and~~

~~(2) All other lots proposed to be created conform to the minimum required by the applicable zone or do not exceed the minimum by more than one-tenth of an acre.~~

~~2. **Lots Conveyed to Government Agency, Public Entity or Public Utility.** The minimum lot size set forth in each of the zones shall not apply to lots created for the sole purpose of conveyance, dedication or transfer to a government agency, public entity, or public utility for such uses by the agency, entity, or utility as may be authorized by law, subject to the following provisions:~~

- a. ~~The remainder of the lot from which the lot conveyed to the government agency originated shall comply with the minimum lot size for the zone;~~
- b. ~~The County may require a notice of restriction be recorded against the lot stating that at such time as the government agency, public entity or utility determines that it no longer intends to use the lot for the purpose for which it was obtained, it shall revert back and be merged with the parent lot if the lot is substandard due to size.~~
- c. ~~A certificate of compliance, in compliance with Section 16.76.090.E of the County Code, shall be required if a lot created in compliance with this paragraph is subsequently conveyed to a person or entity other than a governmental agency, public entity or utility.~~

E. ~~Lot Size Averaging.~~ ~~Where a lot or lots are proposed to be subdivided, the minimum lot size may be reduced by not more than ten percent for one or more lots in order to take advantage of topographic, geographic, or other features of the land by averaging the lot sizes in the subdivision. Except as provided in Subsection D above, the average lot size shall not be less than the minimum lot size required by the applicable zone.~~

17.30.030 Setback Requirements and Exceptions

All structures and buildings (Article 8: see “Structure”) shall be located on a lot so as to conform to the setback requirements established for the zone in which the lot is located, as set forth in Chapters 17.21 through 17.26 inclusive, except as provided in this Chapter unless and until a Variance is granted in compliance with Section 17.52.0870 or standards are modified pursuant to a Development Plan permit in compliance with 17.52.040 (Development Plan Permit).

A. Measurement of Setbacks. Setbacks shall be measured from the closest of either a property line, the edge of a road easement, or the edge of a right-of-way line to the nearest point of the foundation or support of a building or structure, on a line perpendicular to the property line, road easement, or right-of-way line.

1. Setbacks adjacent to existing private roads without defined right-of-way or road easements shall be established through prescriptive right or undefined road easements shall be assumed to have the following right of way for the purpose of establishing the minimum front setback from the existing centerline of the roadway measured from the edge of the maintained area of the road. Setbacks adjacent to county maintained roadways shall be measured atfrom a distance of 30 feet from the centerline of the road.

a. ~~Non-county Maintained Roadways. Minimum 50 foot right of way.~~

b. ~~County Maintained Roadways. Minimum 60 foot right of way.~~

10/1/201203/24/14

2. Where the Board has adopted a future roadway alignment, the minimum setback shall be measured from the edge of the future right-of-way line.

3. ~~Roads listed in Expanded setbacks from major roads identified in the Land Development Manual Table 17.30.030.1 below shall be applied to protect future right of way for the planned widening of those roads. Proposed development adjacent to these roads shall be increased by the distance shown in the table the Land Development Manual. on each side of the centerline of the proposed roadway alignment. have specific right of way widths to be used in establishing the minimum front setback from the existing centerline of the road.~~
(Adopted 2004 General Plan)

Table 17.30.030.1 — Selected Right-of-Ways (ROW) Expanded Setback Requirements


| ROAD | SEGMENT | FUTURE ROW WIDTH (in feet) EXPANDED SETBACK |
|---------------------------------------|---|---|
| Bass Lake Road | US 50 to Silver Springs Pkwy | 80 ??? |
| Cameron Park Drive | 1. Durock Rod to Coach Ln | 80 40 |
| | 2. Coach Ln to Oxford Rd | 100 50 |
| El Dorado Hills Blvd | 1. US 50 to Lassen Ln | 120 60 |
| | 2. Lassen Ln to Francisco Dr | 100 |
| Francisco Drive | EDH Blvd to Green Valley Rd | 100 |
| Green Valley Road | County Line to Deer Valley Rd (W) | 100 |
| Latrobe Road | 1. Investment Blvd to Golden Foothill Pkwy (south end Entrance 3) | 100 |
| | 2. Golden Foothill Pkwy (south end Entrance 3) to US 50 | 120 |
| Missouri Flat Road | 1. Headington Rd to China Garden Rd | 100 |
| | 2. China Garden Rd to SR 49 | 80 |
| Mother Mother Lode Drive | S. Shingle Rd to French Creek Rd | 80 |
| Pleasant Valley Road/SR 49 | El Dorado Rd to Big Cut Rd | 80 |
| Saratoga Way | County Line to EDH Blvd | 100 |
| Silva Valley Parkway | US 50 to Green Valley Rd | 100 |
| Sophia Parkway | County Line to Green Valley Rd | 100 |
| White Rock Road | 1. County Line to Latrobe Rd | 100 |
| | 2. Latrobe Rd to Silva Valley Pkwy | 120 |

4. Corner Lots. A corner lot with frontage on two or more streets shall have a front yard (see Article 8. See “Yards”) setback requirements, as identified in

the Development Standards Tables in Article 2, along each property line adjoining adjacent to a street, subject to the following exceptions:

- a. **Double Frontage Corner Lots.** On a corner lot with frontage on two streets, the building permit application shall specify the primary front yard; the remaining street frontage shall be considered the secondary front yard, as shown in Figure 17.30.30.A below. The yard opposite the primary front yard shall be considered the rear yard. The frontage containing the driveway access shall be the primary front yard (Article 8: See “Yards”) while the remaining frontage shall be considered the secondary front yard, as shown in Figure 17.30.030.A below. The primary front yard setback shall comply with the front yard setbacks of the zone; the secondary front yard setback shall comply with the secondary front setback applicable to the zone.


Figure 17.30.030.A Example: Corner Lot Setbacks

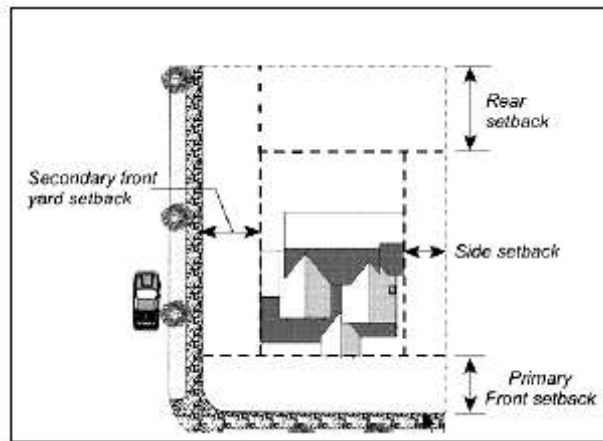

- b. **Triple Frontage Corner Lots.** On a corner lot with frontage on three streets, the building permit application shall specify the primary front yard. The frontage opposite the primary front yard containing the driveway encroachment shall be considered a rear yard for setback purposes, providing vehicular access is restricted.
- c. **Side and Rear Yards.** The remaining non frontage lot lines of a corner lot shall be considered side yards where they abut side yards of the adjoining lot(s), and a rear yard where they abut a rear yard of the adjoining lot(s). If the corner lot abuts two rear yards or two side yards, the shorter lot line of the two shall be considered the rear yard and the longer shall be considered the side yard for setback purposes, as shown in Figure 17.30.030.A.
- d. **Rear Setback on Triangular Lot.** Where a triangular lot has no rear lot line because its side lot lines converge to a point, an assumed line placed at the point, or vertex, of the angle and running perpendicular to a

line bisecting the angle shall be considered the rear lot line for the purpose of measuring the required rear setback, as shown in Figure 17.30.030.B below:

Figure 17.30.030.B Example: Rear Setbacks, Triangular Lots

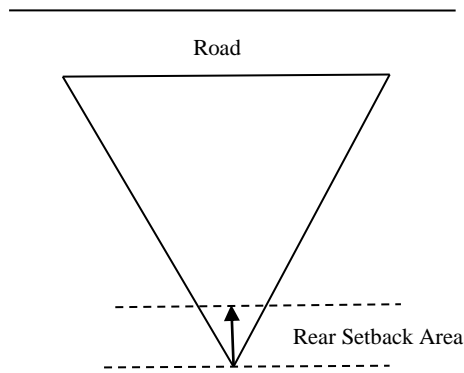

5. Through Lots. Through lots, or double frontage non-corner lots, shall maintain front yard setbacks for the primary frontage containing the driveway encroachment, and rear yard setbacks for the opposite frontage, providing vehicular access is restricted. Where vehicular access is allowed, front yard setbacks shall apply.

~~6. Agricultural Structures. For purposes of determining development standards as to setbacks, the use of any portion of a structure for any of the agricultural purposes defined in Article 8 (“Structure: Agriculture”) causes the entire structure to be treated as an agricultural structure.~~

B. Exceptions to Setback Requirements. The following exceptions to the setback requirements shall be ~~permitted~~ allowed when the qualifying conditions have been documented by a licensed civil engineer or surveyor. All reductions in front yard setbacks shall be subject to cross visibility area (CVA) requirements under Subsection 17.30.0650.B.4.

1. Front Setback Reduction for Slope. Where the elevation of a lot measured at the required front setback line averages six feet or more for a lot less than one acre, or eight feet or more for a lot one acre or greater, above or below the elevation at the edge of road pavement ~~adjoining~~ adjacent to said lot, the required front setback for a single-story structure may be reduced by 50 percent, except:

- a.- Where a lot has more than one frontage, the elevation criteria set forth under this Paragraph must be satisfied for all frontages.
- b. Any parking structure ~~permitted~~ allowed by this Paragraph at a reduced front setback shall provide at least 20 feet of parking area between the edge of road pavement and the structure.

2. **Administrative Relief.** Setback reductions for a multi-story structure, or where all frontages of a lot do not meet the elevation criteria set forth in Paragraph 1 above, may be approved under administrative relief subject to Chapter 17.652, provided the requirement under Subparagraph 1.b is met.

C. Projections into Required Setbacks.

1. Cornices, window canopies, eaves, bay windows, or similar architectural features, which do not qualify as habitable area under the building code; ~~attached~~ heating and air conditioning equipment; and uncovered and unenclosed decks of 30 inches in height or less, excluding handrails, may extend into any required setback by not more than 50 percent provided that no such feature shall be ~~permitted~~ allowed within three feet of any side lot line.
 - a. For uncovered and unenclosed decks, setbacks shall be measured from the closest portion of the deck, such as flooring, footing, or foundation, to the property line.
 - b. ~~When located within a required setback as allowed by this Subsection, accessory mechanical equipment that generates noise (such as air conditioning or swimming pool equipment) shall be enclosed with an appropriate noise barrier when less than 10 feet from the property line or otherwise necessary as necessary to reduce noise levels at the property line consistent with noise standards under Chapter 17.379.~~
2. Front yards may have the following additional encroachments:
 - a. Fences and walls, subject to 17.30.050;
 - b. Bear resistant garbage can containers, subject to Paragraph 3.gf, below.
 - c. Signs, subject to Chapter 17.376.
3. The following encroachments or reduced setbacks into the required yards are ~~permitted~~ allowed for the following specific uses, provided there is no encroachment into any public utility or drainage easement:
 - a. Swimming pool, heating and air conditioning equipment may encroach into any setback by up to 50% but not less than 3 feet from any lot line. When located within a required setback as allowed by this Subsection, accessory mechanical equipment that generates noise (such as air conditioning or swimming pool equipment) shall be enclosed with an appropriate noise barrier when less than 10 feet from the property line.
 - b. Swimming pools measured to the back edge (non-water side) of the bond beam and their accessory water features, such as manmade waterfalls, if 30 inches in height or less:

10/1/201203/24/14

- (1) Front. Setback required by zone;
- (2) Side and Rear. 5 feet minimum;
- ~~(3) Pool Equipment. All setbacks required by zone.~~

bc. **Propane Tanks** shall meet the applicable standards of the fire codes ~~or~~ subject to the following conditions; whichever is greater:

- (1) Front;
 - (a) The propane tank may be located within the front setback provided it is not less than 10 feet from the property line and the Setback required by zone; or
 - ~~(b) 10 feet, if tank is less than 40 inches in height and fully screened by fencing or landscaping subject to Section 17.30.050 and 17.17.500.E.3, respectively.~~
- ~~(2) Side and Rear. 10 feet;~~
- ~~(3) Underground Tanks; May be located within any setback requirements.~~

ed. **Portable Sheds** (non-habitable, less than 120 square feet of **floor space**~~projected roof area~~, containing no utilities):

- (1) Front. Setback required by zone;
- (2) Side and Rear. 5 feet minimum, subject to fire-safe regulations under Subsection D, below.

de. **Chimneys** (at ground level):

- (1) Front and Rear. 3 feet into setbacks;
- (2) Side. 3 feet into setback, but in no instance shall the remainder of the side yard be less than 3 feet;
- (3) Chimneys that protrude above ground level, such as cantilevered chimney chases on the second story of a residence, shall not be subject to setback requirements.

~~e. Retaining Walls greater than 36 inches in height:~~

- ~~(1) Front. Setback may be reduced by 50 percent where the slope gradient for the front half of the lot exceeds 25 percent, providing:

 - ~~(a) Exposed height shall not exceed seven feet;~~
 - ~~(b) Any fence erected within five feet of the top of a retaining wall shall meet the requirements under Subsection 17.30.050.B, for height, construction, and cross visibility area (CVA) purposes.~~~~
- ~~(2) Retaining walls that exceed the standards in Paragraph (1.a) above shall be subject to a Minor Use Permit (Section 17.52.020);~~
- ~~(3) Retaining walls necessary to provide site access, or that do not exceed 36 inches in exposed height, shall not be subject to setback requirements. In addition, such walls may be permitted~~

~~within public utility easements, but shall not be permitted within drainage easements.~~

- f. **Solar Collectors** that are ground mounted shall comply with the required side and rear setbacks for the zone, subject to the height requirements and maximum reduction in setbacks allowed under state Public Resource Code Section 25981.
- g. **Bear Resistant Garbage Can Containers.** A bear resistant garbage can enclosure in compliance with the approved list maintained by the Environmental Management Department shall be subject to the following minimum setbacks:
- (1) Ten feet from the road as measured from the edge of the curb-face or pavement if no curbing exists. In no event shall a container be placed within the road right-of-way or easement;
 - (2) On corner lots, containers shall not be located within the CVA at the intersection, as shown in Figure 17.30.050.B (Example #2); ~~except in this instance the CVA shall be determined by measuring 25 feet along the lot lines extending from the lot corner instead of 35 feet.~~
- h. **Trellises and Arbors.**
- (1) A trellis shall be considered similar to a fence for setback purposes and be subject to the requirements for fences under Section 17.30.050 ~~and Subparagraph 3.e.(2), above;~~
 - (2) An arbor less than 50 percent open shall be considered a structure and be subject to development standards, including setback requirements, for the zone.

D. Fire Safe Setbacks. ~~Where the net acreage of a lot~~ Where the net acreage of a lot ~~is one acre or larger,~~ is one acre or larger, ~~in size any new structure shall have~~ in size any new structure shall have ~~maintain a 30 foot setbacks from all property lines or from the edge of the road, on all sides unless the applicable fire protection agency or the county has approved an exception, given written approval,~~ maintain a 30 foot setbacks from all property lines or from the edge of the road, on all sides unless the applicable fire protection agency or the county has approved an exception, given written approval, conditional or otherwise, for a reduction of the side and/or rear setback requirement ~~from 30 feet to either the standard setback for the zone or as allowed under a Development Plan Permit.~~ from 30 feet to either the standard setback for the zone or as allowed under a Development Plan Permit.

E. Special Setbacks for Agricultural and Timber Resource Protection. Notwithstanding any other provision of this Title, where incompatible uses, as defined in Article 8 (Incompatible Uses: Agricultural), ~~adjoin~~ adjacent to the agricultural zones of LA, PA, and AG, or the **Forest Resource (FR) and** Timber Production Zone (TPZ), the following setbacks shall apply on those lots containing the incompatible use:

~~1. Setback Standards on Lots Adjoining~~ 1. Setback Standards on Lots Adjacent to Agricultural Zones:

- ~~a. Adjoining~~ a. Adjacent ~~When the agriculturally zoned lot is located within a General Plan designated Agricultural District: 200 feet~~ When the agriculturally zoned lot is located within a General Plan designated Agricultural District: 200 feet

~~_____~~ b. ~~Adjoining~~ When the agriculturally zoned lot is located outside of a General Plan designated Agricultural District, ~~where~~ and:

~~_____~~ (1) A ~~L~~lot with the proposed incompatible use is 10 acres or larger: 200 feet;

~~_____~~ (2) A ~~L~~lot with the proposed incompatible use is less than 10 acres: No special agricultural setback is required.

c. When the lot adjacent to the agriculturally zoned lot is in a General Plan designated Community Region or Rural Center: 50 feet.


2. Setback Standards on Lots ~~Adjoining~~ Adjacent to the Forest Resource or Timber Production Zone, when:

a. When the lot adjacent to the ~~Adjoining~~ Forest Resource or Timber Production Zone is within the General Plan designated Rural Region: 200 feet.

b. ~~Adjoining~~ When the lot adjacent to the Forest Resource or Timber Production zone is within a General Plan designated Community Region or Rural Center: 50 feet.

3. Setbacks and Buffers for ~~Adjoining~~ Adjacent Tangent Lots. Where an agricultural or timber production zoned lot abuts an ~~adjoining~~ lot at a tangent or single point and where an agricultural or timber production zone setback will apply to the adjacent adjoining lot, the setback will be measured as a radius the length of the required setback, from the point of tangent into the ~~adjoining~~ adjacent lot, as shown in Figure 17.30.030.C below:

Figure 17.30.030.C Examples: Tangential Setbacks

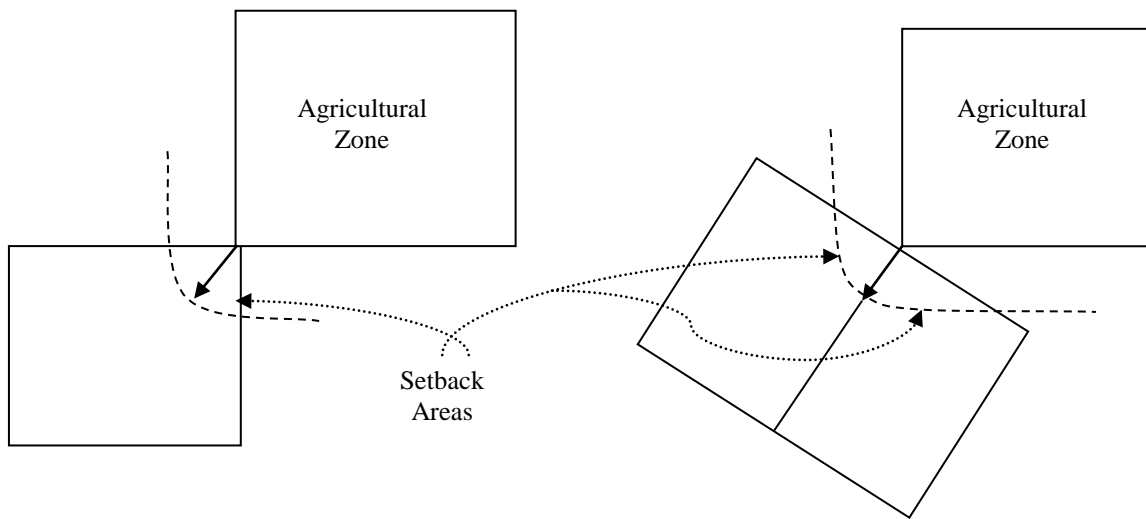

4. **Administrative Relief.** Administrative relief from the setback requirements established in Paragraphs 1 – 3 above may be granted by the County Agricultural Commission or the Director under an Administrative Permit (Section 17.52.010) in compliance with criteria set forth by resolution of the Board, as amended from time to time.

~~F. **Cemeteries.** Setbacks of 30 feet shall be maintained from all property lines adjoining an existing cemetery; or from the delineated boundaries of a cemetery when it lies within an adjoining lot but does not abut the property line.~~

~~1. ~~Where cemetery boundaries are not delineated, or where cemetery boundaries are delineated but graves are suspected of lying outside of said boundaries, an investigative survey shall be performed at the direction of the County's Cemetery Director for the purpose of establishing setback lines. Investigative survey methods shall be subject to the discretion of said Director. Cemetery~~~~

10/1/201203/24/14

~~boundaries established under this method shall be recorded prior to permit issuance.~~

- ~~2. Administrative relief of up to 50 percent of the required setback can be granted by the Development Services Director, subject to the review and approval of the Cemetery Director, under an Administrative Permit (Section 17.52.010).~~

GF. Special Setbacks for Mineral Resource Protection.

1. Notwithstanding any other provision of this Title, where incompatible uses, as defined in Article 8 (Incompatible Uses: Mining), ~~adjoin~~adjacent to lands located in the _____MR Combining Zone, the following setbacks shall apply on those lots containing the incompatible use:

- a. 250 feet on lots 10 acres or greater.
- b. 150 feet on lots less than 10 acres in size.——

- 2. The required setbacks in Paragraph G.1. may be administratively reduced under an Administrative Permit (Section 17.52.010) by not more than 50 percent when the property owner affected by the setback has demonstrated to the Director that the mineral resource is at least 250 feet from the property line and mining activities are not likely to be carried on within 250 feet of the property line.

HG.- Protection of Wetlands and Sensitive Riparian Habitat~~Riparian Setbacks.~~

1. ~~1.~~ **Purpose.** The purpose of this Subsection is to:
- a. ~~Protect natural and man-made wetlands, vernal pools, wet meadows, and riparian areas from impacts related to development, for their importance to wildlife habitat, water purification, erosion control, scenic values, and unique and sensitive plant life, and to allow for natural changes that may occur within the riparian corridor.~~
 - b. ~~Protect riparian resources to enhance tourism.~~
 - c. ~~Implement General Plan Policies 7.3.3.4 and 7.4.2.5 by developing buffers and special setbacks for the protection of riparian areas, lakes, and wetlands, while providing a process for the County to consider and authorize exceptions in order to allow reasonable use of property.~~
 - d. ~~Provide standards to assist the review authority and Department in their evaluation of reasonable use of property containing natural and man-made wetlands, vernal pools, wet meadows, lakes and riparian areas.~~

12. — Applicability. ~~Setbacks from perennial and intermittent lakes, rivers and streams are established to buffer waters, wetlands and riparian areas as provided in General Plan Policies 7.3.3.4 and 7.4.2.5.~~

a. ~~Ministerial and discretionary development shall comply with the provisions of this Subsection subject to the exemptions under Paragraph 3 and the exceptions under Paragraph 4 below.~~

b. ~~Setbacks shall be required from all riparian features that are shown on the latest 7.5 minute, 1:24,000 scale United States Geological Survey (USGS) Quadrangle maps. Riparian features include all ditches, wetlands, streams (perennial and intermittent), ponds, and lakes shown on the maps.~~

c. ~~Setbacks from wetland areas identified in a wetland delineation report conducted using the U.S. Army Corps of Engineers (USACE) Wetland Delineation Manual shall also be applied to discretionary development.~~

d. ~~Setbacks are not required from wetlands filled under authorization of the County and the USACE.~~

3. — Exemptions. ~~Ministerial and discretionary development shall be exempt from the provisions of this Subsection when:~~

a. ~~The project is within the joint jurisdiction of the County and the Tahoe Regional Planning Agency (TRPA), in which case, the TRPA setbacks will apply.~~

b. ~~Wetlands are allowed to be filled under authorization of the County and the USACE.~~

4. — Exceptions to Setbacks. ~~The following encroachments into riparian setbacks shall be permitted:~~

a. ~~Replacement, repair, alteration, or maintenance of structures that lawfully exist within a riparian setback, in compliance with Section 17.61.030 (Nonconforming Uses, Structures, and Lots).~~


b. ~~Grading necessary for the construction of access to a building site where no reasonable access outside of the setback area exists.~~

c. ~~Boat ramps, docks, piers, and related features used for private purposes, subject to applicable local, state, or Federal regulations.~~

5. — Measurement of Riparian Setbacks. ~~Riparian setbacks shall be measured from the edge of riparian vegetation or “top of bank”, as defined in Article 8, whichever is furthest from the water feature. For lakes and ponds, the top of bank is equivalent to the ordinary high water mark (OHWM), as defined in Article 8, or spillway elevation. The determination of the edge of riparian vegetation shall be based~~

on the predominant pattern of riparian vegetation, as shown in Figure 17.30.030.D below. Where the edge of the vegetation varies greatly, an “average” line may be used that follows the topography, subject to Director approval.

Figure 17.30.030.D Example: Riparian Setback Measurements ~~Delete graphic~~

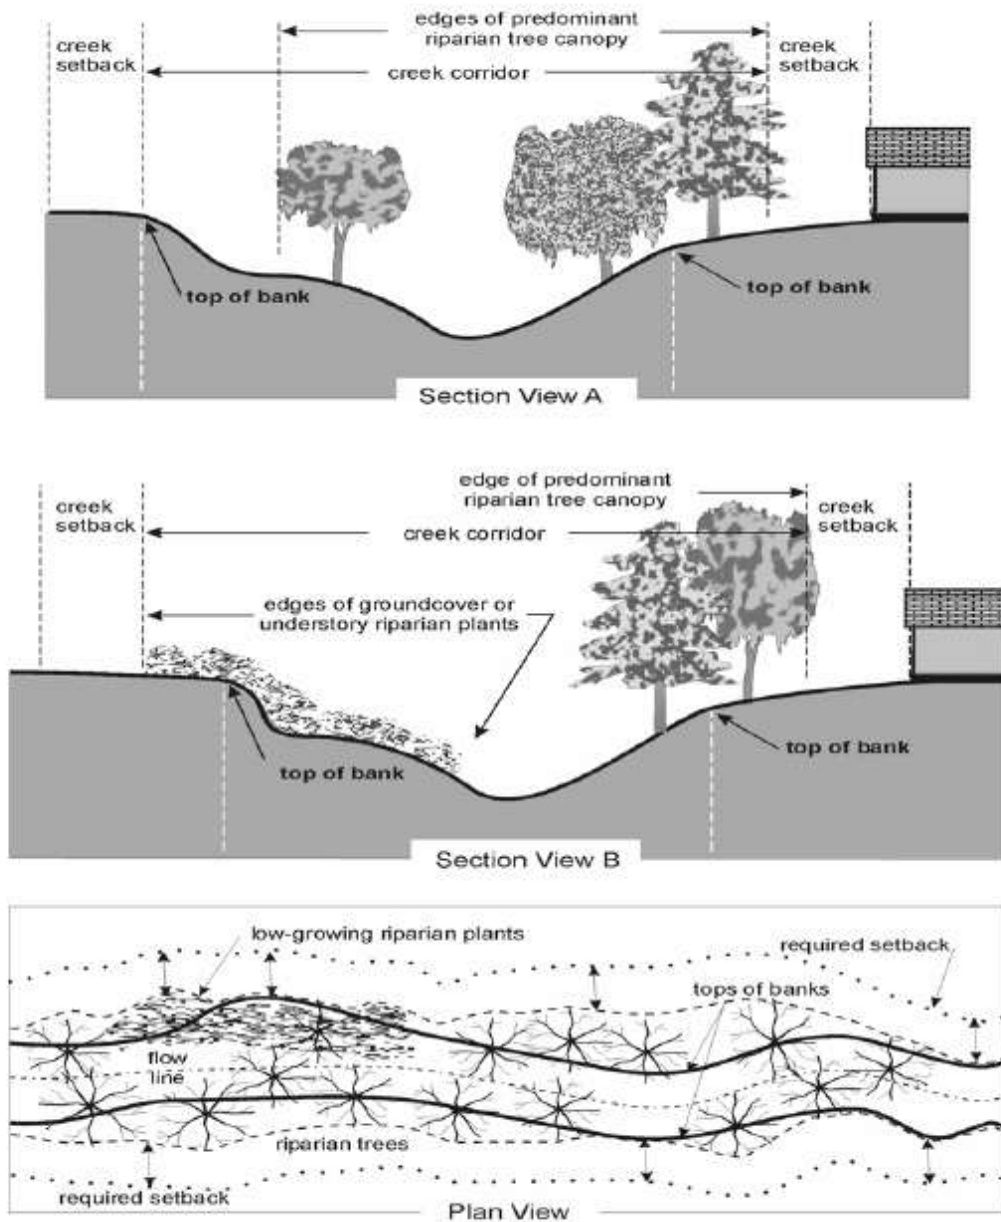

Optional Review – Measurement of Riparian Setbacks. Riparian setbacks shall be measured from the “top of bank”. For lakes and ponds, the top of bank is equivalent to

the ordinary high water mark (OHWM), as defined in Article 8, or maximum spillway elevation, if controlled by a dam.

~~6. — **Site Plan Requirements.** The location of top of bank, OHWM, spillway, and/or riparian vegetation the required setback shall be shown on all project site plans and grading plans that require County approval. The location is subject to confirmation by the Director, based on observation of actual conditions and, as needed, the conclusions of qualified professionals with expertise in hydrology, biology, or geology.~~

~~— **Optional Review Site Plan Requirements.** The location of the riparian setback, as determined in Paragraph 5, shall be shown on all project site plans and grading plans that require County approval. The location is subject to confirmation by the Director, based on observation of actual conditions and, as needed, the conclusions of qualified professionals with expertise in hydrology, biology, or geology.~~

~~7. — **Setback Requirements.** The following minimum setbacks shall be applied except where required in Subparagraph c, below:~~

~~a. — **Riparian and Wetland Setbacks.** Setbacks shall be 30 feet for all lots equal to or less than one acre in size and 50 feet for all lots over one acre in size.~~

~~b. — **Ministerial Setback Relief.** Riparian and wetland setbacks required under Paragraph a, above, may be reduced subject to a biological study being performed by a qualified professional in compliance with the requirements in Subsection 9.a, below. Any recommended reduction in setbacks shall not be reduced to less than 15 feet for all lots equal to or less than one acre in size and 30 feet for all lots over one acre in size.~~

~~c. — **Specific Riparian Setbacks.** The following setbacks shall be provided, unless a discretionary approval by the County provides a larger or smaller setback:~~

~~(1) — The setback from the following lakes and reservoirs shall be 200 feet:~~

- ~~Bass Lake~~
- ~~Folsom Lake~~
- ~~Jenkinson Lake (Sly Park)~~
- ~~Slab Creek Reservoir~~
- ~~Stumpy Meadows Reservoir~~

~~(2) — The setback along the following rivers shall be 100 feet:~~

- ~~American River — Middle and South Forks~~
- ~~Cosumnes River — North, Middle, and South Forks~~
- ~~Rubicon River~~

~~(3) — The setback along the following streams shall be 50 feet:~~

- ~~Big Canyon Creek~~
- ~~Deer Creek (south of U.S. Highway 50 only)~~
- ~~Camp Creek~~
- ~~Clear Creek~~
- ~~Martinez Creek~~
- ~~Pilot Creek~~

~~Weber Creek (including North Fork and South Fork tributaries)~~

~~(4) — The setback from all water ditches shown on the USGS maps shall be either ten feet when not identified in an easement, or at edge of easement where applicable.~~

~~**8. — Items Prohibited Within Setbacks.** The following shall be prohibited within a riparian setback, except as provided in Paragraph 4:~~

~~a. — Structures.~~

~~b. — Paving or other impervious surfaces.~~

~~e. — Areas used for storing or working on vehicles, equipment, or materials.~~

~~d. — Grading.~~

~~1. Content. This subsection establishes standards for avoidance and minimization of impacts to wetlands and sensitive riparian habitat as provided in General Plan Policies 7.3.3.4 and 7.4.2.5.~~

~~2. Applicability. The standards in this subsection apply to all ministerial or discretionary development proposed adjacent to any perennial streams, rivers or lakes, any intermittent streams and wetlands, as shown on the latest 7.5 minute, 1:24,000 scale United States Geological Survey (USGS) Quadrangle maps, and any sensitive riparian habitat within the county. Activities regulated under this subsection include those activities also regulated under the federal Clean Water Act (33 U.S.C. §1251 et seq.) and California Fish and Game Code (Section 1600-1607). These standards do not apply to culverted creeks and engineered systems developed or approved by the County or other public agency for collection of storm or flood waters, or systems other than natural creeks designed to deliver irrigation or water supplies. Additional standards applicable to the design of new developments or subdivisions are found in the County's Land Development and Design Manual.~~

~~—3. Use Regulations.~~

~~a. New ministerial and discretionary development shall avoid or minimize impacts to perennial streams, rivers or lakes, intermittent streams and wetlands, and any sensitive riparian habitat to the maximum extent practicable. Where avoidance and minimization are not feasible, the county shall make findings, based on documentation provided by the project proponent, that avoidance and minimization are infeasible.~~

~~b. Any new development which does not avoid impacts to wetlands and sensitive riparian habitat shall prepare and submit a Biological Resource Evaluation identifying the location of all features regulated under this section.~~

- c. An applicant shall obtain all required permits from state or federal agencies having jurisdiction, and shall fully implement any mitigation program required as a condition of such permit. Where the area impacted is not within federal or state jurisdiction, the county shall require appropriate mitigation as recommended in a biological resource evaluation.
- d. Ministerial development, including single family dwellings and accessory structures, shall be set back a distance of 25 feet from any intermittent stream, wetland or sensitive riparian habitat, or a distance of 50 feet from any perennial lake, river or stream. This standardized setback may be reduced, or grading within the setback may be allowed, if a biological resource evaluation is prepared which indicates that a reduced setback would be sufficient to protect the resources.
- e. All discretionary development which has the potential to impact wetlands or sensitive riparian habitat shall require a biological resource evaluation to establish the area of avoidance and any buffers or setbacks required to reduce the impacts to a less than significant level. Where all impacts are not reasonably avoided, the biological resource evaluation shall identify mitigation measures that may be employed to reduce the significant effects. These mitigation measures may include the requirement for compliance with the mitigation requirements of a state or federal permit, if required for the proposed development activity.
- f. Any setback or buffer required by this subsection shall be measured from the ordinary high water mark of a river, perennial or intermittent stream, and the ordinary high water mark or spillway elevation of a lake or reservoir.
- g. Except where otherwise provided in this section, filling, grading, excavating or obstructing streambeds is prohibited except where necessary for placement of storm drain and irrigation outflow structures approved by the county; placement of public and private utility lines; construction of bridges and connecting roadways; maintenance activities necessary to protect public health and safety; and creek restoration and improvement projects.
- h. All new septic system construction shall comply with standards established by the County Environmental Management Department, or applicable state and federal regulations for setbacks from lakes, rivers and streams.
- i. Projects within the joint jurisdiction of the County and the Tahoe Regional Planning Agency (TRPA) shall be subject to setbacks established by TRPA.

4. -Exceptions; Uses allowed. The following uses are allowed:

- a. Native landscaping;
- b. Fencing, consistent with the provisions of 17.30.050.B, that does not interfere with the flow of waters or identified wildlife migration corridors;
- c. Roads or driveways used primarily for access or for the maintenance of a property;
- d. Utilities;
- e. Storm drains into riparian areas and creeks;
- f. Trails and passive recreational activities not involving the establishment of any structures;
- g. Boat ramps, docks, piers, and related features used for private purposes, subject to applicable local, state, or Federal regulations.
- h. Construction and maintenance of bridges, culverts, rip-rap, and other drainage facilities.
- i. Agricultural activities that utilize best management practices (BMPs), as recommended by the County Agricultural Commission and adopted by the Board.

5. Exceptions; Conditionally Permitted Uses.

- a. The uses, structures and activities allowed in the applicable zone are ~~permitted~~ allowed within riparian areas with an approved Minor Use Permit.
- b. In addition to the findings required for approval of a Minor Use Permit, the Zoning Administrator shall make all of the following findings for a Minor Use Permit for riparian area development:
 - (1) The proposed use, structure, or encroachment cannot be feasibly located outside the riparian area or such location would have a more adverse effect on the stream environment.
 - (2) Measures are included that provide adequate protection of wildlife habitat, water quality and in-stream habitat, and capacity for flood management.

6. Performance Standards.

- a. Construction is prohibited in riparian buffers unless the necessary permits have been obtained from other responsible governmental agencies, and plans have been approved by the County.
- b. Grading, alteration of the natural contours of the land, or cutting or alteration of natural vegetation that protects sensitive riparian habitat is prohibited within riparian areas except when such action is required for the construction of an approved development or structure, associated with an agricultural use utilizing approved BMP's, or a creek restoration and enhancement project, or necessary to protect public health and safety.

7. Specific setbacks for major lakes, rivers and streams. The setbacks identified in Table 17.30.030.H.1 shall be provided, unless a discretionary approval by the county provides a larger or smaller setback.

-Table 17.30.030.H.1

| <u>Specific Riparian Setbacks</u> | |
|---|-----------------|
| <u>Lakes and Reservoirs</u> | |
| <u>Bass Lake</u> | <u>200 Feet</u> |
| <u>Folsom Lake</u> | <u>200 Feet</u> |
| <u>Jenkinson Lake (Sly Park)</u> | <u>200 Feet</u> |
| <u>Slab Creek Reservoir</u> | <u>200 Feet</u> |
| <u>Stumpy Meadows Reservoir</u> | <u>200 Feet</u> |
| <u>Rivers</u> | |
| <u>American River (Middle and South Forks)</u> | <u>100 Feet</u> |
| <u>Cosumnes River (North, Middle and South Forks)</u> | <u>100 Feet</u> |
| <u>Rubicon River</u> | <u>100 Feet</u> |
| <u>Streams and Creeks</u> | |
| <u>Big Canyon Creek</u> | <u>50 Feet</u> |
| <u>Deer Creek (South of US Highway 50 only)</u> | <u>50 Feet</u> |
| <u>Camp Creek</u> | <u>50 Feet</u> |
| <u>Clear Creek</u> | <u>50 Feet</u> |
| <u>Martinez Creek</u> | <u>50 Feet</u> |
| <u>Pilot Creek</u> | <u>50 Feet</u> |
| <u>Weber Creek</u> | <u>50 Feet</u> |

8. Coordination with Other Regulatory Agencies

All required permits from the California Department of Fish and Game, the U.S. Army Corps of Engineers, regional water quality control board(s), California State Water Resources Control Board, or other applicable agencies, shall be obtained prior to commencement of construction. Evidence of approval or pending approval of any such

permit shall be provided to the county, including all appropriate supporting materials, environmental documentation, and studies.

~~9. — **Discretionary Applications and Setback Waivers.** Public notice for a project involving a riparian setback waiver, regardless of application type, shall comply with the requirements under Article 5 (Planning Permit Procedures) for the specific application type or, if applicable, Section 17.54.070 (Revisions to an Approved Project), and the following:~~

~~a. — In addition to any other information required for a project application, a request for setback relief shall include:~~

~~(1) — A biological survey prepared by a qualified professional, to provide the basis for making the finding under Subparagraph b.(1) below, unless waived by the Director upon determining that no biological resources could be affected by granting the waiver;~~

~~(2) — A description of the feature or features subject to the waiver and the extent of the setback relief being proposed;~~

~~(3) — A description of potential design changes for the project that would eliminate or reduce the need for the waiver;~~

~~(4) — A statement why the waiver is deemed necessary by the applicant; and~~

~~(5) — Mitigation proposed to offset any harmful effects of the waiver.~~

~~b. — Each discretionary waiver shall be subject to the following findings, regardless of the type of project application under which the request is considered:~~

~~(1) — The location and extent of the requested relief will minimize impacts to scenic resources, water quality, and riparian habitat, including opportunities for wildlife habitation, rest, and movement;~~

~~(2) — The waiver will not limit the County's design options for providing flood control measures;~~

~~(3) — The waiver will not prevent the implementation of other County adopted plans, nor increase the adverse environmental effects of implementing such plans;~~

~~(4) — There are circumstances applying to the site, such as size, shape, or topography, that do not apply generally to land in the vicinity with the same zone, that would deprive the property owner of privileges enjoyed by other property owners in the vicinity with the same zone; and~~

~~(5) — The waiver is necessary to allow "reasonable use" of the property.~~

17.30.040 Height Limits and Exceptions


All structures and buildings shall conform to the maximum height requirements established for the zone in which the lot is located as set forth in Chapters 17.21 through 17.26 inclusive, subject to the exceptions under Subsection C, unless a Development Plan or Conditional Use Permit is approved allowing additional height, in compliance with Sections 17.52.060 or 17.52.070, respectively.

A.— Measurement of Building Height. The height of a building is determined by calculating the average finished grade of each building wall, and measuring the height between this average finished grade and the highest point of the building, as shown in

Figure 17.30.040.A below. Where a retaining wall supporting a drop in grade is within a five foot horizontal distance from the exterior wall, the height of the retaining wall shall be included in the building height. If each building wall has a different height, then ~~an~~ the average height of all four walls is calculated to determine the actual building height, as shown in Figure 17.30.040.A.


Figure 17.30.040.A

EXAMPLE: BUILDING HEIGHT CALCULATION

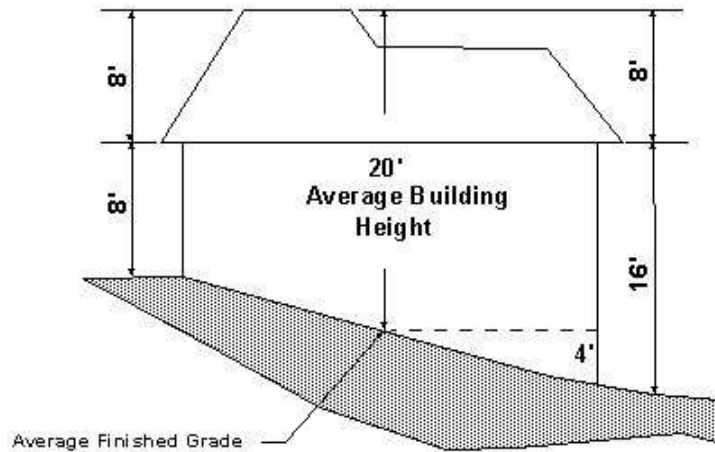

B. Building Height Calculation for Determination of Side Yard Setback in Residential Zones. This Subsection shall apply in all zones that require setbacks of less than 30 feet. To calculate side yard setbacks based on building height, the wall facing the side yard shall be measured in compliance with Subsection A above for average grade, but in this case the highest point of the building shall be that highest point within ten feet from the surface of the wall being measured, as shown in Figure 17.30.040.B below:

Figure 17.30.040.B Example: Building Height Determination for Side Yard Setbacks

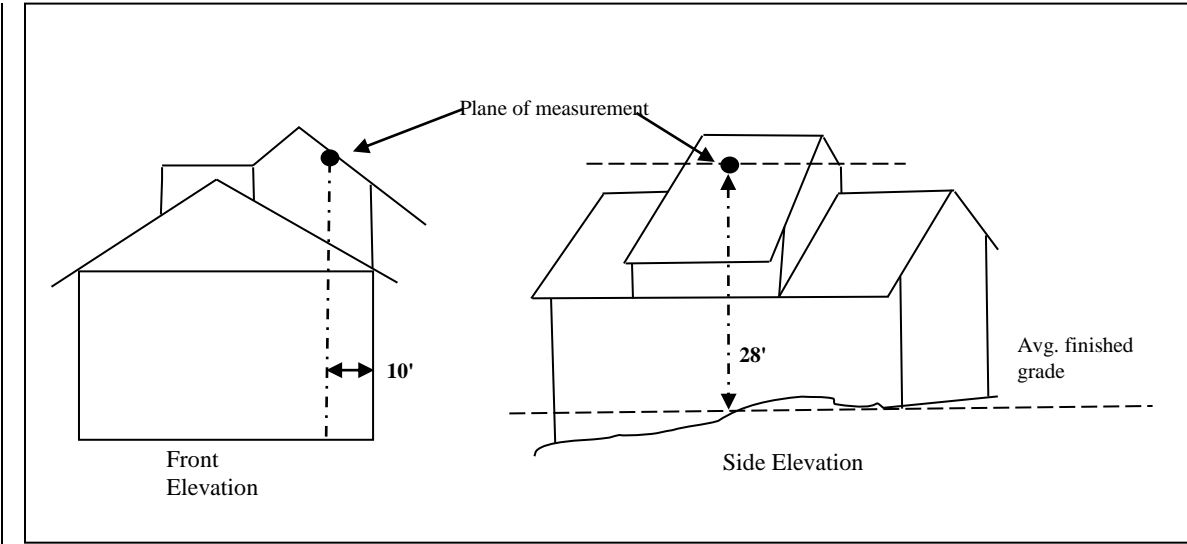

For purposes of calculating the side yard setback, every foot or fraction thereof over a 25 foot height, as measured according to this Subsection, shall increase the setback by one foot. As demonstrated in Figure 17.30.040.B, the highest point measured, at 28 feet, shall increase the side yard setback by three feet.


C.- Exceptions to Building Height Requirements.

Chimneys; church spires; elevator, mechanical and stair housings; flag poles; towers; vents; and other similar structures which are not used for human activity may be up to 20 percent higher than the maximum height requirements in all zones where the excess height is not prohibited by Sections 17.27.020 (Airport Safety Combining Zone) ~~or 17.27.110 (Design Review Scenic Corridor Combining Zone)~~. The use of towers or similar structures to provide higher ceiling heights for habitable space shall be deemed a use intended for human activity. No such structure shall be employed for any commercial or advertising use unless specifically allowed by the applicable zone, except that antennas and associated equipment may be located within such structures.

17.30.050 Fences, Walls, and Retaining Walls

A. Measurement of Fence Height. Fence height shall be measured as the vertical distance between the natural or finished grade at the base of the lowest side of the fence, and the top edge of the fence material, as shown in ~~f~~Figure 17.30.050.A below:

Figure 17.30.050.A Example: Fence Measurement

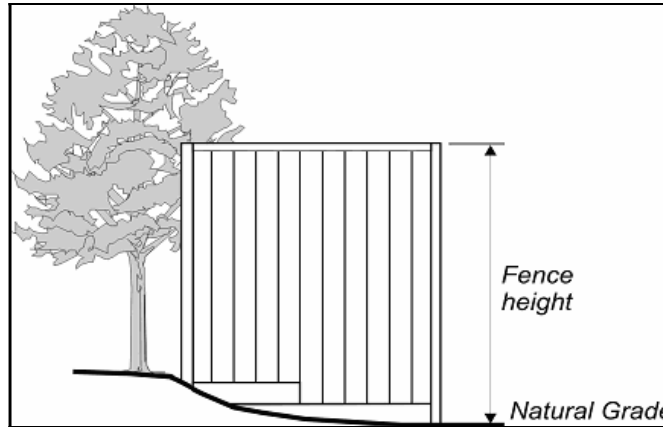


B. Front Yards. In all zones and for non-agricultural uses, the following fence and wall requirements shall apply within required front yard setback areas:

1. Fences or walls at least 50 percent open shall be ~~permitted~~allowed up to a height of seven feet in both primary and secondary front yard setbacks, as determined in Subparagraph 17.30.030.A.4.a.
2. Fences or walls which are less than 50 percent open shall not exceed 40 inches in height in the primary front yard setback.
3. The setback for a retaining wall greater than 36 inches in height may be reduced by 50 percent where the slope gradient for the front half of the lot exceeds 25 percent, providing:
 - a. The exposed height shall not exceed seven feet.
 - b. Any fence erected on the top of a retaining wall shall meet the requirements identified in this section for height, construction, and cross-visibility area (CVA) purposes.
4. Retaining walls that exceed the standards in 3.a above shall be subject to a Minor Use Permit (Section 17.52.020).
5. Retaining walls necessary to provide site access or that do not exceed 36 inches in exposed height shall not be subject to setback requirements. In addition, such walls may be allowed within public utility easements but not within drainage easements.
36. Fences or walls less than 50 percent open may be ~~permitted~~allowed up to a height of seven feet in the secondary front yard setback, but not less than 10 feet from the property line, right-of-way, or road easement where the property line is the center line of the road, subject to the cross-visibility area (CVA) restrictions in Paragraphs 47 and 58 below.

47. At a corner formed by any encroachment onto a road, no fence or wall greater than 40 inches in height shall be placed within the CVA consisting of a triangle having two sides 15–10 feet long, running along the driveway/encroachment edge and the road edge-of-pavement, said length beginning at their intersection, and the third side formed by a line connecting the two ends, as shown in Figure 17.30.050.B below (See #1).
58. On corner lots, no fence or wall greater than 40 inches in height shall be placed within the CVA consisting of a triangle having two sides 35–25 feet long, running along each right of way or road easement, said length beginning at their intersection, and the third side formed by a line connecting the two ends, as shown in Figure 17.30.050.B below (See #2):

Figure 17.30.050.B Cross Visibility Areas (CVA)

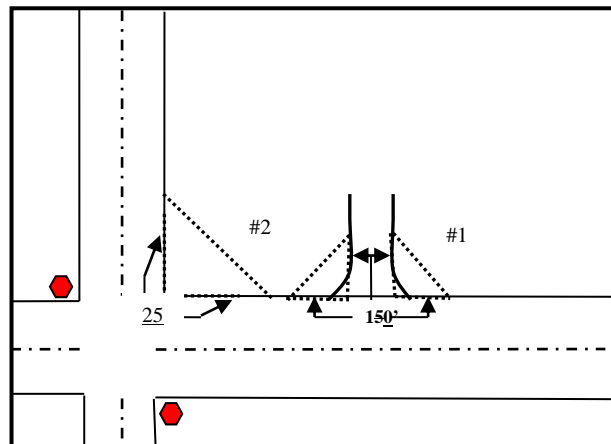

- C. **Side and Rear Yards.** In all zones, fences, walls, cut retaining walls, or fences and walls that are erected within five feet of a retaining wall shall be ~~permitted~~ allowed within required side and rear yard setbacks to a maximum cumulative height of seven feet. Fences, walls, or fences and walls that are erected within five feet of a retaining wall such that the cumulative height exceeds that are over seven feet, but does not exceed ten feet in cumulative height, may be ~~permitted~~ allowed subject to the following:

1. Where the height of the fence or fence and wall is more than seven feet above the natural or finished grade of the adjoining adjacent property, Aa signed and notarized statement from adjoining the adjacent property owners that the proposed fence or wall, as described or shown in an attached exhibit, will not impact their view nor will it restrict light or movement of air and, therefore, they have no objection to the construction of the fence or wall;
2. Director review of the notarized statement(s) to determine if it adequately represents ~~adjoining the adjacent~~ affected property. If such determination is made by the Director, the proposed fence or wall shall be approved through the


Administrative Permit process (17.52.010). The Director may require additional notarized statements from neighboring properties if, in his/her opinion, they may be impacted by the fence or wall; and

—3. Issuance of a building permit where required by the applicable Building Code.

D. Agricultural Uses. On lots that are located in the R1A, R2A, R3A, RE, RL, AG, PA, LA, FR, and TPZ zones, agricultural fencing, as defined in Article 8, shall be ~~permitted~~ allowed in any setback area provided it does not exceed 14 feet in height.

E. Retaining Walls. For the purposes of calculating fence or wall height, the height of a retaining wall is included in the calculation if the fence or wall is located on top of or within five feet of the retaining wall. A sloped area, if it exists between the retaining wall and the fence or wall shall be included in the height calculations as noted in Figure 17.30.050.C below:

Figure 17.30.050.C Example: Retaining Wall/Fence Measurements

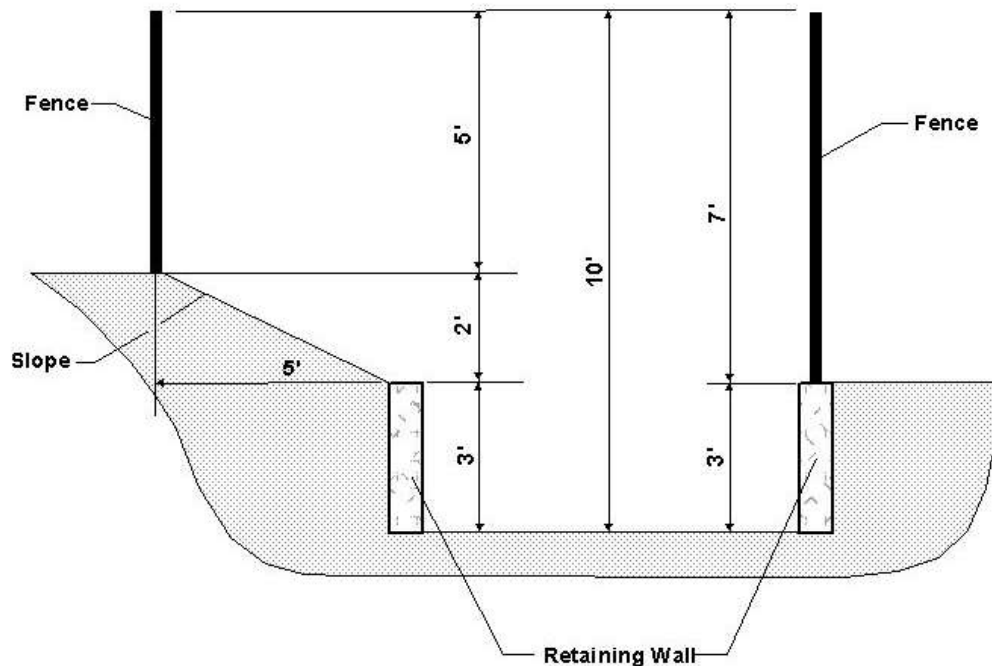

F. Fences shall not be ~~permitted~~ allowed within a road easement or ~~C~~ county maintained right-of-way except as provided below:

1. Gates and decorative entryways to a non-county maintained road system subject to the requirements under Section 17.30.070;
2. In RE, RL, AG, PA, LA, FR, and TPZ zones, agricultural fencing as defined in Article 8, may be located within a ~~C~~ county-maintained right-of-way or non-

county maintained road easement, provided that the fence is located a minimum of five feet outside of all improved areas, including roadside drainage features and cut or fill slopes. When located within a county-maintained right-of-way or non-county maintained road easement, the property owner shall be required to remove or relocate said fence at the time any work or improvements are being made within the right-of-way or at the County's discretion when necessary to ensure the public health, safety, and welfare.

G. Concertina wire, serpentine wire, barbed wire, razor wire, and other similar fencing materials capable of inflicting significant physical injury shall be prohibited. A Minor Use Permit will be required to allow these materials if it can be demonstrated that the proposed fencing is reasonably necessary to protect persons or property and will not constitute a safety hazard to members of the public conducting themselves in a lawful manner. In no event shall these fencing materials protrude into or over the public right-of-way. These regulations shall not apply to fencing required by court order, or when being used for animal husbandry and/or grazing operations.

H. Fences and walls not located within any of the required setback or cross-visibility areas are limited in height only by the building height limitations of the zone in which they are located.

I. A building permit shall be required, in compliance with Chapter 15.16, for any fence over six feet in height, or as otherwise required by Title 15.

J. Fences or walls shall not exceed the requirements of this Section unless and until a Minor Use Permit is granted in compliance with Section 17.52.020.

K. Columns, pilasters, and support structures, and the decorative elements thereon associated with a fence or gate located on or within required setbacks may exceed the height limit provided they meet the following criteria:

1. They do not exceed eight feet in height, and
2. They are not located closer than 16 feet on center, and
3. The fencing materials do not cumulatively exceed the see-through fence standard, where applicable, and
4. They do not interfere with the cross visibility area (CVA) associated with any street or driveway.

17.30.060 Hillside Development Standards; 30 Percent Slope Restriction-

A. Content.

This Chapter contains standards to implement General Plan policies applicable to development within hillside areas. This Chapter regulates disturbance and development on existing lots containing slope gradients thirty percent (30%) or greater in all zones, provides for exceptions to allow reasonable use of property, relieve burdens on and promote agricultural production and protect the public health and safety.

Standards applicable to the creation of new lots or modification of existing lots (through the Boundary Line Adjustment process) containing slopes greater than thirty percent (30%) are found in the *Hillside Design Standards* of the El Dorado County Land Development Manual. The standards in this Title and the Land Development Manual are provided to supplement other applicable regulations by providing additional planning and design tools to enable creative site planning, meeting the challenges of steep terrain, while minimizing the effects of construction on the hillside.

B. Applicability; Slope Gradient Calculation.

These standards in this Section shall apply to any development that will result in ground disturbance on any portion of an existing lot with a natural gradient of at least 30 percent (30 feet of vertical distance for every 100 feet of horizontal distance) and a vertical elevation height of at least 50 feet.

The calculation of site gradient shall exclude the following:

1. Artificial slopes created under a permit issued by the county or for which a permit was not required at the time the slopes were created.
2. Slopes designated as open space or non-building areas in a Specific Plan or Planned Development, or protected through an open space designation, slope easement or other similar covenant.
3. Areas of a site outside the area proposed for development, grading or other construction activity
- ~~— Areas of a site outside the area proposed for development, grading or other construction activity.~~

C. Development Standards applicable to slopes 30 percent or greater.

Development that will result in ground disturbance on slopes 30 percent or greater with a vertical height of 50 feet or more shall be prohibited, except where reasonable use of the property would be denied, as provided in Subsection E, or the activity is exempt under Subsection D, below.

Any development allowed on slopes 30 percent or greater shall require a grading or building permit and shall include an erosion and sediment control plan in compliance with the County Grading Design Manual.

Where required by the Grading Design Manual, technical studies from qualified professionals, such as soils or geotechnical reports to assess the erosion potential or slope stability may be required. Recommendations for erosion control or slope stabilization measures contained in

the technical reports shall be implemented as a requirement of the grading or building permit. A surety bond, cash deposit or other security acceptable to the County may be required to ensure that long term erosion control measures, such as slope landscaping, are permanently established.

D. Exemptions.

The following types of development are exempt from the provisions of this Section:

1. Development that will avoid disturbance of slopes 30 percent or greater;
2. Development on slopes with a gradient of 30 percent or greater and a vertical height of 50 feet or less;
3. Construction of public or private streets and roads, emergency vehicle access or driveways;
4. Development approved prior to the adoption of this ordinance which has identified the extent of allowable development. These include approved variances, tentative and final subdivision and parcel maps, planned developments or other actions;
5. Disturbance of existing artificial slopes created under a permit issued by the County or for which a permit was not required at the time the slopes were created;
6. Repair of existing infrastructure, or replacement or repair of existing structures in substantially the same footprint;
7. Disturbance on slopes necessary for public safety, such as removal of poisonous or noxious plants, controlled removal or thinning of vegetation as part of a fire protection program, or other public safety purpose;
8. Development of a public trail comprising a component of the County's regional parks and trails master plans;
9. Projects located in the Tahoe Basin. Such projects are subject to the policies and regulations of the Tahoe Regional Planning Agency Code of Ordinances;
10. Underground utilities with accessory above ground components, utility poles and guy wires, and other similar features;
11. Agricultural activities that utilize best management practices (BMPs), as recommended by the County Agricultural Commission and adopted by the Board.

E. Reasonable Use of Existing Lots or Parcels.

Where reasonable use of an existing lot or parcel would otherwise be denied, development or disturbance of steep slopes is allowed under the reasonable use criteria in this Section. Reasonable use guidelines are applied based on the type of development proposed. The reasonable use criteria in this Title are not applicable to new subdivisions, or to the modification of existing parcels under the Boundary Line Adjustment process. Standards for new subdivisions or modifications of existing parcels are found in the *Hillside Development Standards* of the Land Development Manual.

1. Single Family Residential on Existing Legal Lot. Development on existing, legally created parcels comprised of slopes that have a gradient of 30 percent or greater is ~~permitted~~ allowed if ground disturbance related to development of the primary structure and any accessory structures and uses meets the following criteria:
 - a. Minimize Area of Disturbance. The proposed total disturbance area on the parcel, excluding areas for septic systems, domestic water wells and driveways, shall not be greater than the thresholds contained in Table 17.30.060.A, based on the parcel size:

Table 17.30.060.A Allowed Disturbance Area for Residential Parcels

| <u>Parcel Size</u> | | | |
|---|--|---|--|
| <u>Less than 1 acre</u> | <u>1.0 acre to 1.5 acres</u> | <u>1.5 acres to 4.0 acres</u> | <u>Greater than 4.0 acres</u> |
| <u>35 percent of parcel area</u> | <u>15,000 square feet, plus 14 percent of area over 1 acre</u> | <u>18,000 square feet, plus 12 percent of area over 1.5 acres</u> | <u>32,000 square feet plus 10 percent of the area over 4 acres</u> |
| <u>All resulting values rounded up to the next 1,000 square feet</u> | | | |

- b. Minimize Grading. Minimize the impact of grading to the extent feasible through measures such as stepped foundations instead of graded pads, configuration of structures and grading to minimize the impact on natural topographic contours, rounding of cut and fill slopes, and the use of retaining walls to reduce the area of disturbance of slopes 30 percent or greater.
- 2.- Non-Residential and Multi-Family Residential Development on Existing Legal Lots. Lands designated for non-residential and multi-family residential are limited in extent and distribution to a small number of parcels, generally within Community Regions and Rural Centers. Development or disturbance of slopes 30 percent or greater will be allowed where:
 - a. The proposed use is consistent with the General Plan and Zone designation for the property;
 - b. The development or disturbance will not impair the stability of slopes on the property or on surrounding properties;

c. The development or disturbance will conform to the requirements of the County Grading Ordinance, including best management practices for erosion and sedimentation control;

d. Design techniques have been utilized, where feasible, to respect natural contours, including rounding of cut and fill slopes to minimize abrupt edges;

e. The proposed use complies with the development standards of Subsection C., above.

3. Reasonable use determinations for ministerial projects will be made by the Director or Building Official based on the criteria above. The determination of reasonable use for discretionary projects will be made as part of the discretionary review of the proposed project. The reasonable use determination may be appealed in the manner set forth in Section 17.52.090 of this code.

F. -Reasonable Use Criteria for Placement of Septic Systems on Existing Legal Lots or Parcels.

General Plan Policy 7.1.2.1 restricts the placement of septic systems to on steep slopes. Where public or private sewer service is unavailable, septic systems are integral to the development of most structures. Thus, the placement of an effluent disposal field on slopes of 30 percent or greater is considered as part of the reasonable use determination required for the development of parcels with slopes greater than 30 percent.

Septic system components may be located in areas containing slopes greater than 30 percent where alternative locations are not feasible or where the placement would reduce the overall disturbance of slopes. Location of septic system components shall comply with Chapter 15.32 of the County Code, Resolution No. 259-99, and other regulations as determined by the Environmental Management Department. The area of disturbance associated with construction of septic system components is allowed in addition to the reasonable use areas identified above.

Development Standards for Slopes Exceeding 30 Percent Gradient

A. Purpose and Intent. ~~The General Plan Land Use, and Conservation and Open Space Elements provide for the conservation and protection of hillsides and ridgelines, soils, wildlife habitat, vegetation, and open space under Policies 2.3.2.1, 7.1.2.1, and 7.1.2.2. It is the purpose of these development standards to:~~

~~1. Provide for General Plan consistency in regulating disturbance and development on slope gradients of 30 percent and greater in order to maintain natural drainage patterns, minimize erosion, sedimentation, and impervious surfaces, maximize retention of natural vegetation and reduce visual impacts;~~

~~2. Provide a process for the County to consider and authorize exceptions in order to allow reasonable use of property, relieve burdens on and promote agricultural production, and protect public health, safety and welfare; and~~

~~3. Provide review standards to assist the Board, Planning Commission, Director, Transportation Director, and staff in evaluating reasonable use of slopes 30 percent and greater.~~

B. Application and Exemptions

~~1. The provisions of this ordinance shall apply to any building or grading development that result in ground disturbance on slopes 30 percent and greater.~~

~~2. The following types of development are exempt from this ordinance:~~

~~a. Development that will avoid disturbance of all on site and off site land with slopes 30 percent and greater;~~

~~b. Development with previous approvals, prior to adoption of this ordinance, which have defined the specific extent of allowable development within the subject lot. These would include approvals of variances, subdivision maps, parcel maps, planned developments, or other actions in which a building or development envelope has been delineated, or specific criteria adopted as part of a discretionary approval that defines the portion of a lot available for development;~~

~~c. Development that will impact existing artificial slopes previously created under the authority of a permit issued by the County or are otherwise considered nonconforming;~~

~~d. Development activities that are necessary for the interest of public safety, such as the removal of poisonous or noxious plants, the controlled removal or thinning of vegetation as a part of a fire protection program required by a fire district, or other public safety purpose approved by the Director;~~

~~e. Development of a public trail comprising a component of the County's adopted master trails plan or an adopted regional trail plan;~~

~~f. Projects located in the Tahoe Basin. Such projects are subject to the policies and regulations of the Tahoe Regional Planning Agency Code of Ordinances;~~

~~g. Underground utilities with accessory above ground components, utility poles and guy wires, and other similar utility features; or~~

~~h. Agricultural activities that utilize best management practices (BMPs), as recommended by the County Agricultural Commission and adopted by the Board.~~

C. Development Standards

~~1. A grading or building permit shall be required from the County permit authority and shall include an erosion and sediment control plan prepared by a California registered civil engineer in compliance with the County Grading Design Manual.~~

~~2. Performance for long term erosion control shall be established by collection of a cash deposit or other security acceptable to the County, to ensure that vegetation or other recommended erosion control measures are permanently established.~~

17.30.070 Gates

The placement of gates across county-maintained rights-of-way shall be prohibited. The following regulations establish a supplemental review and approval procedure for placing gates across non-county maintained roads or private driveways entering residential and nonresidential development. ~~The regulations established under this Section shall not supersede the provisions of Section 17.30.030 (Setback Requirements).~~ The regulations in this section do not apply to gates serving agricultural uses.

A.- Single- and Multi-unit Residential Development. Single- and multi-unit residential dwellings located on one lot are ~~permitted~~ allowed to construct gates across driveways providing the gates are located a minimum of 20 feet from the edge of ~~right-of-way or~~ pavement, will not swing into a ~~County~~ right-of-way or non-county maintained road or alley, are constructed consistent with applicable fire and building codes, and are in compliance with Subsections D.2 to D.5, inclusive, and D.9 below.

B.- Nonresidential Development. An Administrative Permit (Section 17.52.010) is required to establish gates at nonresidential driveway entrances that will prohibit free access/egress to and from the site by either remaining closed during business hours, such as with manned or automatic toll booths, or when being used to prevent public access after close of business. In addition to requirements under Section 17.52.010, the permit shall be in compliance with Subsections D.1 to D.5, inclusive, and D.9 below.

C. Residential Subdivisions. An Administrative Permit shall be required to establish gates across non-county maintained road(s) within a residential subdivision consisting of two or more lots, including condominium developments. An Administrative Permit to establish gates shall not be approved unless the Director finds all of the following:

- 1.- The gate will not impede public access to a public resource, such as a public park, or interfere with existing or planned traffic circulation patterns; and
2. The project conforms to the standards of Subsection D below.

D.- Design Standards for Gated Developments. The following standards shall be required in the design of gated developments. Deviation from these standards shall require a Conditional Use Permit in compliance with Section 17.52.020, except where conditions are included in a development plan permit or other project conditions.

1. All Administrative Permits shall be subject to ~~the review and approval of~~ by the Department of Transportation and the local fire district.
2. Design and location of gates shall be consistent with Title 12 (Streets, Sidewalks, and Public Places) of the County Code.
- 3.- Road widths and gate openings shall conform to the minimum requirements of ~~the fire code.~~ Title 14 Fire Safe Regulations.
4. At least one lane in each direction shall provide a minimum of 14 feet of ~~Unobstructed vertical clearance shall be a minimum of 14 feet.~~
5. Gates shall be equipped with an emergency access lock system (approved by the fire department) that shall consist of a padlock in series on manual gates or a key switch on automatic gates. Automatic gates shall also be equipped with a receiver to allow remote activation by emergency vehicles to the satisfaction of the Sheriff's Department and the applicable fire department. Automatic gates shall be equipped with a mechanical release and a loop system to keep the gate open as long as traffic is passing through, and shall be designed to remain in the unlocked position during a power failure.
- 6.- Gated entrances shall be designed in compliance with the El Dorado County Land Development Manual as to approach distance between the gate and the road in order to accommodate vehicular stacking, and between the gated entrance and the gate controller to allow vehicles to turn around within the driveway without backing onto the adjacent road.
7. Where entrance gates will create a dead-end road in excess of 150 feet in length, an area shall be provided along said road to allow fire trucks and equipment to turn around. The gradient of the road shall be level enough to allow for safe parking of the emergency vehicle when it is necessary to exit the vehicle for manual gate activation.

- 8. One pedestrian access ~~gate~~ shall be provided at each gated entrance to a residential or non-residential development. This requirement does not apply to a gate to a single family residence.
- 9.- “Anti-directional” devices at gated entrances and exits, such as metal spikes that can cause tire damage, are prohibited.
- 10. Unless already provided for in the recorded CC&R’s for the property or subdivision, a maintenance agreement shall be established and recorded for the gated development. The agreement shall identify, and at all times keep in effect, a legal entity responsible for maintaining the gates and associated features.

17.30.080 Maintenance Agreements~~Reserved~~

~~A. Purpose and Intent.~~ The purpose of the Maintenance Agreement is to ensure proper maintenance provisions are in place where various land or property improvements are held in a form of common ownership.

~~AB. Applicability.~~ Except where recorded CC&R’s for a project provide for the maintenance of common improvements held in common ownership, A maintenance agreement is required for various developments including:

- ~~1. Multi unit residential dwellings, such as apartments, condominiums, and town homes.~~
- ~~2. Planned development projects where common improvements and lands are owned or required to be maintained by the home owners.~~
- ~~3. Commercial or industrial developments as part of a landscaping plan or where parking, lighting, and other common facility maintenance is shared.~~
- ~~4. Other development projects as may be deemed appropriate by the Director.~~

~~BC. Maintenance Agreement Provisions.~~ When required by the County, the following provisions shall apply for the establishment and operation of a maintenance agreement:

- ~~1. Draft agreement review.~~ The applicant shall submit a copy of the proposed maintenance agreement to the Department for review and approval.

~~2. Agreement contents. The items that shall be included in the maintenance agreement are as follows:~~

~~a. Purpose of the agreement, to include but not be limited to protection of property values.~~

~~b. Legal description of the property.~~

~~c. The scope of the agreement with estimated maintenance, repair, and replacement costs.~~

~~d. Provisions for insurance coverage with reference to the common area and the common improvements. The insured amount must be sufficient to cover the replacement value of the common area and the common improvements.~~

~~e. Allocation of costs per unit on a monthly, semiannual, or annual basis.~~

~~f. Method for owner and tenant notification and the process for levying assessments and liens.~~

~~g. Lien foreclosure plan.~~

~~h. Mortgage protection clause.~~

~~i. Stipulation stating that no alterations to the exterior of a building can be made without approval of all owners and the County, if required by an approved Development Plan Permit.~~

~~j. Method for dispute settlement in the event of a disagreement by the owners with reference to assessments, maintenance, or other provision of the agreement.~~

~~k. Provision that no changes to the maintenance agreement can be made without County review and approval.~~

~~3. Recording agreement. The approved maintenance agreement shall be recorded prior to issuance of the first certificate of occupancy for any building or unit within the development. The conditions, covenants, and restrictions of the agreement shall stay with the real property and be binding upon all parties having right, title, or interest in the property, and will run with the land in perpetuity.~~

~~DC. Non-compliance. Where open space or common area improvements are not maintained in a condition consistent with an approved maintenance agreement, the~~

~~C~~ounty may, at its discretion, cause such maintenance to be performed and assess the cost to the affected property owners or responsible homeowners' association, or cause a lien to be placed on the affected property.

CHAPTER 17.31 – AFFORDABLE HOUSING DENSITY BONUS

Sections:

- 17.31.010 ~~Purpose~~Content
- 17.31.020 Definitions
- 17.31.030 Eligibility for Bonus, Incentives, and/or Concessions
- 17.31.040 Bonuses, Incentives, and Concessions Allowed
- 17.31.050 Processing of Requests
- 17.31.060 Continued Availability
- 17.31.070 Location of Bonus Units
- 17.31.080 Time of Construction and Occupancy
- 17.31.090 Design

17.31.010– PurposeContent

As required by California Government Code Section 65915, ~~the purpose of this Chapter contains provisions is to offer to allow~~ a density bonus or other incentives or concessions to developers for the production of housing units affordable to very low, lower, and moderate income households and to senior citizens and/or citizens with disabilities. In offering these incentives, ~~it is the intent of this Chapter to carry~~ carries out the requirements of California Government Code Sections 65915, 65916, and 65917. The regulations set out in this Chapter shall apply to unincorporated areas of the county that are not within the Tahoe Regional Planning Agency's jurisdictional area. (Ord. 4816, 2009)

17.31.020– Definitions

As used in this Chapter, the following words and terms shall have the meanings set forth below:

- A. **“Affordable housing”** means housing affordable to very low, lower, or moderate income households.
 - 1. **“Very low income household”** means a household that earns less than 50 percent of the area median income for El Dorado County, adjusted for family size and updated annually. This term includes extremely low income households earning less than 30 percent of the area median income for the county, adjusted for family size and updated annually. [See Health and Safety Code (HSC) Section 50105].
 - 2. **“Lower income household”** means a household that earns between 50 and 80 percent of the area median income for the county, adjusted for family size and updated annually. (See HSC Section 50079.5).

3. **“Moderate income household”** means a household that earns between 80 and 120 percent of area median income for the county, adjusted for family size and updated annually. (See HSC Section 50093).
- B. **“Density Bonus”** means a density increase over the otherwise allowable maximum residential density under the applicable General Plan designation and Zone District.
- C. **“Incentive”** or **“concession”** represents any of the following:
 1. Reduction in site development standards **or a** modification of zoning code requirements or architectural design requirements that exceed the minimum standards of the Building Code, including, but not limited to, a reduction in the setback and square footage requirements and in the ratio of vehicular parking spaces that would otherwise be required that results in identifiable, financially sufficient and actual cost reductions;
 2. Other concessions or incentives of a regulatory nature identified in the County’s Incentive Based Affordable Housing policy (Note: policy is in development and not yet adopted by the Board), or proposed by the applicant or the County that result in identifiable, financially sufficient and actual cost reductions;
- D. **“Qualifying housing development”** means a single project for five or more residential units constructed within the unincorporated area of the county. For the purpose of calculating a density bonus, the residential units must be on contiguous sites that are the subject of one development application.
- E. **“Senior citizen”** means a person 62 years of age or older, or 55 years of age or older in a senior citizen housing development. (See Civil Code Section 51.3).

17.31.030– Eligibility for Bonus, Incentives, and/or Concessions

- A. In order to be eligible for a density bonus or other incentive or concession as provided by this Chapter, a proposed qualifying housing development shall consist of five or more residential units, either for rent or for sale and where at least one unit is affordable to very low, lower, or moderate income households.
- B. A developer shall be granted a density bonus, incentives and/or concessions described in Section 17.31.040 when he or she agrees to provide at least any one of the following:
 - 1.- At least five percent of the total number of proposed units for very low income households;
 - 2.- At least 10 percent of the total number of proposed units for lower income households;

3. A senior citizen housing development; and/or
 - 4.- At least 10 percent of the total number of proposed units in a condominium project, for persons and families of moderate income.
 5. The donation of land sufficient in size to ~~permit~~ allow development of at least 40 affordable housing units consistent with Government Code Section 65915(h) and Paragraph 17.31.040.A.4B of this Chapter.
 6. The payment of a fee in lieu of providing affordable housing units as established in this Section and Paragraph 17.31.040.A.5D of this Chapter.
- C.- In order to be eligible for a bonus, incentive, and/or concession, the applicant shall ensure that all provisions of this Chapter are met.
- D. All eligible developments shall comply with the Fair Housing Act that protects all citizens from discrimination on the basis of race, color, national origin, religion, sex, ~~handicap~~ disability, or familial status, such as families with children under the age of 18 living with parents or legal guardians, pregnant women, and people trying to get custody of children under 18 years of age.
- E. “Total units” does not include units added by a density bonus in compliance with this Chapter or by any other local policy granting a greater density bonus. (Ord. 4816, 2009)

17.31.040- Bonuses, Incentives, and Concessions Allowed

Qualifying housing development projects that satisfy all applicable provisions of this Chapter shall be entitled to a density bonus and additional incentives or concessions as follows:

- A.- Density Bonus for Reservation of Affordable Units.** The density bonus allowed by this Chapter shall consist of an increase in the number of dwelling units over the otherwise maximum allowable residential density under the applicable General Plan designation and zone. The amount of density bonus to which an applicant is entitled shall vary according to the amount by which the percentage of affordable housing units exceeds the percentages established in Subsection 17.31.030.B. The applicant who requests a density bonus in compliance with this Subsection shall elect which bonus shall be awarded. The density bonus shall be awarded pursuant to the calculations and limitations provided in California Government Code Section 16915(g) for very low, lower, and moderate income units.
- B. Density Bonus for the Dedication of Land.** When an applicant for a subdivision, parcel map, or other residential development project donates land to the County for the development of affordable housing, the applicant shall be entitled to a density bonus consistent with and subject to the provisions of Government Code Section 65915(h).

C. Incentives for Provisions of Child Day Care Centers. When an applicant proposes to construct a housing development that conforms to Subsection 17.31.030.B and includes a child day care center that will be located on the premises of, either as part of or adjacent to, the project, the County shall grant a density bonus or other incentive consistent with Government Code Section 65915(i).

D. Affordable Housing In-Lieu Fee. ~~At such time that~~ If the Board adopts a fee in lieu of providing the affordable housing units established by Section 17.31.030, an applicant may choose to pay said fee in lieu of providing affordable housing.

1. The amount and calculation of the affordable housing in lieu fee and the Affordable Housing Trust Fund Guidelines shall be established by resolution of the Board.
2. The in lieu fee shall be calculated at the time of building permit application. The fee shall be paid at the time of issuance of the building permit, unless proof is provided that the required affordable housing units will be constructed on-site or that an alternative equivalent action was previously approved in accordance with this Chapter.

E. Conversion of Market Rate Housing. When an applicant for a qualifying housing development acquires existing market rate dwelling units and enforces price restrictions on the rental or sale of the existing market rate dwelling units in compliance with this Chapter, he/she shall be entitled to a 15 percent increase above the otherwise maximum allowable density under the applicable General Plan designation and zone. The project must be reviewed as to the appropriateness of the conversion from market rate to income restricted units to minimize neighborhood impacts. It may require design upgrades subject to a Design Review Permit (Section 17.52.030), for compliance with current standards and regulations.

17.31.050– Processing of Requests

A. Requests for density bonuses, incentives, and/or concessions shall be made and evaluated through the County's existing ~~land use~~ permit processes where required, in compliance with Chapter 17.63 (Amendments and Zone Changes), and Chapter 17.52 (Permit Requirements, Procedures, etc.). Where no discretionary permits are otherwise required for a project, consideration of density bonuses, incentives, and/or concessions shall be made through an Administrative Permit (Section 17.52.010).

B. All requests for density bonuses, incentives, and/or concessions shall be subject to the following:

1. **Supporting Information.** If regulatory concessions are sought, the developer shall include information with the application, based on building industry standards, to substantiate that any requested waiver or modification of zoning or subdivision standards is necessary to make housing units affordable to very low, lower, or moderate income households.

2. **Initial Review.** Bonus, incentive, and/or concession requests shall be included as part of the ~~land use~~ permit application and shall be reviewed by the Director. The Director shall notify the applicant within 30 days of the acceptance of the project permit application as complete, whether the project qualifies for the requested additional density, incentive, and/or concession.
3. **Criteria to be Considered.** The requested bonus, incentive, and/or concession shall be reviewed for consistency with the General Plan and other applicable ~~County~~ regulations. Particular attention shall be given to application of Housing Element policies and policies addressing the source and distribution of potable water, the type and scale of available wastewater disposal and treatment, and roadway capacity.
4. **Findings for Approval.**
 - a. In addition to the findings required for approval of the proposed project, support of a density bonus by the appropriate review authority shall also require the following special findings:
 - (1)- There are sufficient provisions to guarantee that units will remain affordable in the future, consistent with the requirements of Section 17.31.060 (Continued Availability of Affordability) and the California Government Code Sections 65915(c) and 65915(h)(4).
 - (2) Adequate evidence exists to indicate that development of the subject property in compliance with a valid ~~land use~~ permit or entitlement will result in the provision of housing affordable to very low, lower, and moderate income households in a manner consistent with ~~the purpose and intent of this Chapter.~~
 - (3)- The number of dwelling units approved by the ~~land use~~ permit or entitlement can be accommodated by existing and/or planned infrastructure, consistent with General Plan requirements for concurrency for such services.
 - b. The ~~County~~ shall grant the requested bonus, concession(s), and/or incentive(s) requested by the applicant unless the ~~County~~ makes a written finding, based upon substantial evidence, of either of the following:
 - (1) The concession or incentive is not required in order to provide for affordable housing costs, as defined in California Health and Safety Code Section 50052.5, or for rents for the targeted units to be set as specified in California Government Code Section 65915(c); or
 - (2) The concession or incentive would have a specific adverse impact, as defined in paragraph (2) of subdivision (d) of California Government Code Section 65589.5, upon health, safety, the physical environment, or any real property that is listed in the California Register of Historical Resources and for

which there is no feasible method to satisfactorily mitigate or avoid the specific adverse impact without rendering the development economically infeasible to very-low, lower, and moderate income households. (Ord. 4816, 2009)

17.31.060– Continued Availability of Affordability

A. Affordability shall be based on the following:

1. Affordable Rental Housing is a rental dwelling for which the total monthly expense of rent plus the standard County Housing Authority utility allowance, does not exceed 30 percent of the maximum monthly income limit for very low and low income households in the County as established and updated yearly by the State Department of Housing and Community Development. (California Government Code Section 65915(c)(1))

2. An Affordable Purchase Price is the sales price at which the affordable unit will be offered to prospective eligible buyers. The monthly housing cost factors required to be included in the calculation of the Affordable Housing Price shall be provided by the County based on the average total monthly housing expenses during the first calendar year of a household's occupancy, including but not limited to property taxes, homeowner's insurance, homeowner's association dues, if any, mortgage loan principal and interest, mortgage insurance, and Mello Roos or other applicable assessments, which are equal to or less than one-twelfth) of 35 percent of no greater than 120 percent of Median Family Income, adjusted for Household Size based on an occupancy standard of one-person per bedroom, plus one additional person (for example, a three-bedroom home will be priced based on the income of a four-person family).

B. The ~~land use~~ permit application for the development project shall include the procedures proposed by the developer to maintain the continued affordability of all very low, lower, and senior citizen units, as follows:

1.- Maintain affordability for at least 30 years for units that were built with the assistance of County funding, including assistance in the forms of contributions to the cost of infrastructure, write-down of land costs, or construction cost subsidization.

2.- Maintain affordability as required by the construction or mortgage financing assistance program, mortgage insurance program, or rental subsidy program, typically for a minimum of 30 years.

C.- Moderate income condominium or planned development units approved and/or constructed in compliance with this Chapter shall remain affordable for at least 20 years.

1. If such units are sold within the 20 year affordability time frame, the seller of the unit shall retain the value of any improvements, the down payment, and the seller's proportionate share of appreciation.
 2. The County shall recapture its proportionate share of appreciation, which shall then be used within three years for any of the purposes promoting home ownership, as described in Health and Safety Code Section 33334.2(e).
- D. The developer shall be required to enter into an Affordable Housing Agreement with the County. The Agreement shall delineate those concessions to be made by all parties to ensure that affordable housing can be and is constructed and remains available to the residents for a period of time consistent with Subsection 17.31.060.B and C above. The developer or his/her successor in interest shall not sell, rent, lease, sublet, assign, or otherwise transfer any interests for same without written approval of the County Housing Authority, confirming that the cost of the units will remain consistent with the limits established for the affected density bonus. The Agreement shall also establish specific compliance standards and remedies available to the County upon failure by the developer to make the target units available to intended households. (Ord. 4816, 2009)

17.31.070– Location of Bonus Units

Units affordable to very low, lower, or moderate income households constructed in compliance with this Chapter shall be approved under a single development application and be built within one-quarter mile of the boundary of the proposed housing development, unless the County and developer agree to an alternative site for development in the Affordable Housing Agreement. (Ord. 4816, 2009)

17.31.080 Time of Construction and Occupancy

Units affordable to very low, lower, or moderate income households must be constructed concurrently with nonrestricted units and shall be made available for occupancy not later than the time at which the first nonrestricted dwelling unit is available for occupancy, unless the County and developer agree within the Affordable Housing Agreement to an alternative schedule for development and occupancy. (Ord. 4816, 2009)

17.31.090 ____–Design

Except as provided for in Paragraphs 17.31.040.A.4 and 5 (Bonuses, Incentives, and Concessions Allowed), units affordable to very low, lower, or moderate income households shall be built on-site and be dispersed throughout the housing development wherever feasible. In addition, the number of bedrooms of the units affordable to very low, lower, or moderate income households shall be equivalent to the bedroom mix of the nonrestricted units of the housing development unless the County and developer agree within the Affordable Housing Agreement to an alternative mix. The developer may include a higher proportion of units affordable to very low, lower, or moderate income households with more bedrooms. The

design and appearance of the units affordable to very low, lower, or moderate income households shall be compatible with the design of the total housing development. (Ord. 4816, 2009)

CHAPTER 17.32 – FLOOD DAMAGE PREVENTION

Sections:

- 17.32.010 Statutory Authorization, Findings of Fact, ~~Content~~Purpose, Intent and Methods
- 17.32.020 Definitions
- 17.32.030 General Provisions
- 17.32.040 Administration
- 17.32.050 Provisions for Flood Hazard Reduction
- 17.32.060 Variance Procedures

17.32.010– Statutory Authorization, Findings of Fact, ~~Purpose, Intent~~Content and Methods

A. Statutory Authorization. The legislature of the state has in Government Code, Sections 65302, 65560, and 65800, conferred upon local governments the authority to adopt regulations designed to promote the public, health, safety, and general welfare of its citizenry. Therefore, the Board of Supervisors of El Dorado County does hereby adopt the following floodplain management regulations.

B. Findings of Fact.

1. The flood hazard areas of the ~~C~~county are subject to periodic inundation, which could result in loss of life and property, health and safety hazards, disruption of commerce and governmental services, extraordinary public expenditures for flood protection and relief, and impairment of the tax base, all of which adversely affect the public health, safety and general welfare.
2. These flood losses are caused by uses that are inadequately flood-proofed, elevated or otherwise protected from flood damage. The cumulative effect of obstructions in areas of special flood hazards that increase flood heights and velocities also contribute to flood losses.

C. ~~Purpose and Intent~~Content. ~~It is the purpose of t~~This ~~Ordinance~~Chapter ~~to~~ implements General Plan Policy 6.4.1.1 requiring continued participation in the National Flood Insurance Program in order to promote the public health, safety, and general welfare, and to minimize public and private losses due to flood conditions in specific areas. This ~~Ordinance~~Chapter serves to provide legally enforceable regulations applied uniformly throughout the community to all publicly and privately owned land within flood prone areas. These regulations are designed to:

1. Protect human life and health;
2. Minimize expenditure of public money for costly flood-control projects;
3. Minimize the need for rescue and relief efforts associated with flooding and generally undertaken at the expense of the general public;

4. Minimize prolonged business interruptions;
5. Minimize damage to public facilities and utilities such as water and gas mains; electric, telephone and sewer lines; and streets and bridges located in areas of special flood hazard;
6. Help maintain a stable tax base by providing for the sound use and development of special flood hazard areas so as to minimize future blighted areas caused by flood damage;
7. Ensure that potential buyers are notified that property is in a special flood hazard area;
8. Ensure that those who occupy the special flood hazard areas assume responsibility for their actions.

D. Methods of Reducing Flood Losses. In order to accomplish its purposes, this chapter includes regulations to:

1. Restrict or prohibit uses which are dangerous to health, safety, and property due to water or erosion hazards, or which result in damaging increases in erosion, or in flood heights or velocities;
2. Require that uses vulnerable to floods, including facilities that serve such uses, be protected against flood damage at the time of initial construction;
3. Control the alteration of natural floodplains, stream channels, and natural protective barriers, which help accommodate or channel floodwaters;
4. Control the filling, grading, dredging, and other development which may increase flood damage; and
5. Prevent or regulate the construction of flood barriers which will unnaturally divert floodwaters or which may increase flood hazards in other areas.

These regulations take precedence over any less restrictive or conflicting laws, ordinances or codes.

17.32.020 Definitions

Unless specifically defined below, words or phrases used in this Chapter shall be interpreted so as to give them the meaning they have in common usage and to give this ~~Ordinance~~ Chapter its most reasonable application.

“**A zone**” – Area of 100-year flood where base flood elevations and flood hazard factors have not been determined.

“**A1-A30 zones**” – Area of 100-year flood where base flood elevations and flood hazard factors have been determined.

“**Accessory structure**” means a subordinate building or structure detached from the ~~principal~~ primary building or structure on the same lot and incidental to the ~~principal~~ primary building.

“**Accessory use**” means a use which is incidental and subordinate to the ~~principal~~ primary use of the parcel of land on which it is located.

“**Appeal**” means a request for a review of the Floodplain Administrator’s interpretation of any provision of this ~~Ordinance~~ Chapter.

“**B zone**” means areas between limits of the 100-year flood and 500-year flood; or certain areas subject to 100-year flooding with average depths less than one foot or where the contributing drainage area is less than one square mile.

“**Base flood**” means a flood having a one percent chance of being equaled or exceeded in any given year (also called a "100-year flood"). Base flood is the term used throughout this ~~Ordinance~~ Chapter.

“**Base flood elevation**” (BFE) means the elevation shown on the Flood Insurance Rate Map for Zones A1-30, that indicates the water surface elevation resulting from a flood that has a one percent or greater chance of being equaled or exceeded in any given year.

“**Basement**” means any area of the building having its floor subgrade (i.e., below ground level) on all sides.

“**Building**” – see “structure”.

“**Development**” means any man-made change to improved or unimproved real estate, including, but not limited to buildings or other structures, mining, dredging, filling, grading, paving, excavation or drilling operations, or storage of equipment or materials.

“**Encroachment**” means the advance or infringement of uses, plant growth, fill, excavation, buildings, permanent structures, or other development into a floodplain that may impede or alter the flow capacity of the floodplain.

“**Existing manufactured home park or subdivision**” means a manufactured home park or subdivision for which the construction of facilities for serving the lots on which the manufactured home is to be affixed (including, at a minimum, the installation of utilities, the construction of streets, and either final site grading or the pouring of concrete pads) is completed before the effective date of ~~the Ordinance codified in~~ this Chapter.

“**Expansion to an existing manufactured home park or subdivision**” means the preparation of additional sites by the construction of facilities for serving the lots on which the manufactured homes are to be affixed (including the installation of utilities, the construction of streets, and either final site grading or pouring of concrete pads).

“**Flood, flooding, or floodwater**” means a general and temporary condition of partial or complete inundation of normally dry land areas from:

1. The overflow of inland or tidal waters; or
2. The unusual and rapid accumulation of runoff of surface waters from any source;

“**Flood boundary and floodway map (FBFM)**” means the official map on which the Federal Emergency Management Agency or Federal Insurance Administration has delineated both the special flood hazards areas and the floodway.

“**Flood insurance rate map (FIRM)**” means the official map on which the Federal Emergency Management Agency or Federal Insurance Administration has delineated both the special flood hazards areas and the risk premium zones applicable to the community.

“**Flood insurance study (FIS)**” means the official report provided by the Federal Insurance Administration that includes flood profiles, the Flood Insurance Rate Map, the Flood Boundary and Floodway Map, and the water surface elevation of the base flood. The flood insurance study, FIRMs and FBFBMs are on file at the Development Services Department, 2850 Fairlane Court, Placerville, California 95667.

“**Floodplain or flood-prone area**” means an area susceptible to floodwater. Also see “Flood, flooding, or floodwater”.

“**Floodplain Administrator**” is the community official designated by title to administer and enforce the floodplain management regulations. In El Dorado County, this duty falls on the Director of Development Services or his/her authorized representative.

“**Floodplain management**” means the operation of an overall program of corrective and preventive measures for reducing flood damage and preserving and enhancing, where possible, natural resources in the floodplain, including but not limited to emergency preparedness plans, flood control works, floodplain management regulations, and open space plans.

“**Floodplain management regulations**” means this Chapter, the remaining Zoning Ordinance, subdivision regulations, building codes, health regulations, special purpose ordinances (such as grading and erosion control) and other applications of police power that control development in flood-prone areas. This term describes federal, state or local regulations in any combination thereof that provide standards for preventing and reducing flood loss and damage.

“**Floodproofing**” means any combination of structural and nonstructural additions, changes or adjustments to structures that reduce or eliminate flood damage to real estate or improved real property, water and sanitary facilities, structures, and their contents. For guidelines on dry and wet floodproofing, see FEMA Technical Bulletins TB 1-93, TB 3-93, TB 7-93, and subsequent updates.

“**Floodway**” means the channel of a river or other watercourse and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than one foot. Also referred to as “Regulatory floodway”.

“**Floodway fringe**” is that area of the floodplain on either side of the “Regulatory Floodway” where encroachment may be permitted.

“**Functionally dependent use**” means a use which cannot perform its intended purpose unless it is located or carried out in close proximity to water. The term includes only docking facilities, port facilities that are necessary for the loading and unloading of cargo or passengers, and ship building and ship repair facilities, and does not include long-term storage or related manufacturing facilities.

“**Highest adjacent grade**” means the highest natural elevation of the ground surface next to the proposed walls of a structure prior to construction.

“**Lowest floor**” means the lowest floor of the lowest enclosed area - see “Basement”. An unfinished or flood-resistant enclosure that is usable solely for parking of vehicles, building access or storage in an area other than a basement area, is not considered a building's lowest floor provided it conforms to applicable non-elevation design requirements under Section 17.32.050.

“**Manufactured home**” means a structure, transportable in one or more sections, which is built on a permanent chassis and is designed for use with or without a permanent foundation when connected to the required utilities. For floodplain management purposes, the term manufactured home also includes mobile homes, park trailers, and other similar vehicles placed on a site for greater than one hundred eighty consecutive days. The term “manufactured home” does not include a “recreational vehicle.”

“**Manufactured home park or subdivision**” means a lot (or contiguous lots) of land divided into two or more manufactured home lots for rent or sale.

“**Market value**” means the value of the structure shall be determined by estimating the cost to replace the structure in new condition and adjusting that cost figure by the amount of depreciation which has accrued since the structure was constructed.

1. The cost of replacement of the structure shall be based on a square foot cost factor determined by reference to a building cost estimating guide recognized by the building construction industry.
2. The amount of depreciation shall be determined by taking into account the age and physical deterioration of the structure and functional obsolescence as approved by the floodplain administrator, but shall not include economic or other forms of external obsolescence.

Use of replacement costs or accrued depreciation factors different from those contained in recognized building cost estimating guides may be considered only if such factors are included

in a report prepared by an independent professional appraiser and supported by a written explanation of the differences.”

“**Mean sea level**” means, for purposes of the National Flood Insurance Program, the National Geodetic Vertical Datum (NGVD) of 1929, or other datum, to which base flood elevations shown on a community’s Flood Insurance Rate Map are referenced.

“**Modern construction**” means structures for which the “start of construction” commenced on or after April 1, 1986, the initial adoption date of the County’s Flood Damage Prevention Ordinance, and includes any subsequent improvements to such structures, pursuant to the Department of Water Resources Guidelines, for floodplain management purposes.

“**Modern manufactured home park or subdivision**” means a manufactured home park or subdivision for which the construction of facilities for servicing the lots on which the manufactured homes are to be affixed, including at a minimum, the installation of utilities, the construction of streets, and either final site grading or the pouring of concrete pads, is completed on or after April 1, 1986.

“**Obstruction**” includes, but is not limited to, any dam, wall, wharf, embankment, levee, dike, pile, abutment, protection, excavation, channelization, bridge, conduit, culvert, building, wire, fence, rock, gravel, refuse, fill, structure, vegetation or other material in, along, across or projecting into any watercourse which may alter, impede, retard or change the direction and/or velocity of the flow of water, or due to its location, its propensity to snare or collect debris carried by the flow of water, or its likelihood of being carried downstream.

“**One-hundred-year flood**” or “100-year flood” – means a flood having a one percent chance of being equaled or exceeded in any given year (also called a “base flood”).

“**Public safety and nuisance**” as related to Section 17.32.060 of this Ordinance Chapter, means that the granting of a variance must not result in anything which is injurious to safety or health of an entire community or neighborhood, or any considerable number of persons, or unlawfully obstructs the free passage or use, in the customary manner, of any navigable lake, or river, bay, stream, canal, or basin.

“**Recreational vehicle**” means a motor home, travel trailer, truck camper, or camping trailer, with or without motive power, originally designed for human habitation for recreational or emergency occupancy with a living area of 320 square feet or less and bearing the state or federal insignia of approval for recreational vehicles.

“**Regulatory floodway**” means the channel of a river or other watercourse and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than one foot.

“**Remedy a violation**” means to bring the structure or other development into compliance with state or local floodplain management regulations, or, if this is not possible, to reduce the impacts of its noncompliance through such means as protecting the structure or other affected development from flood damages, implementing the enforcement provisions of the

~~Ordinance~~Chapter or otherwise deterring future similar violations, or reducing state or federal financial exposure with regard to the structure or other development.

“**Riverine**” means relating to, formed by, or resembling a river (including tributaries), stream, brook, etc.

“**Special flood hazard area (SFHA)**” means an area in a floodplain subject to a base flood. In El Dorado County, it is shown on an FHBM or FIRM, and all subsequent amendments and/or revisions, as Zones A, A1-A9, A14, A24, or B, which are defined under “A zone”, “A1-A30 zones” and “B zone”.

“**Start of construction**”, as defined in Article 8 and for purposes of this Chapter, includes substantial improvement and other proposed new development. For a substantial improvement, the actual start of construction means the first alteration of any wall, ceiling, floor, or other structural part of a building, whether or not that alteration affects the external dimensions of the building.

“**Structure**” means a walled and roofed building that is principally above ground; this includes a gas or liquid storage tank or a manufactured home.

“**Substantial damage**”. See definition in Article 8.

“**Substantial improvement**”. See definition in Article 8.

“**Variance**” means a grant of relief from the requirements of this ~~Ordinance~~Chapter which permits construction in a manner that would otherwise be prohibited by this ~~Ordinance~~Chapter.

“**Violation**” means the failure of a structure or other development to be fully compliant with this ~~Ordinance~~Chapter. A structure or other development without the elevation certificate, other certifications, or other evidence of compliance required in this ~~Ordinance~~Chapter is presumed to be in violation until such time as that documentation is provided.

“**Water surface elevation**” means the height, in relation to the National Geodetic Vertical Datum (NGVD) of 1929, North American Vertical Datum (NAVD) of 1988, or other datum, of floods of various magnitudes and frequencies in the floodplains of coastal or riverine areas.

“**Watercourse**” means a lake, river, creek, stream, wash, arroyo, channel, or other topographic feature on or over which waters flow at least periodically. Watercourse includes specifically designated areas in which substantial flood damage may occur.

17.32.030 General Provisions

- A. **Application.** This ~~Ordinance~~Chapter shall apply to all development in the SFHAs within the jurisdiction of the ~~C~~county.
- B. **Compliance.** Violation of the following requirements (including violations of conditions and safeguards) shall constitute a misdemeanor. Nothing herein shall

prevent the County from taking such lawful action as is necessary to prevent or remedy any violation.

1. No structure shall hereafter be located, constructed, extended, converted, nor land altered without full compliance with the terms of this Chapter and other applicable regulations.
2. No new critical or high occupancy structures (such as schools and hospitals) shall be located in the 100-year floodplain of any river, stream, or other body of water pursuant to General Plan Policy 6.4.1.3.

C. Abrogation and Greater Restrictions. This Ordinance Chapter is not intended to repeal, abrogate, or impair any existing easements, covenants, or deed restriction. However, where this Ordinance Chapter and another ordinance, easement, covenant, or deed restriction conflict or overlap, whichever imposes the more stringent restrictions shall prevail.

D. Interpretation. In the interpretation and application of this Ordinance Chapter, all provisions shall be:

1. Considered as minimum requirements;
2. Liberally construed in favor of the governing body; and
3. Deemed neither to limit nor repeal any other powers granted under state statutes.

E. Warning and Disclaimer of Liability. The degree of flood protection required by this Ordinance Chapter is considered reasonable for regulatory purposes and is based on scientific and engineering considerations. Larger floods can and will occur on rare occasions. Flood heights may be increased by man-made or natural causes. This Ordinance Chapter does not imply that land outside the special flood hazard areas or uses permitted within such areas will be free from flooding or flood damages. This Ordinance Chapter shall not create liability on the part of the County, any officer or employee thereof, the State of California, or the Federal Emergency Management Agency for any flood damages that result from reliance on this Ordinance Chapter or any administrative decision lawfully made hereunder.

F. Severability. This Chapter and the various parts thereof are hereby declared to be severable. Should any section of this Chapter be declared by the courts to be unconstitutional or invalid, such decision shall not affect the validity of this Chapter as a whole, or any portion thereof other than the Section so declared to be unconstitutional or invalid.

17.32.040 Administration

- A. Designation of the Floodplain Administrator.** The Director of Development Services or authorized representative is appointed to administer, implement, and enforce this chapter by granting or denying development permits in accordance with its provisions.
- B. Duties and Responsibilities of the Floodplain Administrator.** The duties and responsibilities of the Floodplain Administrator shall include, but not be limited to the following:
- 1. Permit Review.** Review all development permits to determine that:
 - a. Permit requirements of this Chapter have been satisfied, including determination of substantial improvement and substantial damage of existing structures;
 - b. All other required state and federal permits have been obtained;
 - c. The site is reasonably safe from flooding;
 - d. The proposed development does not adversely affect the carrying capacity of areas where base flood elevations have been determined but a floodway has not been designated. This means that the cumulative effect of the proposed development when combined with all other existing and anticipated development will not increase the water surface elevation of the base flood more than one foot at any point within El Dorado County; and
 - e. All Letters of Map Revision (LOMRs) for flood control projects are approved prior to the issuance of building permits. Building permits must not be issued based on Conditional Letters of Map Revision (CLOMRs). Approved CLOMRs allow construction of the proposed flood control project and land preparation as specified in the “start of construction” definition.
 - 2. Review, Use and Development of Other Base Flood Data.** The Floodplain Administrator shall obtain, review, and reasonably utilize any base flood elevation and floodway data available from a federal agency, such as that provided by the Federal Emergency Management Agency (FEMA) under the Flood Insurance Study for El Dorado County, or state agency or other source, in order to administer Section 17.32.050 “Provisions for Flood Hazard Reduction”.
NOTE: A base flood elevation shall be obtained using one of two methods from the FEMA publication, FEMA 265, “Managing Floodplain Development in Approximate Zone A Areas – A Guide for Obtaining and Developing Base (100-year) Flood Elevations” dated July 1995.

3. **Notification of Other Agencies.** The Floodplain Administrator shall perform the following tasks prior to a County permit being issued if, as the result of the permit issuance, the following physical changes will occur:
 - a. Alteration or relocation of a watercourse:
 - (1) Notify adjacent ~~adjacent~~ surrounding communities and the California Department of Water Resources;
 - (2) Submit evidence of such notification to the Federal Insurance Administration, Federal Emergency Management Agency; and
 - (3) Assure that the flood-carrying capacity within the altered or relocated portion of said watercourse is maintained.
 - b. Base Flood Elevation changes based on Subsection 17.32.050.D:
 - (1) Submit, or assure that the permit applicant submits, technical or scientific data to FEMA for a Letter of Map Revision (LOMR). Such submissions are necessary so that upon confirmation of those physical changes affecting flooding conditions, risk premium rates and floodplain management requirements are based on current data.
 - c. Changes in corporate boundaries:
 - (1) Notify FEMA in writing whenever the corporate boundaries have been modified by annexation or other means, to include a copy of a community map clearly delineating the new corporate limits.
4. **Documentation of Floodplain Development.** Obtain and maintain for public inspection and make available as needed all certifications, records and permits demonstrating compliance with the requirements of this Chapter. In addition, a record of all variance actions, including justification for their issuance, shall be maintained and submitted in the biennial report to FEMA.
5. **Map Determination.** Make interpretations where needed, as to the exact location of the boundaries of the SFHA, where there appears to be a conflict between a mapped boundary and actual field conditions. The person contesting the location of the boundary shall be given a reasonable opportunity to appeal the interpretation as provided in Subsection 17.32.040.D.
6. **Remedial Action.** Take action to remedy violations of this ~~Ordinance~~ Chapter as specified in Subsection 17.32.030.B.
7. **Biennial Report.** Every two years, complete and submit a Biennial Report to FEMA describing the County's progress in the previous two years in implementing floodplain management measures and on its needs for re-mapping and technical assistance. Submission of this report is required as part of the County's participation in the NFIP.
8. **Planning.** Assure the General Plan is consistent with floodplain management objectives herein.

9. Non-conversion of Enclosed Areas Below the Lowest Floor. -To ensure that the areas below the BFE shall be used solely for parking vehicles, limited storage, or access to the building and not be finished for use as human habitation without first becoming fully compliant with the floodplain management Ordinance in effect at the time of conversion, the Floodplain Administrator shall:

- a. Determine which applicants for new construction and/or substantial improvements have fully enclosed areas below the lowest floor that are five feet or higher;
- b. Enter into a “NON-CONVERSION AGREEMENT FOR CONSTRUCTION WITHIN FLOOD HAZARD AREAS” or equivalent with the County. The agreement shall be recorded with the County Recorder as a deed restriction. The non-conversion agreement shall be in a form acceptable to the Floodplain Administrator and County Counsel; and
- c. Have the authority to inspect any area of a structure below the base flood elevation to ensure compliance upon prior notice of at least 72 hours.

C. Development Permit Process. All development that requires a building or grading permit within a SFHA shall comply with the following requirements:

1. In addition to the standard submittal information required under the building and/or grading permit application, the applicant shall provide the following minimum information:
 - a. Plans in duplicate, drawn to scale, showing:
 - (1) Location of the regulatory floodway when applicable;
 - (2) Base flood elevation information as specified in Subsection 17.32.040.B(2);
 - (3) Proposed elevation in relation to mean sea level of the lowest floor (including basement) of all structures; and
 - (4) Proposed elevation in relation to mean sea level to which any nonresidential structure will be floodproofed, as required in Subsection 17.32.050.A(3.b) of this Ordinance Chapter and detailed in FEMA Technical Bulletin TB 3-93.
 - b. Certification from a registered civil engineer or architect that the nonresidential floodproofed building meets all applicable floodproofing criteria under Section 17.32.050.
 - c. For a crawl-space foundation, location and total net area of foundation openings as required in Subsection 17.32.050.A(3.c) of this

Ordinance Chapter and detailed in FEMA Technical Bulletins 1-93 and 7-93.

- d. Description of the extent to which any watercourse will be altered or relocated as a result of proposed development.
- e. All appropriate certifications, records and permits demonstrating compliance with the requirements of this Chapter.

D. Appeals. The Board of Supervisors shall hear and decide appeals when it is alleged there is an error in any requirement, decision, or determination made by the Floodplain Administrator in the enforcement or administration of this Chapter.

17.32.050 Provisions for Flood Hazard Reduction

A. Standards of Construction. In all SFHAs, the following standards are required:

- 1. **Anchoring.** All new and modern construction and substantial improvement of any structure shall be adequately anchored to prevent flotation, collapse or lateral movement of the structure resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy.
- 2. **Construction Materials and Methods.** All new and modern construction and substantial improvement of any structure shall be constructed:
 - a. With flood-resistant materials and utility equipment resistant to flood damage for areas below the base flood elevation;
 - b. Using methods and practices that minimize flood damage; and
 - c. With electrical, heating, ventilation, plumbing and air conditioning equipment and other service facilities that are designed and/or located so as to prevent water from entering or accumulating within the components during conditions of flooding.
- 3. **Elevation and Floodproofing.**
 - a. **Residential Construction.** All new and modern construction and substantial improvement of any residential structure shall have the lowest floor, including basement:
 - (1) In A1-A9, A14 and A24 Zones, ~~elevated 2 feet~~ at or above the base flood elevation (BFE).
 - (2) In an A zone, without BFEs specified on the FIRM (unnumbered A zone), ~~elevated 2 feet at or above~~ the base flood elevation. The applicant shall identify the SFHA and BFE in compliance with Subsection 17.32.040.B(2);

- (3) Manufactured/mobile homes or Temporary Mobile Home/RV with a Hardship Permit (TMA), placed or substantially improved on a site within any SFHA, shall:
 - (a) Be elevated on a permanent foundation such that the lowest floor of the dwelling unit is ~~elevated 2~~ at or above feet above the BFE, as specified on the FIRM or as determined under Subsection 17.32.040.B(2), and be securely fastened to an adequately anchored foundation system to resist flotation, collapse, and lateral movement.

Prior to the foundation or set-up inspection approval, the elevation of the lowest floor, as defined, shall be certified by a registered civil engineer or licensed land surveyor, and certified by a ~~c~~County building inspector to be properly elevated. Failure to submit elevation certification shall be cause to issue a stop work order for the project. As-built plans certifying the elevation of the lowest adjacent grade is also required. ~~Such certification and verification shall be provided to the Floodplain Administrator.~~

- b. Nonresidential Construction.** All new and modern construction and substantial improvement of any nonresidential structure shall either be elevated to conform to Subsection 17.32.050.A(3.a) of this paragraph or:
 - (1) Be floodproofed, together with attendant utility and sanitary facilities, below the elevation recommended under Subsection 17.32.050.A(3.a), so that the structure is watertight with walls substantially impermeable to the passage of water;
 - (2) Have structural components capable of resisting hydrostatic and hydrodynamic loads and effects of buoyancy; and
 - (3) Be certified by a registered civil engineer or architect that the standards of both Subsections 17.32.050.A(3.a) or (3.b) are satisfied. Such certification shall be provided to the Floodplain Administrator.

- c. Flood Openings.** All new and modern construction and substantial improvements of any structures with fully enclosed areas below the lowest floor (excluding basements) that are usable solely for parking of vehicles, building access or storage, and which are subject to flooding, shall be designed to automatically equalize hydrostatic flood forces on exterior walls by allowing for the entry and exit of floodwater. Designs for meeting this requirement must meet the following minimum criteria:
 - (1) For non-engineered openings:
 - (a) Have a minimum of two openings on different sides having a total net area of not less than one square inch for every square foot of enclosed area subject to flooding;
 - (b) The bottom of all openings shall be no higher than one foot above grade.
 - (c) Openings may be equipped with screens, louvers, valves or other coverings or devices provided that they ~~permit~~ allow the automatic entry and exit of floodwater; and

- (d) Buildings with more than one enclosed area must have openings on exterior walls for each area to allow flood water to directly enter; or
 - (2) Be certified by a licensed civil engineer or architect.
- d. Garages and Low Cost Accessory Structures.**
- (1) Attached Garages.**
 - (a) A garage attached to a residential structure, constructed with the garage floor slab below the BFE, must be designed to allow for the automatic entry of flood waters; see Subsection 17.32.050.A(3.c). Areas of the garage below the BFE must be constructed with flood resistant materials; see Subsection 17.32.050.A(2).
 - (b) A garage attached to a nonresidential structure must meet the above requirements or be dry floodproofed. For guidance on below grade parking areas, see FEMA Technical Bulletin TB-6.
 - (2) Detached Garages and Accessory Structures.**
 - (a) “Accessory structures” used solely for parking, limited storage, or other non-habitable use, may be constructed such that its floor is below the BFE, provided the structure is designed and constructed in accordance with the following requirements:
 - (i) Use of the accessory structure must be limited to non-habitable use;
 - (ii) The portions of the accessory structure located below the BFE must be built using flood-resistant materials;
 - (iii) The accessory structure must be adequately anchored to prevent flotation, collapse and lateral movement;
 - (iv) Any mechanical and utility equipment in the accessory structure must be elevated or floodproofed to or above the BFE;
 - (v) The accessory structure must comply with floodplain encroachment provisions in Subsection 17.32.050.FD; and
 - (vi) The accessory structure must be designed to allow for the automatic entry of flood waters in accordance with Subsection 17.32.050.A(3.c).
 - (b) Detached garages and accessory structures not meeting the above standards must be constructed in accordance with all applicable standards in Subsection 17.32.050.A.
- e. Crawlspace Construction.** This Subsection applies to buildings with crawl spaces up to two feet below grade. Below-grade crawl space construction in accordance with the requirements listed below will not be considered basements.

- (1) The building must be designed and adequately anchored to resist flotation, collapse, and lateral movement of the structure resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy. Crawl space construction is not allowed in areas with flood velocities greater than five feet per second unless the design is reviewed by a qualified design professional, such as a licensed engineer or architect;
- (2) The crawl space is an enclosed area below the BFE and, as such, must have openings that equalize hydrostatic pressures by allowing for the automatic entry and exit of floodwaters. For guidance on flood openings, see FEMA Technical Bulletin 1-93;
- (3) Portions of the building below the BFE must be constructed with materials resistant to flood damage. This includes not only the foundation walls of the crawl space used to elevate the building, but also any joists, insulation, or other materials that extend below the BFE; and
- (4) Any building utility systems within the crawl space must be elevated above BFE or designed so that floodwaters cannot enter or accumulate within the system components during flood conditions.
- (5) Requirements for all below-grade crawl space construction, in addition to the above requirements, to include the following:
 - (a) The interior grade of a crawl space below the BFE must not be more than two feet below the lowest adjacent exterior grade (LAG), shown as D in figure 3 of Technical Bulletin 11-01;
 - (b) The height of the below-grade crawl space, measured from the interior grade of the crawl space to the top of the crawl space foundation wall must not exceed four feet (shown as L in figure 2 of Technical Bulletin 11-01) at any point;
 - (c) There must be adequate drainage system that removes floodwaters from the interior area of the crawl space within a reasonable period of time after a flood event, not to exceed 72 hours; and
 - (d) The velocity of floodwaters at the site should not exceed five feet per second for any crawl space. For velocities in excess of five feet per second, other foundation types should be used.

B. Standards for Utilities.

1. All new and replacement water supply and sanitary sewage systems shall be designed to minimize or eliminate infiltration of floodwaters into the system and discharge from systems into floodwaters.

- 2. On-site waste disposal systems shall be located to avoid impairment to them, such as soil scouring from flood waters, or contamination from them during flooding.

C. Standards for Subdivisions and Other Proposed Development.

- 1. Creation of new lots which lie entirely within the SFHAs as identified on the most current version of the flood insurance rate maps provided by FEMA is prohibited in compliance with General Plan Policy 6.4.1.4.
- 2. New lots which are partially within the SFHAs must have sufficient land available outside the FEMA or County designated SFHAs for construction of dwelling units, accessory structures, and septic systems, while meeting all other required development standards, in compliance with General Plan Policy 6.4.1.5.
- 3. All new subdivision proposals and other proposed development, including proposals for manufactures home parks and subdivisions, shall:
 - a. Identify the SFHAs and the BFEs.
 - b. Identify the elevations of the lowest floors of all proposed structures and pads, if applicable, on the final plans.
 - c. If the site is filled above the BFE, the following as-built information for each structure shall be certified by a registered civil engineer or licensed land surveyor and provided as part of an application for a Letter of Map Revision Based on Fill (LOMR-F) to the Floodplain Administrator:
 - (1) Lowest floor elevation.
 - (2) Pad elevation.
 - (3) Lowest adjacent grade.
- 4. All subdivision proposals shall be consistent with the need to minimize flood damage.
 - a. All subdivision proposals and other proposed development shall have public utilities and facilities such as sewer, gas, electrical, and water systems located and constructed to minimize flood damage.
 - b. All subdivisions and other proposed development shall provide adequate drainage provided to reduce exposure to flood hazards.

D. Floodways.

Since floodways are an extremely hazardous area due to the velocity of floodwaters which carry debris, potential projectiles, and erosion potential, the following provisions apply:

1. Until a regulatory floodway is adopted, no new or modern construction, substantial improvement of any structure, or other development (including fill) shall be permitted within Zones A1-A9, A14 and A24, unless it is demonstrated that the cumulative effect of the proposed development, when combined with all other development, will not increase the BFE more than one foot at any point within the County.
2. Within an adopted regulatory floodway, the County shall prohibit encroachments, including fill, new or modern construction, substantial improvements to any structure, and other development, unless certification by a licensed civil engineer is provided demonstrating that the proposed encroachment shall not result in any increase in flood levels during the occurrence of the base flood discharge.
3. If Subsections 1 and 2 above are satisfied, all new or modern construction, substantial improvement to any structure, and other proposed new development shall comply with all other applicable flood hazard reduction provisions of this Section (17.32.050).

17.32.060 Variance Procedures

- A. Nature of Variances.** The issuance of a variance is for floodplain management purposes only. The variance criteria set forth in this ~~Section of the Ordinance~~ Chapter are based on the general principle of zoning law that variances pertain to a piece of property and are not personal in nature. Insurance premium rates are determined by statute according to actuarial risk and will not be modified by the granting of a variance.

In addition to the specific findings found under Section 17.52.070, approval of a variance for floodplain management purposes must not cause fraud on or victimization of the public. In examining this requirement, the approving authority will consider the fact that every newly constructed building adds to government responsibilities and remains a part of the community for 50 to 100 years. Buildings that are permitted to be constructed below the BFE are subject during all those years to increased risk of damage from floods, while future owners of the property and the community as a whole are subject to all the costs, inconvenience, danger, and suffering that those potential risks bring. In addition, future owners may purchase the property, unaware that it is subject to potential flood damage, and could be insured only at very high flood insurance rates.

The long term goal of preventing and reducing flood loss and damage can only be met if variances are strictly limited. Therefore, the variance guidelines provided in this ~~Ordinance~~ Chapter are more detailed and contain multiple provisions that must be met before a variance can be properly granted. The criteria are designed to screen out those situations in which alternatives other than a variance are more appropriate.

B. Criteria. In passing upon requests for variances, the approving authority shall consider all technical evaluations, relevant factors, standards specified in other sections of this ~~Ordinance~~Chapter, as well as the:

1. Danger that materials may be swept onto other lands to the injury of others;
2. Danger to life and property due to flooding or erosion damage;
3. Susceptibility of the proposed facility and its contents to flood damage and the effect of such damage on the existing individual owner and future owners of the property;
4. Importance of the services provided by the proposed facility to the community;
5. Necessity to the facility of a waterfront location, where applicable;
6. Availability of alternative locations for the proposed use which are not subject to flooding or erosion damage;
7. Compatibility of the proposed use with existing and anticipated development;
8. Relationship of the proposed use to the comprehensive plan and floodplain management program for that area;
9. Safety of access to the property in time of flood for ordinary and emergency vehicles;
10. Expected heights, velocity, duration, rate of rise, and sediment transport of the flood waters expected at the site; and
11. Costs of providing governmental services during and after flood conditions, including maintenance and repair of public utilities and facilities such as sewer, gas, electrical, and water system, and streets and bridges.

C. Provisions.

1. Generally, variances may be issued for new or modern construction, substantial improvement of any structure, and other proposed new development on a lot of one-half acre or less in size ~~adjoining~~adjacent to and surrounded by lots with existing structures constructed below the BFE, providing that the procedures of Sections 17.32.040 and 17.32.050 of this ~~Ordinance~~Chapter have been fully considered. As the lot size increases beyond one-half acre, the technical justification required for issuing the variance increases.
2. Variances may be issued for the repair or rehabilitation of “historic structures”, as defined in Article 8 (“Structure: Historic”), upon a determination that the proposed repair or rehabilitation will not preclude the structure’s continued

- designation as an historic structure and the variance is the minimum necessary to preserve the historic character and design of the structure.
3. Variances shall not be issued within any mapped regulatory floodway if any increase in flood levels during the base flood discharge would result.
 4. Variances shall only be issued upon a determination that the variance is the “minimum necessary”, considering the flood hazard, to afford relief. “Minimum necessary” means to afford relief with a minimum of deviation from the requirements of this ~~Ordinance~~Chapter. For example, in the case of variances to an elevation requirement, this means the approving authority need not grant permission for the applicant to build at grade, or even to whatever elevation the applicant proposes, but only to that elevation which the approving authority believes will both provide relief and preserve the integrity of the Ordinance.
 5. In addition to the findings under Section 17.52.070, variances shall only be issued upon a determination that the granting of a variance will not result in increased flood heights, additional threats to public safety, or extraordinary public expense; and will not create a nuisance (~~Section 17.32.020~~), cause fraud and victimization of the public, or conflict with existing laws or ordinances.
 6. Upon consideration of the factors of Subsection 17.32.060.C(1) and the purposes of this ~~Ordinance~~Chapter, the Board may attach such conditions to the granting of variances as it deems necessary to further the purpose of this ~~Ordinance~~Chapter.
 7. Any applicant to whom a variance is granted shall be given written notice over the signature of the Director that:
 - a. The issuance of a variance to construct a structure below the BFE will result in increased premium rates for flood insurance; and
 - b. Such construction below the BFE increases risks to life and property. ~~It is recommended that a~~A copy of the notice ~~shall~~may be recorded by the Floodplain Administrator in the office of the County Recorder-Clerk and ~~shall be recorded~~ in a manner so that it appears in the chain of title of the affected lot of land.
 8. The Floodplain Administrator will maintain a record of all variance actions, including justification for their issuance, and report such variances issued in its biennial report submitted to FEMA.

CHAPTER 17.33 – LANDSCAPING STANDARDS

Sections:

17.33.010 ~~Purpose~~Content

17.33.020– Applicability

17.33.030 Exemption

17.33.040 ~~Definitions~~

17.33.050 ~~—————~~ Landscape Plan

17.33.060 ~~—————~~ Landscape Standards

17.33.070 ~~—————~~ Irrigation Standards

17.33.080 ~~—————~~ Maintenance and Protection

17.33.090 ~~—————~~ Non-conforming Landscaping

17.33.100 ~~Water Efficient Landscape Plan~~

17.33.110 ~~Water Efficient Landscape Plan Requirements~~

17.33.010- PurposeContent

~~The purpose of t~~This Chapter identifies the use types which require the submittal of landscape plans, subject to the standards in the Design Manual, prior to the issuance of a building permit. Additionally, the Chapter contains landscaping standards that enhance the appearance of development, increase property values, and protect the public health, safety, and welfare by providing buffers; parking lot shading; incentives for outdoor art and water features; a means to reduce impervious surfaces and site runoff by incorporating stormwater best management practices into landscape areas; and requirements for water conservation methods that encourage the use of native, drought tolerant species, reclaimed water and graywater systems. It is further the intent of this Chapter to comply with the Water Conservation in Landscaping Act: Model Water Efficient Landscape Ordinance (Gov. Code 65591 – 65599).

17.33.020– Applicability

All ministerial and discretionary development for industrial, research and development, commercial, multi-unit residential, civic, or utility uses shall provide landscaping for ~~all~~the areas of a lot that do not include footprints of buildings or structures, sidewalks, driveways, parking lots, decks, patios, gravel or stone walks, other pervious or impervious hardscapes, and other non-irrigated areas designated for non-development (e.g., open spaces and existing native vegetation).

A Water Efficient Landscape Plan, in compliance with the provisions of Government Code Sections 65591 through 65599 and this Chapter, may be required. The required components of such plan are described in Section Design Manual.

A landscape plan, in compliance with the standards contained in the site planning and design manual, shall be required prior to the issuance of any building permit subject to the

requirements of this Chapter. Plans shall include a site plan, grading plan, planting plan, irrigation design plan, and all other details and specifications necessary for a complete landscape plan review, on an application form provided by the Department.

17.33.030 ———Exemption

Commercial uses on agricultural, rural lands and resource zoned land shall be exempt from the requirements of this Chapter; except for the following:

- A. A permanent parking lot located adjacent to a public road shall be subject to landscape buffer requirements in compliance with Paragraph 17.33.060.A.1 standards contained in the site planning and design manual.
- B. A permanent paved parking lot shall be subject to the shade requirements under Subsection 17.33.060.C contained in the site planning and design manual.

17.30.040 ———Definitions

As used in this Chapter, the following terms shall have the meanings set forth below:

~~Backflow Prevention Device. A safety device used to prevent pollution or contamination of the water supply due to the reverse flow of water from the irrigation system.~~

~~Certified Landscape Irrigation Auditor. A person certified to perform landscape irrigation audits by an accredited academic institution, a professional trade organization or other program such as the US Environmental Protection Agency's WaterSense irrigation auditor certification program and Irrigation Association's Certified Landscape Irrigation Auditor program.~~

~~Check Valve or Anti drain Valve. A valve located under a sprinkler head, or other location in the irrigation system, to hold water in the system to prevent drainage from sprinkler heads when the sprinkler is off.~~

~~Drip Irrigation or Emitter. Any non-spray low volume irrigation system utilizing emission devices with a flow rate measured in gallons per hour.~~

~~Established Landscape. The point at which plants have developed significant root growth into the soil. Typically, most plants are established after one or two years of growth.~~

~~ET Adjustment Factor (ETAf). A factor of 0.7 that, when applied to reference evapotranspiration, adjusts for plant factors and irrigation efficiency, two major influences upon the amount of water that needs to be applied to the landscape.~~

~~Evapotranspiration Rate. The quantity of water evaporated from adjacent soil and other surfaces and transpired by plants during a specified time.~~

~~Infiltration Rate. The rate of water entry into the soil expressed as a depth of water per unit of time (e.g., inches per hour).~~

~~Irrigation Efficiency (IE). The measurement of the amount of water beneficially used divided by the amount of water applied. Irrigation efficiency is derived from measurements and estimates of irrigation system characteristics and management practices. The minimum average irrigation efficiency for purposes of this Chapter is 0.71. Greater irrigation efficiency can be expected from well designed and maintained systems.~~

~~Landscape Architect. A person who holds a license to practice landscape architecture in the state of California Business and Professions Code, Section 5615.~~

~~Landscape Area. All the planting areas, turf areas, and water features in a landscape plan.~~

~~Local Water District. Any entity, including a public agency, city, county, or private water company that provides retail water service.~~

~~Low Volume Irrigation. The application of irrigation water at low pressure through a system of tubing or lateral lines and low volume emitters such as drip, drip lines, and bubblers. Low volume irrigation systems are specifically designed to apply small volumes of water slowly at or near the root zone of plants.~~

~~Maximum Applied Water Allowance (MAWA). The maximum allowed limit of annual applied water for the established landscape area based upon its size, reference evapotranspiration, and the ET Adjustment Factor.~~

~~Mulch. Any organic material such as leaves, bark, straw, compost, or inorganic mineral materials such as rocks, gravel, and decomposed granite left loose and applied to the soil surface for the beneficial purposes of reducing evaporation, suppressing weeds, moderating soil temperature, and preventing soil erosion.~~

~~New Construction. A new building requiring landscaping or other new landscaping without an associated building, such as a park, playground, or greenbelt.~~

~~Overhead Sprinkler Irrigation Systems. Systems that deliver water through the air, such as spray heads and rotors.~~

~~Plant Factor or Plant Water Use Factor. A factor established in the Department of Water Resources: Water Use Classification of Landscape Species (2000) that, when multiplied by the reference evapotranspiration value (ET_o) for the County, estimates the amount of water needed by plants.~~

~~Precipitation Rate. The rate of application of water measured in inches per hour.~~

~~Reference Evapotranspiration (ET_o). A standard measurement of environmental parameters which affect the water use of plants, so that regional differences in climate can be accommodated. It is based on an estimate of the evapotranspiration of a large field of four to~~

~~seven-inch tall, cool-season grass that is well watered. The ETo for the County is 47.3 inches per year.~~

~~Special Landscape Area (SLA). An area of the landscape dedicated solely to edible plants such as orchards and vegetable gardens, areas irrigated with recycled water, water features, and areas dedicated to active play where turf provides a playing surface, such as parks, sports fields, and golf courses.~~

~~Static Water Pressure. The pipeline or municipal water supply pressure when water is not flowing.~~

~~Station. An area served by one valve or by a set of valves that operate simultaneously.~~

~~WUCOLS. The Water Use Classification of Landscape Species published by the Department of Water Resources, the University of California Cooperative Extension, and the Bureau of Reclamation (2000).~~

17.33.050 — Landscape Plan

- ~~A. — A landscape plan shall be required prior to the issuance of any building permit subject to the requirements of this Chapter. Plans shall include a site plan, grading plan, planting plan, irrigation design plan, and all other details and specifications necessary for a complete landscape plan review, on an application form provided by the Department.~~
- ~~B. — Where the required landscape area exceeds 1,000 square feet in the whole, said plan shall be prepared by a California licensed landscape architect, civil engineer, architect, or landscaping contractor to the extent that his or her license allows.~~
- ~~C. — If a Water Efficient Landscape Plan is required in compliance with Section 17.33.090, further requirements under 17.33.100 will apply.~~
- ~~D. — The Director or applicable review authority may approve an alternative landscape plan when unique circumstances apply to the site that makes compliance with the standards of this Chapter infeasible. Consideration shall be given to adjacent land uses, the nature of the change, existing site conditions, and the suitability of the proposed alternative. The review authority must find that the alternative provides comparable buffering and shading, and otherwise meets the intent of this Chapter.~~
- ~~E. — Prior to issuance of a certificate of occupancy, the applicant shall provide a Certificate of Completion by the preparer of the approved landscape plan that verifies the landscape improvements have been installed in compliance with the approved landscape plan, on a form provided by the Department.~~

17.33.060 — Landscape Standards

~~Landscaping shall conform to the standards set forth below:~~

A. Landscape Buffers. Landscaped buffers shall be required along a road frontage, or property under a different ownership or zone, as follows:

1. Road Frontage.

a. The required buffers along road frontage shall be a minimum of 10 feet in width outside of the right of way and exclusive of any curbs or sidewalks, unless otherwise set forth in the development standards for the zone.


b. Where industrial, research and development, commercial, civic, or utility uses are located across a county maintained road and are visible from residentially zoned lots and parking is provided facing said lots, either of the following shall be required:

(1) An ornamental masonry wall not less than three feet in height from grade shall be installed between the parking spaces and the landscape buffer; or

(2) A minimum three foot high landscaped berm may be provided within the buffer area.

c. Landscape buffers adjacent to public rights of way or road easements shall maintain line of sight visibility subject to the review and approval of the Department of Transportation. No foliage or structural feature between the height of 30 inches and seven feet above grade (Figure 17.33.050.A) shall extend into the cross visibility area (CVA) defined in Section 17.30.050.B.5 (Fences, Walls, and Retaining Walls):

Figure 17.33.060.A

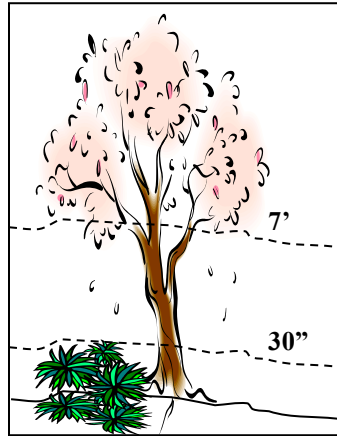

2. Property Lines.

a. The required buffer along property lines shall be a minimum of five feet in width.

- b. ~~Where multiple lots are developed as a single project under common ownership, the landscape buffers shall only be required along the perimeter of the project.~~
- e. ~~Should two or more adjoining lots under separate ownership be designed as a single project with shared uses of access and parking, the required five foot landscape buffer adjacent to the common property line shall not be required when a shared parking covenant and reciprocal easement is recorded between all concerned parties in a form approved by the County.~~
- d. ~~Where industrial, research and development, commercial, civic, or utility uses adjoin residentially zoned lots, either of the following shall be required:
 - (1) ~~A 30 foot wide landscape buffer with a minimum of eighteen trees and 72 shrubs per 100 feet of length; or~~
 - (2) ~~A ten foot landscape buffer with an ornamental masonry wall not less than six feet in height installed at the property line and extending to within 15 feet of any road right-of-way or easement. Within the buffer, a row of evergreen conifer trees shall be planted to provide continuous screening.~~~~

~~B. General Landscape Requirements.~~

- 1. ~~A minimum of six trees and 24 shrubs shall be provided per each 100 linear feet of required landscape buffer along the property boundaries and public roads, with the exceptions under Paragraph A.2.d, above.~~
- 2. ~~All shrubbery and at least 50 percent of required trees shall be evergreen.~~
- 3. ~~Where street lights exist or are proposed to be installed, the size, location, and variety of trees shall be reviewed by the Department of Transportation and designed to minimize conflict between the lighting needs and landscaping requirements.~~
- 4. ~~No landscaping or tree planting shall be installed or maintained in such a manner that the expected growth of the plant or tree material at 15 years will cast a shadow between the peak solar collection hours of 10 a.m. to 2 p.m. on more than ten percent of the solar absorption panels of an existing solar energy device located on site or on adjoining lots. Trees planted before the installation of affected solar panels or their replacement plantings shall be exempt from this requirement.~~
- 5. ~~A minimum of 50 percent drought tolerant plant species shall be used in all landscape plans required by this Section. Shade trees and drought tolerant plant species shall be selected from the Director approved lists in Appendices B and C. Plant species similar to those on the lists may be considered providing they~~

conform to the intent of this Subsection for drought tolerance and adaptability to the area. Species selection shall be based on site elevation in accordance with the lists.

6. ~~To ensure plant diversity, the following standards shall apply to any plant material required to meet the regulations of this Chapter:~~
 - a. ~~Between eight and 23 trees, a minimum of three different species must be used. For 24 trees or more, a minimum of four different species must be used. Existing trees may be included in the calculations.~~
 - b. ~~For 25 shrubs or more, a minimum of three different species must be used.~~
7. ~~Lawn or turf grasses shall constitute no greater than 10 percent of the required landscaping and shall not be planted on slopes greater than 25 percent where the toe of the slope is adjacent to an impermeable hardscape.~~
8. ~~Bark, decorative rock, and similar organic materials, when used to enhance the required plant material, shall be replenished on a routine basis in order to maintain a neat and consistent appearance.~~
9. ~~Any outdoor form of sculpture or other artwork, as well as any water feature such as a fountain, cascade, stream, or reflection pond can be substituted in place of living plant material, with the exception of the buffer and shade requirements, providing:~~
 - a. ~~Artwork or water feature(s) are publicly visible and accessible at the main pedestrian entrance to the building(s) or along a perimeter sidewalk or pedestrian connection;~~
 - b. ~~Artwork or water feature does not contain a corporate name, logo, or slogan in its form or appearance, or it will be counted as a sign;~~
 - c. ~~Substitution will be at a 1:1 ratio based on the square footage of the footprint of the artwork or water feature. When a water efficient landscape plan is required, the square footage of the surface area of a water feature will be included in estimated water use calculations, in compliance with Section 17.33.100 below;~~
 - d. ~~Water features use a recirculating water system and, when available, reclaimed water;~~
 - e. ~~Water features are maintained in a clean and non-contaminated condition;~~
 - f. ~~Water remains in motion and/or is aerated during hours of operation;~~
~~and~~

g. ~~The manner and extent to which artwork or water features replace landscaping shall be reviewed and approved by the Director or appropriate review authority.~~

10. ~~On site landscaped areas designed for compliance with either the Western El Dorado County or Lake Tahoe Basin Storm Water Management Plan requirements for storm water retention and bio filtration purposes can be used to satisfy landscaping requirements under this Chapter providing the minimum buffer, shade, and oak tree replacement requirements are met.~~

11. ~~The size of plant material shall be the following pot size or equivalent container, such as tree pot, slip, or bare root packaging, as certified by the preparer of the landscape plan:~~

- ~~_____ Trees.....5 gallon minimum~~
- ~~_____ Shrubs.....1 gallon minimum~~

12. ~~The use of landscape fabric shall be prohibited to allow the rejuvenation and self sufficiency of the underlying soil.~~

13. ~~A minimum two inch layer of mulch shall be applied on all exposed soil surfaces of planting areas except in turf areas, creeping or rooting groundcovers, or direct seeding applications where mulch is contraindicated. The mulching portion of the seed/mulch slurry in hydro seeded applications shall meet the mulching requirement. Stabilizing mulching products shall be used on slopes.~~

14. ~~Landscaping within the 100 year flood plain of the South Fork of the American River shall be consistent with Element 6.5.2.1 of the El Dorado County River Management Plan.~~

15. ~~For phased projects, or projects for which only a portion of a lot is proposed to be developed, landscaping may be deferred for areas surrounding the undeveloped phases or portions, providing temporary erosion and dust control measures are implemented as required by the County.~~

C. ~~Parking Lot Landscaping.~~

1. ~~Landscaping shall be provided in paved parking lots of five spaces or more and shall provide shade over 50 percent of all paved parking areas, as set forth below:~~

a. ~~Shade calculations shall assume the sun is directly overhead;~~

b. ~~Shade shall be calculated by using the expected diameter of the tree crown at 15 years.~~

- e. ~~The percentage of area required to be shaded shall be based on the total square footage of all aboveground and uncovered pavement.~~
- d. ~~Solar panel grids, canopies, and other structures that can be utilized as shade structures and meet the 50 percent shade requirements for the paved parking areas can be substituted for living tree material, providing they are architecturally compatible with the structure(s) on site and the minimum buffer requirements of Paragraph B.1 are met.~~
2. ~~In addition to the required landscape buffers, landscaping areas within a parking facility shall have a minimum width of five feet and a minimum area of 25 square feet, exclusive of any curbs.~~
3. ~~Wheel stops or similar devices shall be installed three feet from landscape areas, as measured from the far side of the wheel stop to the edge of curb, to prevent vehicle damage or encroachment onto landscape materials. In lieu of wheel stops, concrete curbing used to separate the landscape area from the parking lot may serve as the wheel stop provided that the planting area width, exclusive of curbing, is increased by a minimum of 2.5 feet for each side adjoining the vehicular encroachment. Plant material designed to grow no higher than six inches shall be planted within the increased planting area.~~
4. ~~Walkways and/or sidewalks shall be required to provide pedestrian circulation across landscaped areas where necessary to prevent pedestrian traffic from destroying plant material.~~

17.33.070 — Irrigation Standards

~~Landscape areas shall be provided with a permanent automatic irrigation system(s) coordinated to meet the needs of various planting areas/hydrozones and water efficiency in compliance with the manufacturers' recommendations. The irrigation system and its related components shall be planned and designed to allow for proper installation, management, and maintenance subject to the following:~~

- A. ~~An irrigation plan shall be submitted with the Landscape Plan application. The irrigation system shall be designed to prevent runoff, low head drainage, overspray, or other similar conditions where irrigation water flows onto non-targeted areas, such as adjacent property, nonirrigated areas, hardscape, roadways, or structures.~~
- B. ~~When reclaimed water is available within the region containing the project lot(s), or when a reclamation master plan indicating the availability of reclaimed water in the future has been adopted by either the local water district or the County, the applicant shall incorporate the use of reclaimed water into the project design subject to public health and safety regulations.~~
- C. ~~Domestic graywater systems for subsurface landscape irrigation can be utilized subject to the provisions of the Department of Water Resources California Graywater Standards, the Uniform Plumbing Code (UPC), and the building code.~~

~~D. — Temporary irrigation systems that will be utilized to establish native, drought tolerant landscaping or xeriscaping, or other alternative irrigation methods, shall be subject to the review and approval of the Director.~~

~~17.33.080 — Maintenance and Protection~~

~~All landscaping shall be maintained in accordance with the approved landscape plan, as set forth below:~~

- ~~A. — All plant materials shall be maintained in a healthy and attractive manner and kept free from weeds, debris, and undesirable materials for fire safety as well as aesthetic purposes. Plant materials showing damage from insects, disease, or lack of maintenance shall be replaced in accordance with the approved landscape plan.~~
- ~~B. — Plant materials shall not be allowed to become overgrown, so as to compromise the CVA (cross-visibility area), pedestrian or vehicular circulation, or public safety.~~
- ~~C. — All existing plant material to be retained on site shall be subject to the protection measures set forth in the Design and Improvement Standards Manual during grading and construction activities.~~
- ~~D. — The Director may cause an inspection of landscaping at any time following the installation of said landscaping to determine compliance with this Section. Any costs associated with said inspection or to insure compliance shall be paid by the property owner.~~
- ~~E. — If loss of landscaping occurs due to lack of water during a declared water shortage, or due to other mandatory water conservation measures, all plants shall be replaced within a reasonable time after the water shortage has ended.~~

~~17.33.090 — Non-conforming Landscaping~~

~~When a change in use occurs on a site that contains landscaping that is non-conforming to the standards of this Chapter, the following shall apply:~~

- ~~A. — When a proposed new use requires no expansion of the parking area, the Department shall verify that the existing landscaping is maintained consistent with the requirements of the site when the previous use was established. Replacement landscaping consistent with minimum plant material, plant diversity, and shade requirements in compliance with Section 17.33.050 may be required if the landscaping has not been properly maintained.~~
- ~~B. — Whenever additional parking is required due to an intensification of use or expansion of a structure that does not exceed the thresholds under Section 17.33.090, the landscaping for the entire site shall be consistent with minimum plant material, plant diversity, and shade requirements in compliance with Paragraphs 17.33.050.B.1, B.4, B.6, and C.1-3.~~

C. Whenever the structure(s) on a site are enlarged, modified, or redeveloped to the level of thresholds under Subsection 17.33.090.A below, the provisions of this Chapter shall apply to the entire site.

17.33.100 Water Efficient Landscape Plan ~~(Gov. Code 65591—65599)~~

A. ~~A Water Efficient Landscape Plan in accordance with the requirements contained in the site planning and design manual is required for the following:~~

- ~~1. New construction and rehabilitated landscapes requiring a permit with a landscape area equal to or greater than 2,500 square feet for industrial, research and development, commercial, civic, or utility uses, and developer installed landscaping in single and multi-unit residential development.~~
- ~~2. New construction landscapes that are homeowner provided and/or homeowner-hired in single and multi-unit residential projects, with a total landscape area equal to or greater than 5,000 square feet and only when a building or grading permit is required for said landscaping installation.~~
- ~~3. New and rehabilitated cemeteries limited to a Water Efficient Landscape Worksheet (Appendix A), landscape and irrigation maintenance schedule, irrigation audits or surveys, and irrigation water use analysis by the local water district.~~
- ~~4. Existing cemeteries and landscapes limited to irrigation audits or surveys and irrigation water use analysis by the local water district addressing water waste prevention.~~

B. ~~The following shall be exempt from this Section:~~

- ~~1. Registered local, state, or federal historical sites.~~
- ~~2. Ecological restoration projects where the site is intentionally altered to establish a defined, indigenous, historic ecosystem and that do not require a permanent irrigation system.~~
- ~~3. Mining reclamation projects that do not require a permanent irrigation system.~~
- ~~4. Plant collections, as part of public arboretums and botanical gardens.~~
- ~~5. Commercial agricultural operations.~~

17.33.110 Water Efficient Landscape Plan Requirements

In addition to the submittal requirements set forth in Section 17.33.040, additional information related to water use and efficient application shall be submitted as follows:

~~A. — Landscape Documentation Package. A Landscape Documentation Package, as provided in Subsection B, shall be submitted to the Department for review and approval prior to permit issuance. A copy of the approved Landscape Documentation Package shall be provided to the property owner or site manager along with any other information normally forwarded to the property owner or site manager as part of the permit process.~~

~~B. — Elements of the Landscape Documentation Package.~~

~~1. — Project Information:~~

~~a. — Applicant/owner names and contact information;~~

~~b. — Site address and Assessor's Parcel Number (APN);~~

~~c. — Total landscape area (in sq ft);~~

~~d. — Project type, such as new, rehabilitated, public, private, cemetery, homeowner-installed;~~

~~e. — Water type, such as potable, reclaimed, well; and~~

~~f. — Applicant signature and date with statement, "I agree to comply with the requirements of the water efficient landscape ordinance."~~

~~2. — Water Efficient Landscape Worksheet. A project applicant shall complete the Water Efficient Landscape Worksheet for the project, as follows:~~

~~a. — A hydrozone information table (Appendix A, Section A); and~~

~~b. — A water budget calculation (Appendix A, Section B). Water budget calculations shall adhere to the following requirements:~~

~~(1) — For the calculation of the Maximum Applied Water Allowance (MAWA) and Estimated Total Water Use (ETWU), a project applicant shall use the Reference Evapotranspiration (ET_o) value of 47.3 inches per year for El Dorado County (CIMIS Reference Evapotranspiration Zones Map, Department of Water Resources, 1999).~~

~~(2) — The plant factor used (Appendix A, Section B.2) shall be from the Water Use Classification of Landscape Species (WUCOLS). For purposes of this Ordinance, the plant factor shall range from 0 to 0.3 for low water use plants, from 0.4 to 0.6 for moderate water use plants, and from 0.7 to 1.0 for high water use plants.~~

~~(3) — All surface area of water features, as defined in Article 8, shall be included in the high water use hydrozone and temporarily irrigated areas shall be included in the low water use hydrozone.~~

~~(4) — All Special Landscape Areas (SLA), as defined in Section 17.33.030, shall be identified and included in calculating the MAWA. A statement shall be included with the landscape design plan designating recreational areas to be used for such purposes.~~

~~3. — Landscape Design Plan. For the efficient use of water, a landscape shall be carefully designed and planned for the intended function of the project. A landscape design plan~~

meeting the following requirements shall be submitted as part of the landscape documentation package:

a. ~~Plant Selection and Grouping.~~ Plant selection shall be in compliance with Section 17.33.040 (Landscape Standards) providing the recommended ETWU does not exceed the Maximum Applied Water Allowance and the plants meet the following specifications:

- (1) ~~Plants having similar water use shall be grouped together in distinct hydrozones with the exception of hydrozones with plants of mixed water use, in compliance with Subparagraph 4.d.(1) below.~~
- (2) ~~Plants shall be selected appropriately based upon their adaptability to the climatic, geologic, and topographical conditions of the site, as well as their horticultural attributes, such as size and invasiveness, in order to minimize damage to property or infrastructure.~~
- (3) ~~Fire-prone plant materials and highly flammable mulches shall be avoided.~~
- (4) ~~Soil amendments shall be incorporated according to recommendations of the soil management report and what is appropriate for the plants selected.~~

b. ~~Landscape Design Plan Requirements.~~ The landscape design plan shall be drawn on a base project or permit site plan sheet at a scale that accurately and clearly delineates, labels, and identifies, at a minimum:

- (1) ~~Square footage of the total landscaped area.~~
- (2) ~~Existing and proposed trees, shrubs, ground cover, turf, and other vegetation. Existing vegetation shall be clearly distinguished between what is to be retained and what is to be removed. Planting symbols shall be clearly drawn and vegetation shall be labeled by botanical name, common name, container size, spacing, and quantities of each group of plant material indicated;~~
- (3) ~~Each hydrozone by number, letter, or other method;~~
- (4) ~~Each hydrozone as low, moderate, high, or mixed water use for calculating the water budget;~~
- (5) ~~Where reclaimed water is used for plant irrigation or water features;~~
- (6) ~~Special landscape areas and their type;~~
- (7) ~~Type and surface area of water features;~~
- (8) ~~Location and installation details of any applicable stormwater best management practices (BMPs) used for on-site retention and infiltration of stormwater. Stormwater BMPs are not subject to water budget calculations.~~
- (9) ~~Hardscape areas and type (pervious and impervious);~~
- (10) ~~Tree staking, plant installation, soil preparation details to include amendment types and quantity, mulch types and application depth, and any other applicable planting and installation details.~~
- (11) ~~The following statement bearing the signature of a licensed landscape architect, licensed landscape contractor, or any other person authorized to design a landscape: "I have complied with the criteria of the ordinance and applied them for the efficient use of water in the landscape design plan".~~

4. ~~Irrigation Plan.~~ For the efficient use of water, an irrigation system shall meet all the requirements listed in this Section and the manufacturers' recommendations. The irrigation system and its related components shall be planned and designed to allow for proper installation, management, and maintenance.

a. — Irrigation Plan Requirements. An irrigation plan shall be drawn on project or permit site plan base sheets. It shall be separate from, but shall use the same format as the landscape design plan. The scale shall be the same as that used for the landscape design plan described in Subparagraph 3.b above, and shall contain:

- (1) — Location and size of separate water meter(s) for landscaping.
- (2) — Separate hydrozone areas designated by number, letter, or other designation.
- (3) — Location, type, and size of all components of the irrigation system, including controllers, main and lateral lines, valves, sprinkler heads, moisture sensing devices, rain switches, quick couplers, pressure regulators, and backflow prevention devices. Designation of the areas irrigated by each valve, and a number assigned to each valve. This valve number shall be used in the Hydrozone Information Table as part of the water efficient landscape worksheet. The table can also assist with the irrigation audit and programming the controller.
- (4) — Static water pressure at the point of connection to the public water supply.
- (5) — Flow rate (gallons per minute), application rate (inches per hour), and design operating pressure (pressure per square inch) for each station.
- (6) — Reclaimed water or domestic graywater irrigation systems, if applicable.
- (7) — Date and signature of a licensed landscape architect, certified irrigation designer, licensed landscape contractor, or any other person authorized to design an irrigation system after the following statement: “I have complied with the criteria of the ordinance and applied them accordingly for the efficient use of water in the irrigation design plan”.

b. — Design Requirements. The following design requirements shall be included in the irrigation system, as appropriate:

- (1) — Automatic irrigation controllers utilizing either evapotranspiration or soil moisture sensor data for scheduling in all irrigation systems.
- (2) — If the static pressure is above or below the required dynamic pressure of the irrigation system, pressure regulating devices such as inline pressure regulators, booster pumps, or other devices installed to meet the required dynamic pressure of the irrigation system within the manufacturer’s recommended pressure range for optimal performance.
- (3) — Sensors (rain, freeze, wind, etc.), either integral or auxiliary, that suspend or alter irrigation operation during unfavorable weather conditions customary for the climate area.
- (4) — Manual shut-off valves, such as a gate valve, ball valve, or butterfly valve, as close as possible to the point of connection of the water supply to minimize water loss in case of an emergency, such as a main line break, or for routine repair.
- (5) — Backflow prevention devices to protect the water supply from contamination by the irrigation system.
- (6) — Sprinkler heads and other emission devices having matched precipitation rates, unless otherwise directed by the manufacturer’s recommendations.
- (7) — Sprinkler spacing designed to achieve the highest possible distribution uniformity using the manufacturer’s recommendations.
- (8) — Swing joints or other protection components on all risers adjacent to high traffic areas that are subject to damage.
- (9) — Check valves or anti-drain valves.

c. — Design Standards. The irrigation system must be designed and installed to meet or exceed the irrigation efficiency criteria used in calculating the MAWA. The following design standards shall be included in the irrigation system, as appropriate:

(1) — Narrow or irregularly shaped areas less than eight feet in width in any direction, including turf, shall be irrigated with subsurface irrigation or a low volume irrigation system.

(2) — Overhead irrigation shall not be permitted within 24 inches of any non-permeable surface. Allowable irrigation within the setback from non-permeable surfaces may include drip, drip line, or other low flow non-spray technology. The setback area may be planted or unplanted. The surfacing of the setback may be mulch, gravel, or other porous material. These restrictions may be modified if:

(a) — The landscape area is adjacent to permeable surfacing and no runoff of water beyond the landscape area occurs;

(b) — The adjacent non-permeable surfaces are designed and constructed to drain entirely to landscape areas; or

(c) — The irrigation designer specifies an alternative design or technology, as part of the Water Efficient Landscape Plan, and clearly demonstrates strict adherence to irrigation system design criteria in Subsection 17.33.060.A. Prevention of overspray delivered beyond the target area and runoff must be confirmed during the irrigation audit.

(3) — Slopes greater than 25% shall not be irrigated with an irrigation system with a precipitation rate exceeding 0.75 inches per hour. This restriction may be modified if the landscape designer specifies an alternative design or technology, as part of the Water Efficient Landscape Plan, and clearly demonstrates no runoff or erosion will occur. Prevention of runoff and erosion must be confirmed during the irrigation audit.

(4) — Incorporation of relevant information from the soil management plan, such as soil type and infiltration rate.

(5) — Static water pressure, dynamic or operating pressure, and flow reading of the water supply measured at the point of connection. Pressure and flow reading measurements shall be conducted at the design stage. If the measurements are not available at the design stage, the measurements shall be conducted at installation.

(6) — Conformance to the hydrozones of the landscape design plan.

(7) — The use of low volume irrigation in mulched planting areas to maximize water infiltration into the root zone.

d. — Hydrozones.

(1) — Each valve shall irrigate a hydrozone with similar site, slope, sun exposure, soil conditions, and plant materials with similar water use subject to the following exceptions:

(a) — Individual hydrozones that mix plants of moderate and low water use, or moderate and high water use, may be allowed if:

i. — Plant factor calculation is based on the proportions of the respective plant water uses and their plant factor; or

ii. — The plant factor of the higher water using plant is used for calculations.

(b) — Individual hydrozones that mix high and low water use plants shall not be permitted.

(2) — Sprinkler heads and other emission devices shall be selected based on what is appropriate for the plant type within that hydrozone.

(3) — Where feasible, trees shall be placed on separate valves from shrubs, groundcovers, and turf.

e. — Irrigation Scheduling. For implementation of the irrigation schedule, total annual applied water shall be less than or equal to MAWA. Irrigation schedules shall meet the following criteria:

- (1) — Irrigation scheduling shall be regulated by automatic irrigation controllers using current reference evapotranspiration data (e.g., CIMIS) or soil moisture sensor data.
- (2) — Overhead irrigation shall be scheduled between 8 p.m. and 10 a.m. unless weather conditions prevent it. If allowable hours of irrigation differ from the requirements of the local water district, the stricter of the two shall apply. Operation of the irrigation system outside the normal watering window is allowed for auditing and system maintenance.
- (3) — Parameters used to set the automatic controller shall be developed and submitted for the plant establishment period, the established landscape, and any temporarily irrigated areas.
- (4) — Each irrigation schedule shall consider for each station all of the following that apply:
 - (a) — Irrigation interval (days between irrigation);
 - (b) — Irrigation run times (hours or minutes per irrigation event to avoid runoff);
 - (c) — Number of cycle starts required for each irrigation event to avoid runoff;
 - (d) — Amount of applied water scheduled to be applied on a monthly basis;
 - (e) — Application rate setting;
 - (f) — Root depth setting;
 - (g) — Plant type setting;
 - (h) — Soil type;
 - (i) — Slope factor setting;
 - (j) — Shade factor setting; and
 - (k) — Irrigation uniformity or efficiency setting.

f. — Landscape and Irrigation Maintenance Schedule. Landscapes shall be maintained to ensure water use efficiency. A regular maintenance schedule shall be submitted with the Certificate of Completion to include, but not be limited to:

- (1) — Routine inspection; adjustment and repair of the irrigation system and its components; aerating and dethatching turf areas; replenishing mulch; fertilizing, pruning, and weeding in all landscape areas; and removing obstruction to emission devices.
- (2) — Repair of all irrigation equipment with the originally installed components or their equivalents.

g. — Irrigation Audit Report or Survey. For new construction and rehabilitated landscape projects under Section 17.33.090.A, the applicant shall submit the following:

- (1) — An irrigation audit report, conducted by a certified landscape irrigation auditor, to the local water district for their review and approval. The irrigation audit report may include, but not be limited to irrigation schedule, inspection report, system tune-up schedule, system test with distribution or emission uniformity, and method of reporting overspray or run-off that causes overland flow.
- (2) — Where an irrigation survey is allowed in lieu of an audit report in compliance with this Section, or as determined by the local water district, it shall include, but not be limited to inspection, system test, and written recommendations to improve performance of the irrigation system.
- (3) — A filed copy of the approved irrigation audit report or survey, or other form of documentation indicating approval by the local water district, to the Department with the Certificate of Completion.

5. — Grading Plan. For the efficient use of water, grading of a project site shall be designed to minimize soil erosion, runoff, and water waste. As part of a grading permit, the grading plan shall be separate from, but at the same scale as the landscape design plan and shall indicate

finished configurations and elevations of the landscape area and stormwater retention improvements, if applicable.

— The grading plan shall contain the following statement: “I have complied with the criteria of the ordinance and applied them accordingly for the efficient use of water in the grading design plan” and shall bear the signature of a licensed professional as authorized by law.

6. — Soil Management Report. In order to reduce runoff and encourage healthy plant growth, a soil management report shall be completed by the project applicant prior to grading, as follows:

a. — Soil samples shall be submitted to a laboratory for analysis and recommendations in accordance with laboratory protocol, including protocols regarding adequate sampling depth for the intended plants.

b. — The project applicant shall submit the soil management report to the Department as part of the Landscape Documentation Package.

c. — The project applicant shall make the soil management report available to the professionals preparing the landscape design plans and irrigation plans to allow them to make any necessary adjustments to the design plans in a timely manner.

d. — The project applicant shall submit documentation verifying implementation of the soil management report recommendations to the Department with the Certificate of Completion.

7. — Certificate of Completion. The signer of the landscape design plan, the signer of the irrigation plan, or the licensed landscape contractor shall conduct a final field observation and provide a Certificate of Completion to the Department (see Appendix A, Section C), as follows:

a. — The Certificate shall specifically indicate that the landscape project has been installed in compliance with the approved Landscape Documentation Package. Where there have been significant changes made in the field during construction, these “as-built” drawings shall be included with the certification.

b. — The project applicant shall submit the signed Certificate to the Department for review.

c. — The Department shall approve or deny the Certificate. If the Certificate is denied, the Department shall provide information to the project applicant regarding reapplication, appeal, or other assistance.

d. — The project applicant shall ensure that copies of the approved Certificate are submitted to the local water district and property owner or his or her designee.

C. — Provisions for Existing Landscapes.

1. ~~All existing landscaped areas, one acre or more in size, to which a local water district provides water, including golf courses, green belts, common areas, multi-unit residential development, schools, businesses, parks, cemeteries, and publicly owned landscapes, shall have a landscape irrigation audit at least once every five years. An audit shall not be required if the local water district determines, based on an irrigation water use analysis of meter readings and billing data, that the existing landscape area does not exceed the MAWA for the project site.~~

2. ~~The audit shall be in accordance with the California Landscape Water Management Program, as described in the Landscape Irrigation Auditor Handbook version 5.5 (Dept. of Water Resources: Water Conservation Office), or with criteria established through a local water district program, whichever is stricter.~~

CHAPTER 17.34 – OUTDOOR LIGHTING

Sections:

- 17.34.010 ~~Purpose and Intent~~Content
- 17.34.020 ~~Definitions~~Outdoor Lighting Standards
- 17.34.030 ~~Lighting Plans Required~~Exemptions
- 17.34.040 ~~Outdoor Lighting Limits~~
- 17.34.050 ~~Outdoor Lighting Standards~~
- 17.34.060 ~~Exemptions~~
- 17.34.0740 Effect on Existing Outdoor Lighting


17.34.010– Purpose and IntentContent

This Chapter complies with General Plan Objective 2.8.1, providing standards consistent with prudent safety practices for the elimination of excess nighttime light and glare. Outdoor lighting criteria for lighting practices and systems are contained in the site planning and design manual.

17.34.020– Outdoor Lighting Standards

All outdoor lighting shall be located, adequately shielded, and directed such that no direct light falls outside the property line, or into the public right-of-way as illustrated in Figure 17.34.020.1 (Light Source Not Directly Visible Outside Property Perimeter).

Figure 17.34.020.1 - Light Source Not Directly Visible Outside Property Perimeter

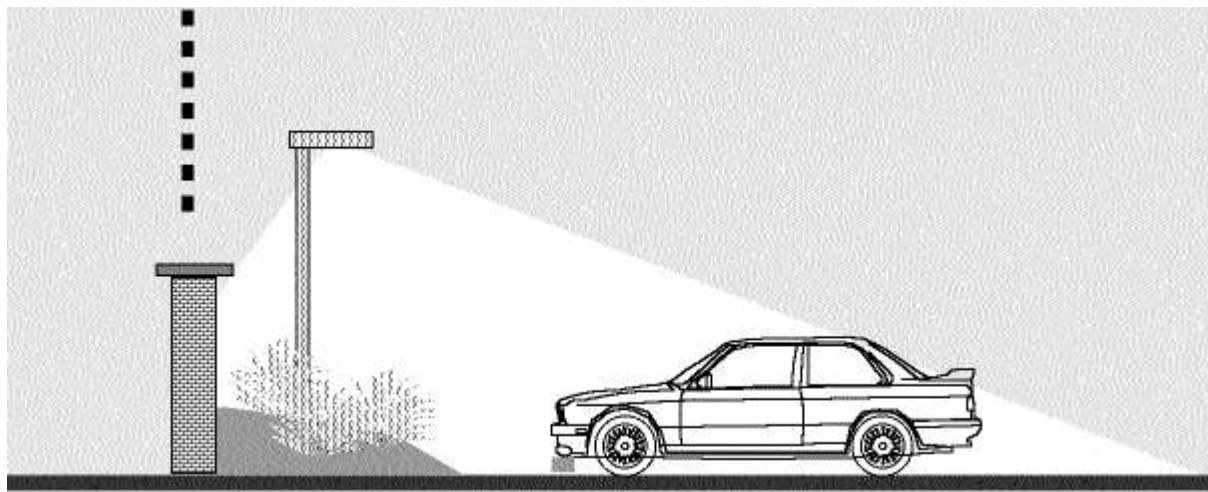

Property Line

Source: Dark Sky Society

~~The purpose of this Chapter is to minimize high intensity lighting and glare by establishing standards for lighting practices and systems that will balance lighting levels, minimize light trespass, and conserve energy in concert with state and federal requirements, while maintaining night time safety, utility, and security consistent with prudent safety practices.~~

17.34.020 — Definitions

For the purposes of this Chapter, the following terms shall be defined as follows:

~~“Design Professional” means a licensed electrical engineer or contractor, or a licensed architect.~~

~~“Direct Light” means light emitted directly from the lamp, off the reflector or reflector diffuser, or through the refractor or diffuser lens of a luminaire.~~


~~“Fixture” means the assembly that holds the lamp (bulb) in a lighting system, which can include all or some of the following elements designed to give light output control: housing, mounting bracket or pole socket, lamp holder, ballast, reflector (mirror), and/or refractor (lens).~~

~~“Flood light” or “Spot light” means any light fixture or lamp that incorporates a reflector or a refractor to concentrate and intensify the light output into a directed beam.~~

~~“Footcandle (horizontal or vertical)” means the amount of light striking a vertical or a horizontal plane measured as one lumen per square foot.~~

~~“Full cutoff (fco)” means the light distribution of a luminaire where zero units of light intensity occurs at an angle of 90 degrees and greater above nadir, which is the vertical point directly below the luminaire when it is pointed down (0 degrees), and does not exceed 10 percent of lumen output at a vertical angle of 80 degrees above nadir, as demonstrated in Figure 17.34.020.A, below. This applies to all lateral angles around the installed luminaire to include any tilt or other non-level mounting condition. [Illuminating Engineering Society of North America (IESNA) Standards]. Full cut off does not have the same meaning as and cannot be used interchangeably with the terms ‘cut-off’, ‘full shielding’ or ‘fully shielded’.~~

Figure 17.34.020.A

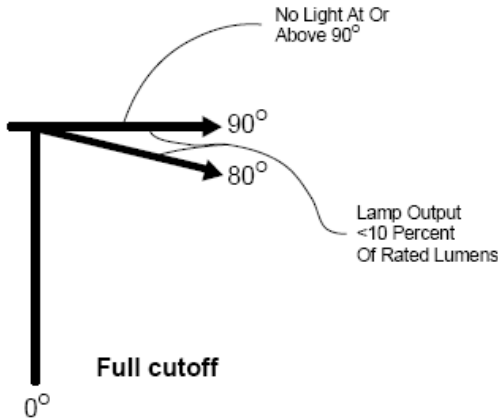

“Glare” means discomfort experienced by an observer with a direct line of sight to a light source, often resulting in visual impairment.

“Indirect Light” means light resulting from direct light being reflected or scattered off of other surfaces.

“Inventory of lighting” means a complete list of all exterior lamps to be utilized on site, including illuminated signage. The inventory shall include the lamp type, number and wattage of each type, lighting plan key ID letter or number, initial lumen output rating per lamp or, in the case of luminous tube lighting, the length of the lamp measured in feet. The total project area expressed in net acreage or percentage thereof shall be required. Maximum allowable and project related lumens per acre will be calculated based on this information.

“Lamp” means the component of a luminaire that produces the actual light, commonly referred to as the ‘bulb’. Lamp types consist of light emitting diodes (LED), high intensity discharge (HID) such as metal halide, mercury vapor, and high or low pressure sodium, and incandescent, fluorescent, and luminous tubes containing neon or argon. Certain lamps are more useful for specific uses, such as incandescent, fluorescent and metal halide where color rendition is important, or high and low pressure sodium for security lighting in such areas with little or no nighttime activity.

“Lamp efficacy or efficiency” means the total luminance emitted by a lamp divided by the power input, expressed in lumens per watt. As an example, the efficiency of various lamps can be compared in the Table 17.34.020.1, as follows:

Table 17.34.020.1

| Lamp Type |
|-----------|
|-----------|

| - | Incandescent | Fluorescent | Metal Halide | High-Pressure Sodium | Low-Pressure Sodium |
|--------------------------|---------------------|--------------------|---------------------|-----------------------------|----------------------------|
| Wattage | 25-150 | 18-95 | 50-400 | 50-400 | 18-180 |
| Output (Lumens) | 210-2700 | 1000-7500 | 1900-30000 | 3600-46000 | 1800-33000 |
| Efficiency (lumens/watt) | 8-18 | 55-79 | 38-75 | 72-115 | 100-183 |

~~“Light source” means the bulb and lens, diffuser, or reflective enclosure.~~

~~“Light trespass” means direct or indirect light projected onto a property from a luminaire not located on that property.~~

~~“Lumen” means the measure of brightness of the light exiting a bulb, provided by the manufacturer. For the purposes of this Chapter, the lumen output values shall be the initial lumen output ratings of a lamp shown on the manufacturer’s specification sheet.~~


~~“Luminaire” means the complete lighting system to include the light source and the fixture. Luminaire types consist of bollard or post top for walkways and ground lighting, pole mounted for roadways and parking lots, soffit and wall systems for structures, and floodlights for building facades, signage, landscaping, and sports fields.~~

~~“Net acreage” means, in addition to the definition in Article 8, lots containing those uses that are exempt from the lumens per acre caps under Paragraph 17.35.040.A.4 shall also exclude from the net acreage calculations the area devoted to the specific use, such as the vehicle sales lot, the fuel pump canopy, or the outdoor performance area.~~

~~“Outdoor Lighting” means the night time illumination of an outside area or object, including signage, by any man-made device that produces light by any means.~~

~~“Semi-cutoff or non-cutoff” means a light fixture which does not cut off all upward transmission of light pursuant to IESNA Standards as demonstrated in Figure 17.34.020.B, below:~~

Figure 17.34.020.B Delete Graphic

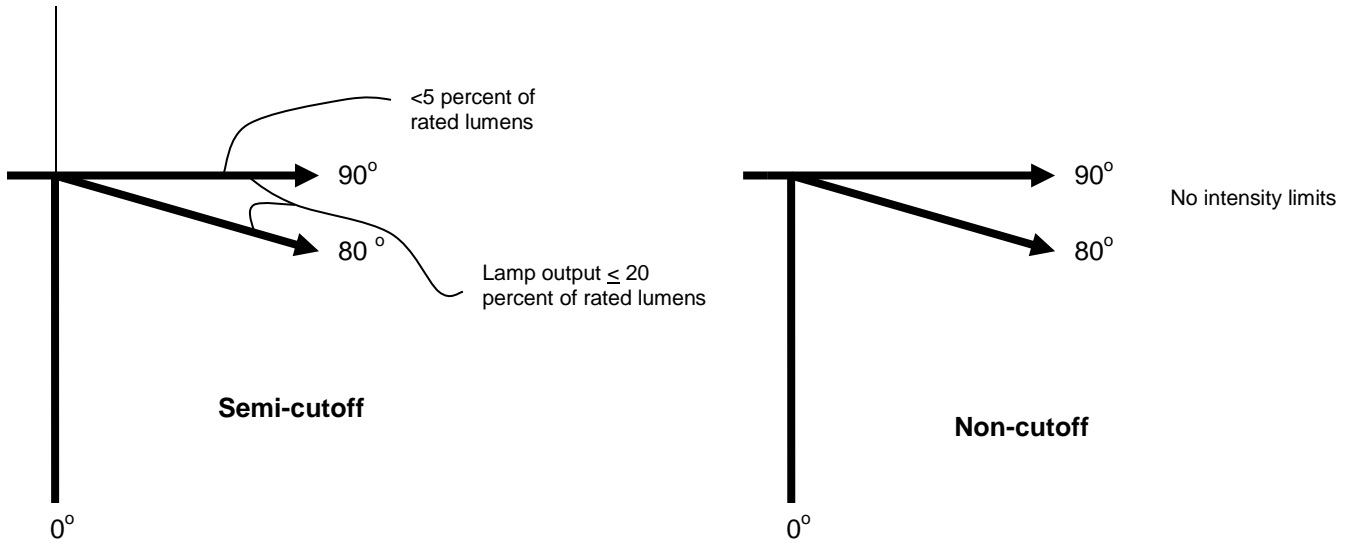

“Temporary outdoor lighting” means the specific illumination of an outside area or object, to include signage, by any man-made device that produces light by any means for a period of 45 days or less, with at least 180 days passing before being used again.

17.34.030 — Lighting Plans Required

All public and private outdoor lighting installed in the County shall be in conformance with the requirements established by this Chapter, subject to the following:

- A. Any applicant of a commercial, industrial, multi-unit residential, civic, or utility project that proposes to install outdoor lighting shall submit plans for such lighting, to be reviewed and approved by the Director as a part of an Administrative Permit.
- B. If the project requires a Design Review, Conditional/Minor Use Permit, or Development Plan Permit, said lighting plan shall be included as a part of that application, and shall be subject to approval by the review authority.
- C. Lighting plan shall be subject to the submittal requirements provided in the application form prepared by the Department and shall include, at a minimum, lighting specifications, a site plan, photometric plan, and Lighting Inventory (Appendix D).
- D. The Lighting Inventory shall be completed and certified by the design professional prior to building permit issuance (Section B.1 and 2 of Appendix D) and by the licensed contractor prior to final occupancy (Section C of Appendix D).

17.34.040 — Outdoor Lighting Limits

Lumens per acre limits shall be applied toward outdoor lighting based on the specified zone and its location within a General Plan-designated Community Region, Rural Center, or Rural Region, subject to Table 17.34.040.1 below:

Table 17.34.040.1

| Zones | LUMENS / ACRE | | |
|-------------------------|------------------------|--------------------|--------------------|
| | Community Regions (CR) | Rural Centers (RC) | Rural Regions (RR) |
| C, CPO, CG, I, R&D, RFH | 100,000 | 50,000 | 25,000 |
| RM, NS, RFL, OS, TC | 50,000 | 25,000 | |

A. In mixed-use zones, lighting limits shall be based on the sum of each percentage of the site dedicated for commercial and residential uses. For example, a lot in a Community Region developed as mixed use, with 60 percent commercial and 40 percent multi-unit residential, would be calculated, as follows:

$$\begin{array}{r}
 \text{100,000} \times 0.60 = 60,000 \text{ lumens/acre} \\
 \text{(Commercial use)} \\
 \text{50,000} \times 0.40 = 20,000 \text{ lumens/acre} \\
 \text{(Multi-unit residential use)} \\
 \hline
 \mathbf{80,000}
 \end{array}$$

lumens/acre Total Site Limit

B. The following uses are exempt from the lighting limits of this section:

1. Automobile sales/rental lots for the outdoor vehicle display area, only;
2. Canopied fuel station dispensing areas; and
3. Performance areas in compliance with Section 17.34.050.C.

Full cutoff fixture design, light trespass requirements, and certification from Building Services regarding energy efficiency standards shall still apply to these areas. The remaining net acreage shall be subject to applicable lumens per acre limits.

17.34.050 Outdoor Lighting Standards

A. The following standards shall apply to all development in commercial, industrial, research and development, and multi-unit residential zones, as well as civic and utility lighting in all zones:

1. Pole mounted fixtures shall be limited to a maximum height of 20 feet, as measured from the highest point of the luminaire to the finished grade directly below it.
2. Top mounted luminaires to illuminate parapet signs shall be limited to a maximum height of 25 feet, as measured at the highest point of the fixture to the

~~finished grade directly below it. Illuminated signs shall also comply with Chapter 17.37 (Signs).~~

- ~~3. Roof mounted luminaires are prohibited.~~
- ~~4. Security lighting shall be activated by motion sensors and remain in the "on" mode for a maximum of 10 minutes.~~
- ~~5. Light fixtures mounted under gas station or convenience store pump area canopies shall meet full cut off requirements. Light fixtures shall not be mounted on the roof or sides (fascias) of the canopy and the fascias of the canopy shall not be illuminated in compliance with Chapter 17.36 (Signs).~~
- ~~6. Lots within the Historic District (DH) Combining Zone may be exempt from full cut off requirements in order to maintain a certain visual character in keeping with the historic period.~~
- ~~7. Outdoor display lighting, such as vehicle sales and rental lots, and building material sales display areas, shall be turned down to 25 percent or less of the existing illumination level or switched to security lighting, in compliance with Paragraph 4 above, by the following curfew times or within 30 minutes after the close of business, whichever comes later:~~

Table 17.34.050.1

| Lighting Zone | | |
|------------------|--------------|--------------|
| Community Region | Rural Center | Rural Region |
| 11:00 pm | 10:00 pm | 9:00 pm |

~~Under eave or canopy soffit lighting on buildings will be allowed to remain on until dawn in Community Regions and Rural Centers.~~

- ~~8. Search lights, laser source, or similar high intensity lighting shall not be permitted except in emergencies by police, fire, or other emergency personnel.~~
- ~~9. Mercury vapor lamps shall be prohibited.~~
- ~~B. Residential lighting, including single and multi-unit development, shall conform to the following standards:~~
 - ~~1. Lighting installation shall be limited to those areas adjacent to buildings, walkways, driveways, or activity areas (swimming pools, spas, outdoor dining areas, barns, and other similar uses) in close proximity to the residence or activity area.~~
 - ~~2. An outdoor luminaire shall be full cutoff if rated greater than 1,000 initial lumens, which is equivalent to one 60 watt incandescent lamp.~~

3. ~~Security lighting shall be in compliance with Paragraph A.4, above.~~

4. ~~Mercury vapor lamps shall be prohibited.~~

C. ~~**Outdoor Sports and Performance Facilities** have unique lighting needs. Illumination levels vary, depending on the nature of the event. The regulations in this Subsection are intended to allow adequate lighting for such events while minimizing light pollution or sky glow, reducing glare and unwanted light trespass onto surrounding streets and properties, and maintaining energy efficiency. Outdoor sports and performance facility lighting shall conform to the following standards:~~

1. ~~A lighting plan, prepared by a design professional, shall be submitted with the proposed lighting installation. The lighting plan shall be based on a dual system separating the performance area, such as the playing field, track, stage, or arena from the remainder area of the site, as defined in Paragraph C.2 below. The design plan shall include a discussion of the lighting requirements for the performance area and how those requirements will be met based on the following:~~

a. ~~The performance area shall not be subject to pole height or lumens per acre limitations;~~

b. ~~Floodlights in the performance area should not be aimed above 62 degrees from the vertical plane, and should use internal louvers and external shields to focus light on the performance area in order to eliminate light trespass in compliance with IESNA recommendations, as amended from time to time.~~

2. ~~The remainder area, including but not limited to grandstand, public seating, concession areas, pedestrian walkways, and parking lots shall be subject to lighting plan requirements under 17.34.030.~~

3. ~~The main lighting of the performance area shall be turned off no later than 30 minutes after the end of the event.~~

4. ~~The remainder of the site shall be subject to the lighting curfews under Table 17.34.050.1.~~

17.34.0630- Exemptions

The following lighting shall be exempt from the provisions of this Section:

A. Airport lighting that is required for the safe and efficient movement of aircraft during flight, take off, landing, and taxiing. All other outdoor lighting at airport facilities shall comply with the provisions of this Chapter.

B. Lighting used by law enforcement or other emergency personnel.

C. Lighting used by public agencies for nighttime public works or road construction projects.

CD. Lighting used for the illumination of the United States flag subject to the requirements for nighttime illumination of the *United States Flag Code*.

DE. Temporary outdoor lighting that is designed to eliminate glare and minimize light pollution as much as possible in compliance with ~~the general intent of this Chapter~~. To qualify for this exemption a completed application form for an Administrative or Temporary Use Permit and a site plan shall be provided demonstrating location of proposed fixtures, manufacturer's specification sheets including lamp type, wattage, initial lumen output and shielding, intended use of lighting, and other information as the Director may require.

EF. ~~Low wattage s~~Seasonal or holiday type lighting.

17.34.0740 — Effect on Existing Outdoor Lighting

LuminairesLighting lawfully in place prior to the effective date of this Chapter may remain in use except as provided below:

A. Any nonconforming luminairelighting that is replaced, re-aimed, or relocated must meet the standards of this Chapter.

~~B. Intensification or expansion of an existing nonconforming use, in compliance with Section 17.61.040.B (Nonconforming Uses), shall require the site to fully comply with the standards of this Chapter.~~

CB. Nonconforming luminairelighting that direct light toward streets in such a manner as to cause potentially hazardous glare to motorists or cyclists shall be either replaced or re-directed so as to meet full-cutoff requirements, ~~within three days of initial notification by the County~~

7

CHAPTER 17.35 – PARKING AND LOADING

Sections:

- 17.35.010 ~~Purpose and Intent~~Content
- 17.35.020 Definitions
- 17.35.030 ~~Parking Plan Required~~
- 17.35.0430 Off-street Parking and Loading Requirements
- 17.35.050 ~~Special Parking Requirements and Adjustments~~
- 17.35.060 ~~Material and Passenger Loading/Unloading Areas~~
- 17.35.070 ~~Recreational Vehicle Parking~~
- 17.35.080 ~~Parking Lot Design Standards~~
- 17.35.090 ~~Parking Lot Construction and Maintenance Standards~~
- 17.35.1040 ~~Non-conforming Uses~~

17.35.010 ~~Purpose and Intent~~Content

~~The purpose of t~~This Chapter contains standards for off-street parking requirements for residential and non-residential uses. Additional standards for the design for the required parking for new development is found in the site planning and design manual.
~~is to ensure the provision and maintenance of safe, adequate, and well designed off street parking facilities in conjunction with a use or development in order to protect the public health, safety, and welfare. The intent is to reduce road congestion and traffic hazards, to promote storm water quality and management practices, to provide safe and convenient access to businesses, public services, and places of public assembly, and to promote an attractive environment through design and landscape standards for parking areas.~~

17.35.020- Definitions

“**Active use area (AUA)**” shall mean all developed areas within a building except for storage areas, restrooms, and employee lunchroom/cafeteria(s).

“**Gross floor area (GFA)**”. See Article 8

“**Outside use area (OUA)**” shall mean the total square footage of an area dedicated to the performance of a specific activity, enclosed by fences, gates, walls, buildings, landscaping or other features which define the perimeter of the outdoor area where uses and activities are or may be conducted, including, but not limited to recreational use, retail sales, rentals, and restaurant seating. The OUA excludes the area of walkways, promenades, restrooms, landscaping and parking areas and a nursery dedicated to the growing of plant material or areas related product and equipment storage.

“**Transportation Demand Management Plan (TDM)**” shall mean a program designed by an employer to reduce the amount of traffic generated by either new nonresidential development or the expansion of existing nonresidential development, by using a combination of services

and incentives to maximize the potential for alternative transportation usage and encourage efficient utilization of existing transportation facilities.

17.35.030 — Parking Plan Required

- A. ~~A parking plan showing all off street parking spaces, parking aisles, and access to parking areas shall be required, as follows:~~
1. ~~At the time of submittal of an application for a building permit for construction of any building or structure that requires parking under this Chapter;~~
 2. ~~For an expansion or addition to increase the floor area, lot coverage, or seating capacity of an existing use or structure that requires additional parking under this Chapter;~~
 3. ~~When a more intensive land use is established requiring more parking than a previous use; or~~
 4. ~~At the time of submittal of any discretionary application.~~
- B. ~~The parking improvements shown on the approved plan shall be constructed prior to occupancy of any structure, or the commencement of any approved use. For phased developments, parking constructed may be provided by phase.~~
- C. ~~Minor revisions to an approved parking plan may be approved by the Director. If the parking plan was approved as a part of a discretionary permit, the Director shall refer revisions to the review authority if the revisions have the potential to raise new issues that were not reviewed or are substantial enough to warrant further review at public hearing.~~
- D. ~~A parking plan shall not be required for single family residential developments where all lots will have a minimum of two off street parking spaces.~~

17.35.0430 Off-street Parking and Loading Requirements

- A. Off-street parking shall be provided in accordance with Table 17.35.04030.1 below, unless otherwise provided in this Chapter. Where a parking requirement results in a fraction of a space, the number of parking spaces required shall be rounded to the nearest whole number.
- B. Uses Not Listed.** Where the parking requirement for a use is not specifically listed in the parking schedule, the parking requirement for that use shall be determined by the Director based on the most similar use or activity for which parking requirements are established.
- C. Combined Uses.** In situations where a combination of uses or activities are developed on a single site, parking shall be calculated for each separate use according to the parking schedule, except as otherwise provided under Paragraph 17.35.050.D (Shared

Parking) in standards for shared parking, or for certain accessory uses that are subject to a 50 percent reduction in parking requirements, as noted in the parking schedule.

Table 17.35.0430.1 Schedule of Off-Street Vehicle Parking Requirements

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|---|--|
| <u>RESIDENTIAL</u> | |
| <u>Single dwelling unit, detached</u> | <u>2 per unit</u> |
| <u>Duplex, triplex</u> | <u>2 per unit</u> |
| <u>Multi-unit (apartments, townhouses, and condominiums):</u> <u>Studio/1 bedroom</u> <u>2 or more bedrooms</u> | <u>1.5 per unit;</u> <u>2 per unit (minimum 1 covered); plus</u> <u>Guest parking shall be provided for all multi-unit development in the amount of 1 per 4 dwelling units.¹</u> <u>Guest spaces shall be marked “Reserved for guests” or “Visitor parking”.</u> |
| <u>Mixed Use:</u> <u>Studio/1 bedroom</u> <u>2 or more bedrooms</u> <u>Commercial</u> | <u>See Section 17.40.180.C.6</u> <u>1 per unit.</u> <u>1.5 per unit; plus</u> <u>Guest parking shall be provided at 1 space per 4 dwelling units.¹</u> <u>Guest spaces shall be marked “Reserved for Residential Guests”.</u> <u>A minimum of 75 percent of the normally required commercial parking as otherwise required in this article if residential spaces are made available to the commercial customers, subject to approval of the review authority.</u> <u>¹The approving authority may reduce or eliminate the required number of guest spaces if</u> <u>(a) Adequate street parking is available, or</u> <u>(b) The site is within 500 feet of a transit/bus stop.</u> <u>²For commercial portion of mixed use, only.</u> <u>³Or as determined by the review authority based on type of commercial uses.</u> |
| <u>Rooming houses, fraternity/sorority housing, or clubs w/sleeping facilities</u> | <u>1 per bedroom; plus</u> <u>1 per 8 beds.</u> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|--|---|
| <p><u>Accessory dwelling units:</u> <u>Secondary dwelling,</u> <u>Temporary mobile home</u></p> | <p><u>1 per bedroom, up to 2 maximum.</u> <u>May be in tandem with spaces required for primary residence.</u></p> |
| <p><u>Guest house</u></p> | <p><u>No additional spaces from that required for the primary residence.</u></p> |
| <p><u>Caretaker, Employee housing</u></p> | <p><u>1 per unit.</u></p> |
| <p><u>Mobile home park</u></p> | <p><u>2 per mobile home space, may be in tandem for each space; plus</u> <u>1 guest space for every 5 units.</u></p> |
| <p><u>COMMERCIAL</u></p> | |
| <p><u>Animal services:</u> <u>Kennel</u></p> | <p><u>1; plus</u> <u>1 per 5 kennel spaces.</u></p> |
| <p><u>Veterinary clinic</u></p> | <p><u>1 per 250 square feet (sf.) of active use area (AUA) exclusive of kennel boarding area.</u></p> |
| <p><u>Automobile:</u> <u>Sales and rental (For customer and employee use)</u></p> | <p><u>1 per 400 sf. of AUA; plus</u> <u>2 per service bay; plus</u> <u>1 per 3,000 sf. of outdoor sales lot.</u></p> |
| <p><u>Repair and service, vehicle fuel sales</u></p> | <p><u>3 per service bay; plus</u> <u>1 per 400 sf. of office/retail AUA.</u></p> |
| <p><u>Car wash</u></p> | <p><u>2 per washing stall;</u> <u>Drive-through stalls may utilize stacking areas with a length of 24 feet (ft.) as parking spaces.</u></p> |
| <p><u>Bank, financial institution</u></p> | <p><u>1 per 250 sf. of AUA; plus 1 per ATM.</u></p> |
| <p><u>Barber or beauty shop</u></p> | <p><u>2 per chair or station.</u></p> |
| <p><u>Bar, drinking establishment</u></p> | <p><u>1 per 3 seats or equivalent occupancy; plus</u> <u>1 per 100 sf. of outdoor use area (OUA); plus</u> <u>1 per 2 employees on maximum shift.</u></p> |
| <p><u>Building supply and lumberyard;</u></p> | <p><u>1 per 500 sf. of gross floor area (GFA); plus</u> <u>1 per 1,000 sf. of OUA.</u></p> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|---|---|
| <u>Equipment rental</u> | <u>1 per 500 sf of GFA; plus 1 per 2,000 sf. of OUA.</u> |
| <u>Funeral home, mortuary</u> | <u>1 per 4 seats or equivalent occupancy; plus 1 for each vehicle maintained on the premises.</u> |
| <u>Laundry facilities:</u> <u>Dry Cleaner / Laundry Service (small scale w/o delivery or linen supply services)</u> | <u>1 per 500 sf. of GFA; plus 1 per check stand.</u> |
| <u>Laundromats (self-service)</u> | <u>1 per 2 washers.</u> |
| <u>Lodging:</u> <u>Bed and Breakfast</u> | <u>1 per guest room; plus required residential parking. (See 17.40.170090 for additional requirements)</u> |
| <u>Hotel, motel</u> | <u>1.2 per guest room; plus 50% of the parking requirements for internal, accessory uses where conference facilities, meeting rooms, restaurants, and similar uses are provided as a part of the hotel / motel complex.</u> |
| <u>Medical services:</u> <u>Hospital</u> | <u>1 per bed based on design capacity. If more than 50 employees on the maximum work shift, 10 percent of required parking shall be designated for carpool/vanpool parking.</u> |
| <u>Long term care facility</u> | <u>1 per 4 beds based on design capacity.</u> |
| <u>Nursery, retail</u> | <u>See “Building Supply and lumberyard”</u> |
| <u>Office:</u> <u>Medical, dental</u> | <u>1 per 200 sf. of AUA.</u> |
| <u>General</u> | <u>1 per 250 sf. of AUA.</u> |
| <u>Restaurant and Brewpub:</u> <u>Full service</u> | <u>1 per 300 sf. of dining room area; plus 1 per 2 employees; plus 1 RV space for every 20 parking spaces. When outdoor seating is provided, the first 300 sf. of OUA exempt from parking requirements.</u> |
| <u>With drive-through</u> | <u>1 per 300 sf. of GFA; plus 1 RV space for every 20 parking spaces. Stacking lane shall be in compliance with Section 17.35.050.H provided in compliance with the site planning and design manual.</u> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|--|--|
| <u>Retail sales and service:</u> <u>Food and beverage</u> | <u>1 per 200 sf. of AUA; plus</u> <u>1 per check stand; plus</u> <u>1 per 600 sf. of storage area.</u> |
| <u>Furniture and appliances</u> | <u>1 per 500 sf. of AUA.</u> |
| <u>General, indoor</u> | <u>1 per 300 sf. of AUA; plus</u> <u>1 per 600 sf. of storage area.</u> |
| <u>Shopping center:</u> <u>Neighborhood (less than 15K sf.)</u> | <u>1 per 300 sf. of GFA</u> |
| <u>Community (15K to 400K sf.)</u> | <u>1 per 400 sf. of GFA</u> |
| <u>Regional (>400K sf.)</u> | <u>1 per 500 sf. of GFA</u> |
| <u>CIVIC / CULTURAL</u> | |
| <u>Church</u> | <u>1 per 4 seats; plus</u> <u>1 per Sunday school classroom.</u> |
| <u>Community assembly, including live theater, banquet hall, sports assembly, or other auditoriums and meeting halls</u> | <u>1 per 3 seats, or 1 per 50 sf. of spectator area if seats not fixed.</u> |
| <u>Library</u> | <u>1 per 2 employees for average day shift staffing; plus</u> <u>1 per 400 sf. of GFA.</u> |
| <u>Schools:</u> <u>Child daycare center, preschool, nursery school</u> | <u>1 per 8 children; plus</u> <u>1 space per 2 employees.</u> |
| <u>Elementary, middle school</u> | <u>3 per classroom; plus</u> <u>1 per 250 sf. of office/administration area; plus</u> <u>1 per 100 sf of auditorium.</u> |
| <u>High school</u> | <u>10th grade and below:</u> <u>3 per classroom; plus</u> <u>1 per 250 sf. of office / administration area; plus</u> <u>1 space per 100 sf. of auditorium; plus</u> <u>11th grade and above:</u> <u>Additional 1 space per 3 students 16 years and older.</u> |
| <u>College</u> | <u>8 per classroom, plus 1 per 35 sf. of auditorium area; or</u> <u>As determined by the review authority.</u> |
| <u>Specialized education, trade school</u> | <u>1 per 75 sf. of GFA; plus</u> <u>1 per staff member.</u> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|---|---|
| <u>INDUSTRIAL</u> | |
| <u>Industrial, general and specialized</u> | <u>1 per 500 sf. of indoor AUA; plus 1 per 1,000 sf. of indoor storage area; plus 1 per 2,000 sf. of OUA; plus 1 per 5,000 sf. of outdoor storage area.</u> |
| <u>Light manufacturing</u> | <u>1 per 400 sf. of AUA.</u> |
| <u>Research and development</u> | <u>1 per 250 sf. of AUA; plus 1 per 1,000 sf. of indoor storage area; plus 1 per 2,000 sf. of OUA; plus 1 per 5,000 sf. of outdoor storage area.</u> |
| <u>Resource extraction</u> | <u>No improved parking required providing sufficient usable area is available to accommodate all employee and visitor vehicles on-site.</u> |
| <u>Storage:</u> | |
| <u>Self-storage: w/outdoor access to units by vehicle drive aisles</u> | <u>2 spaces.</u> |
| <u>w/indoor access to units or no vehicle drive aisle within 20 feet of units</u> | <u>1 space; plus 1 per each 30 units, or fraction thereof.</u> |
| <u>Wholesale Distribution</u> | <u>1 per 1,000 sf. for first 10,000 sf. of AUA; plus 1 per 3,000 sf. of AUA thereafter.</u> |
| <u>RECREATIONAL</u> | |
| <u>Amusement center, arcade</u> | <u>1 per 200 sf. GFA.</u> |
| <u>Billiard hall</u> | <u>2 per table.</u> |
| <u>Bowling Alley</u> | <u>4 per lane; plus 50 percent of requirements for each indoor accessory use.</u> |
| <u>Campground, RV park</u> | <u>1 per campsite; plus 1 per every 3 day users as determined by maximum occupancy under a Conditional Use Permit.</u> |
| <u>Dance Studio</u> | <u>1 per 200 sf. of AUA, not including waiting room.</u> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|---|--|
| <u>Golf course, regulation</u> | <u>4 per hole; plus</u> <u>1 per driving range tee; plus</u> <u>50 percent of requirements for each accessory use.</u> |
| <u>Golf course, miniature</u> | <u>3 per hole; plus</u> <u>50 percent of requirements for each accessory use.</u> |
| <u>Health/Fitness club</u> | <u>1 per 300 sf. of AUA; plus</u> <u>50% of requirements for each accessory use.</u> <u>Pools and tennis/racquetball courts calculated separately.</u> |
| <u>Marina</u> | <u>1 per 2 boat slips.</u> <u>At least 20% of the spaces shall measure 9ft x 35ft to accommodate vehicles with trailers.</u> |
| <u>Movie theater (indoor)</u> | <u>1 per 3 fixed seats or equivalent occupancy.</u> |
| <u>Park</u> | <u>1 per 1,000 sf. of OUA.</u> |
| <u>Picnic area</u> | <u>1 per table.</u> |
| <u>Riding stable</u> | <u>1 per 4 stalls.</u> <u>At least 20% of the spaces shall measure 9ft x 35ft to accommodate vehicles with horse trailers.</u> |
| <u>River put-in and take-out</u> | <u>1 per 3 day users; plus</u> <u>1 bus parking space (10ft x 30ft) per 56 day users.</u> |
| <u>Skateboard Park</u> | <u>1 per 1,000 sf. of OUA.</u> |
| <u>Skating/ice rink</u> | <u>1 per 300 sf. of AUA.</u> |
| <u>Ski area</u> | <u>1 per 2.5 users based on total ski lift area capacity.</u> |
| <u>Snow Play Area</u> | <u>1 per 1,000 sf. of OUA.</u> |
| <u>Special Events: Outdoor</u> | <u>1 per 2.5 people in attendance.</u> |
| <u>Swimming pool</u> <u>(Public or membership)</u> | <u>1 per 200 sf. of pool area; plus</u> <u>1 per 500 sf. of deck area.</u> |
| <u>Tennis courts/Racquetball</u> | <u>2 spaces per court; plus</u> <u>50% of requirements for each accessory use (i.e. Retail sales area).</u> |
| <u>Trail Head Parking and Staging Area</u> | <u>As determined by the appropriate review authority.</u> |

| <u>USE TYPE</u> | <u>PARKING SPACE REQUIREMENTS</u> |
|---|---|
| <u>AGRICULTURAL</u> | |
| <u>Christmas tree farms (U-cut), U-pick produce farms (fruit, pumpkin patch, etc.)</u> | <u>5 per one acre of crop.</u> |
| <u>Farm equipment and supply sales; and Nurseries, wholesale</u> | <u>1 per 500 sf. of GFA; plus 1 per 1,000 sf. of OUA.</u> |
| <u>Packing shed</u> | <u>1 per 1,500 sf. of GFA.</u> |
| <u>Produce, seasonal sales</u> | <u>1 per 300 sf. of OUA, with a minimum of 3 spaces.</u> |
| <u>Ranch marketing</u> (see also commercial and recreational uses, above): | |
| <u>Bake shop</u> | <u>1 per 250 sf. of GFA;</u> |
| <u>Craft sales area</u> | <u>3 per each concession; plus 1 per 200 sf. of AUA.</u> |
| <u>Winery, brewery</u> (see also commercial and recreational uses, above): | |
| <u>Production, laboratory, storage</u> | <u>1 per 2,000 sf. of AUA; plus 1 per 5,000 sf. of storage.</u> |
| <u>Tasting Room</u> <u>Bus/Limo parking (10ft x30ft)-----</u> | <u>1 per 300 sf of AUA; plus 1 per 2.5 people attending marketing events.</u> <u>1 space for first 20,000 sf. of winery/tasting room AUA; plus 1 space for each additional 20,000 sf. or fraction thereof.</u> |
| <p><u>The approving authority may reduce or eliminate the required number of guest spaces if:</u></p> <p><u>(a) Adequate street parking is available, or</u></p> <p><u>(b) The site is within 500 feet of a transit/bus stop.</u></p> | |
| <p><u>TABLE NOTES:</u></p> <ul style="list-style-type: none"> • <u>See special requirements and adjustments for Parking Lot Turnover and Loading Bay Intensity as identified in the site planning and design manual.</u> • <u>Standards contained in this table may be modified by the Special Parking Requirements and Adjustments contained in the site planning and design manual.</u> • <u>A parking plan shall not be required for single family residential developments where all lots will have a minimum of two off-street parking spaces.</u> | |

| USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|--|---|---|--|
| RESIDENTIAL | | | |
| Single dwelling unit, detached | 2 per unit, not in tandem. | N/A | N/A |
| Duplex, triplex | 2 per unit, not in tandem. | N/A | N/A |
| Multi-unit (apartments, townhouses, and condominiums): — Studio/1 bedroom — 2 or more bedrooms | 1.5 per unit; 2 per unit (minimum 1 covered); plus Guest parking shall be provided for all multi-unit development in the amount of 1 per 4 dwelling units. ¹ Guest spaces shall be marked “Reserved for guests” or “Visitor parking”. | N/A | N/A |
| Mixed Use: — Studio/1 bedroom — 2 or more bedrooms Commercial | 1 per unit. 1.5 per unit; plus Guest parking shall be provided at 1 space per 4 dwelling units. ¹ Guest spaces shall be marked “Reserved for Residential Guests”. A minimum of 75 percent of the normally required commercial parking as otherwise required in this article if residential spaces are made available to the commercial customers, subject to approval of the review authority. | High ² | Low ³ |
| | <p>NOTES:</p> <p>¹The approving authority may reduce or eliminate the required number of guest spaces if: — (a) Adequate street parking is available, or — (b) The site is within 500 feet of a transit/bus stop. ²For commercial portion of mixed use, only. ³Or as determined by the review authority based on type of commercial uses.</p> | | |
| Rooming houses, fraternity/sorority housing, or clubs w/sleeping facilities | 1 per bedroom; plus 1 per 8 beds. | Low | N/A |

| | USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|--|--|---|---|--|
| | Accessory dwelling units: — Secondary dwelling, — Temporary mobile home | 1 per bedroom, up to 2 maximum. May be in tandem with spaces required for primary residence. | N/A | N/A |
| | — Guest house | No additional spaces from that required for the primary residence. | N/A | N/A |
| | Caretaker, Employee housing | 1 per unit. | N/A | N/A |
| | Mobile home park | 2 per mobile home space, may be in tandem for each space; plus — 1 guest space for every 5 units. | N/A | N/A |
| | COMMERCIAL | | | |
| | Animal services: — Kennel | 1; plus 1 per 5 kennel spaces. | Low | Low |
| | — Veterinary clinic | 1 per 250 square feet (sf.) of active use area (AUA) exclusive of kennel boarding area. | Medium | Low |
| | Automobile: — Sales and rental (For customer and employee use) | 1 per 400 sf. of AUA; plus 2 per service bay; plus 1 per 3,000 sf. of outdoor sales lot. | Medium | Low |
| | Repair and service, vehicle fuel sales | 3 per service bay; plus 1 per 400 sf. of office/retail AUA. | Medium | Medium |
| | Car wash | 2 per washing stall; Drive-through stalls may utilize stacking areas with a length of 24 feet (ft.) as parking spaces. | High | N/A |
| | Bank, financial institution | 1 per 250 sf. of AUA; plus 1 per ATM. | High | Low |
| | Barber or beauty shop | 2 per chair or station. | High | N/A |

| USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|--|---|---|--|
| Bar, drinking establishment | 1 per 3 seats or equivalent occupancy; plus 1 per 100 sf. of outdoor use area (OUA); plus 1 per 2 employees on maximum shift. | High | Medium |
| Building supply and lumberyard; | 1 per 500 sf. of gross floor area (GFA); plus 1 per 1,000 sf. of OUA. | High | High |
| Equipment rental | 1 per 500 sf of GFA; plus 1 per 2,000 sf. of OUA. | Medium | Low |
| Funeral home, mortuary | 1 per 4 seats or equivalent occupancy; plus 1 for each vehicle maintained on the premises. | Medium | Low |
| Laundry facilities: Dry Cleaner / Laundry Service (small scale w/o delivery or linen supply services) | 1 per 500 sf. of GFA; plus 1 per check stand. | High | Low |
| Laundromats (self service) | 1 per 2 washers. | High | N/A |
| Lodging: Bed and Breakfast | 1 per guest room; plus required residential parking. (See 17.40.090 for additional requirements) | Low | N/A |
| Hotel, motel | 1.2 per guest room; plus 50% of the parking requirements for internal, accessory uses where conference facilities, meeting rooms, restaurants, and similar uses are provided as a part of the hotel / motel complex. | Medium High w/restaurant | Low Medium w/restaurant |
| Medical services: Hospital | 1 per bed based on design capacity. If more than 50 employees on the maximum work shift, 10 percent of required parking shall be designated for carpool/vanpool parking. | High | Medium |
| Long term care facility | 1 per 4 beds based on design capacity. | Low | Low |
| Nursery, retail | See "Building Supply and lumberyard" | High | Low |

| | USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|--|---|---|---|--|
| | Office: Medical, dental | 1 per 200 sf. of AUA. | High | Low |
| | General | 1 per 250 sf. of AUA. | Medium | Low |
| | Restaurant and Brewpub: Full service | 1 per 300 sf. of dining room area; plus 1 per 2 employees; plus 1 RV space for every 20 parking spaces. When outdoor seating is provided, the first 300 sf. of OUA exempt from parking requirements. | High | Medium |
| | With drive through | 1 per 300 sf. of GFA; plus 1 RV space for every 20 parking spaces. Stacking lane shall be in compliance with Section 17.35.050.H. | High | Medium |
| | Retail sales and service: Food and beverage | 1 per 200 sf. of AUA; plus 1 per check stand; plus 1 per 600 sf. of storage area. | High | High |
| | Furniture and appliances | 1 per 500 sf. of AUA. | Medium | Medium |
| | General, indoor | 1 per 300 sf. of AUA; plus 1 per 600 sf. of storage area. | High | Medium |
| | Shopping center: Neighborhood (less than 15K sf.) | 1 per 300 sf. of GFA | High | Medium |
| | Community (15K to 400K sf.) | 1 per 400 sf. of GFA | High | Medium |
| | Regional (>400K sf.) | 1 per 500 sf. of GFA | Medium | High |
| | CIVIC/CULTURAL | | | |
| | Church | 1 per 4 seats; plus 1 per Sunday school classroom. | High | N/A |
| | Community assembly, including live theater, banquet hall, sports assembly, or other auditoriums and meeting halls | 1 per 3 seats, or 1 per 50 sf. of spectator area if seats not fixed. | High | Low |

| USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) | |
|--|--|---|---|--------|
| Library | 1 per 2 employees for average day shift staffing; plus 1 per 400 sf. of GFA. | High | | Low |
| Schools: Child daycare center, preschool, nursery school | 1 per 8 children; plus 1 space per 2 employees. | Medium | | Low |
| Elementary, middle school | 3 per classroom; plus 1 per 250 sf. of office/administration area; plus 1 per 100 sf of auditorium. | Medium | | Low |
| High school | 10 th -grade and below: 3 per classroom; plus 1 per 250 sf. of office / administration area; plus 1 space per 100 sf. of auditorium; plus 11 th -grade and above: Additional 1 space per 3 students 16 years and older. | Medium | | Low |
| College | 8 per classroom, plus 1 per 35 sf. of auditorium area; or As determined by the review authority. | High | | Low |
| Specialized education, trade school | 1 per 75 sf. of GFA; plus 1 per staff member. | High | | Low |
| INDUSTRIAL | | | | |
| Industrial, general and specialized | 1 per 500 sf. of indoor AUA; plus 1 per 1,000 sf. of indoor storage area; plus 1 per 2,000 sf. of OUA; plus 1 per 5,000 sf. of outdoor storage area. | Low | | High |
| Light manufacturing | 1 per 400 sf. of AUA. | Low | | High |
| Research and development | 1 per 250 sf. of AUA; plus 1 per 1,000 sf. of indoor storage area; plus 1 per 2,000 sf. of OUA; plus 1 per 5,000 sf. of outdoor storage area. | Low | | Medium |

| | USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|--|--|--|---|---|
| | Resource extraction | No improved parking required providing sufficient usable area is available to accommodate all employee and visitor vehicles on site. | Low | Low |
| | Storage: Self storage: w/outdoor access to units by vehicle drive aisles | 2 spaces. | Low | N/A |
| | w/indoor access to units or no vehicle drive aisle within 20 feet of units | 1 space; plus 1 per each 30 units, or fraction thereof. | | Low |
| | Wholesale Distribution | 1 per 1,000 sf. for first 10,000 sf. of AUA; plus 1 per 3,000 sf. of AUA thereafter. | Low | High |
| | RECREATIONAL | | | |
| | Amusement center, arcade | 1 per 200 sf. GFA. | Medium | Medium |
| | Billiard hall | 2 per table. | High | N/A |
| | Bowling Alley | 4 per lane; plus 50 percent of requirements for each indoor accessory use. | Medium | Low |
| | Campground, RV park | 1 per campsite; plus 1 per every 3 day users as determined by maximum occupancy under a Conditional Use Permit. | Low | N/A |
| | Dance Studio | 1 per 200 sf. of AUA, not including waiting room. | High | N/A |
| | Golf course, regulation | 4 per hole; plus 1 per driving range tee; plus 50 percent of requirements for each accessory use. | Medium | Low |
| | Golf course, miniature | 3 per hole; plus 50 percent of requirements for each accessory use. | High | N/A |

| USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) | |
|--------------------------------------|--|---|--|-----|
| Health/Fitness club | 1 per 300 sf. of AUA; plus 50% of requirements for each accessory use. Pools and tennis/racquetball courts calculated separately. | High | | Low |
| Marina | 1 per 2 boat slips. At least 20% of the spaces shall measure 9ft x 35ft to accommodate vehicles with trailers. | Medium | | N/A |
| Movie theater (indoor) | 1 per 3 fixed seats or equivalent occupancy. | High | | Low |
| Park | 1 per 1,000 sf. of OUA. | High | | N/A |
| Picnic area | 1 per table. | Medium | | N/A |
| Riding stable | 1 per 4 stalls. At least 20% of the spaces shall measure 9ft x 35ft to accommodate vehicles with horse trailers. | Medium | | N/A |
| River put in and take out | 1 per 3 day users; plus 1 bus parking space (10ft x 30ft) per 56 day users. | Low | | N/A |
| Skateboard Park | 1 per 1,000 sf. of OUA. | Medium | | N/A |
| Skating/ice rink | 1 per 300 sf. of AUA. | Medium | | N/A |
| Ski area | 1 per 2.5 users based on total ski lift area capacity. | Low | | N/A |
| Snow Play Area | 1 per 1,000 sf. of OUA. | Medium | | N/A |
| Special Events: Outdoor | 1 per 2.5 people in attendance. | Medium | | N/A |
| Swimming pool (Public or membership) | 1 per 200 sf. of pool area; plus 1 per 500 sf. of deck area. | High | | N/A |
| Tennis courts/Racquetball | 2 spaces per court; plus 50% of requirements for each accessory use (i.e. Retail sales area). | High | | N/A |
| Trail Head Parking and Staging Area | As determined on a case by case basis at the time of development by the appropriate review authority. | | | N/A |

| USE TYPE | PARKING SPACE REQUIREMENTS | PARKING LOT TURNOVER (See 17.35.050.A.3.d) | LOADING BAY INTENSITY (See 17.35.060.A) |
|---|---|---|--|
| AGRICULTURAL | | | |
| Christmas tree farms (U cut), U-pick produce farms (fruit, pumpkin patch, etc.) | 5 per one acre of crop. | See Produce Sales (17.40.240.C.2.e) | N/A |
| Farm equipment and supply sales; and Nurseries, wholesale | 1 per 500 sf. of GFA; plus 1 per 1,000 sf. of OUA. | Low | Low |
| Packing shed | 1 per 1,500 sf. of GFA. | Low | Medium |
| Produce, seasonal sales | 1 per 300 sf. of OUA, with a minimum of 3 spaces. | See Produce Sales (17.40.240.C.2.e) | N/A |
| Ranch marketing (see also commercial and recreational uses, above): Bake shop | 1 per 250 sf. of GFA; | Low See Ranch Marketing (17.40.260.J.1) | N/A |
| Craft sales area | 3 per each concession; plus 1 per 200 sf. of AUA. | | |
| Winery, brewery (see also commercial and recreational uses, above): Production, laboratory, storage | 1 per 2,000 sf. of AUA; plus 1 per 5,000 sf. of storage. | Low | Low |
| Tasting Room Bus/Limo parking (10ft x 30ft)..... | 1 per 300 sf of AUA; plus 1 per 2.5 people attending marketing events. 1 space for first 20,000 sf. of winery/tasting room AUA; plus 1 space for each additional 20,000 sf. or fraction thereof. | See Winery Ordinance (17.40.400.G.4) | N/A |

¹The approving authority may reduce or eliminate the required number of guest spaces if:
 _____ (a) Adequate street parking is available, or
 _____ (b) The site is within 500 feet of a transit/bus stop.

TABLE NOTES:
 See special requirements and adjustments for Parking Lot Turnover and Loading Bay Intensity as identified in the site planning and design manual.
 Standards contained in this table may be modified by the Special Parking Requirements and Adjustments contained in the site planning and design manual.

- ~~**B. Uses Not Listed.** Where the parking requirement for a use is not specifically listed in the parking schedule, the parking requirement for that use shall be determined by the Director based on the most similar use or activity for which parking requirements are established.~~
- ~~**C. Combined Uses.** In situations where a combination of uses or activities are developed on a single site, parking shall be calculated for each separate use according to the parking schedule, except as otherwise provided under Paragraph 17.35.050.D (Shared Parking) or for certain accessory uses that are subject to a 50 percent reduction in parking requirements, as noted in the parking schedule.~~

~~17.35.050 Special Parking Requirements and Adjustments~~

~~The following special requirements and adjustments may apply to the parking standards set forth in Section 17.35.040:~~

- ~~**A. Increases and Decreases in Requirements.** The required number of parking spaces may be increased or decreased by the Director or review authority, as part of a discretionary permit, as follows:~~
- ~~1. The number of parking spaces required by this Chapter may be increased when it is determined that the proposed use would have a parking demand in excess of the requirements of this Chapter.~~
 - ~~2. The number of parking spaces required for commercial and industrial uses may be decreased from the requirements of this Chapter where the review authority finds all of the following:~~
 - ~~a. The intent of the parking ordinance is preserved;~~
 - ~~b. The parking provided is sufficient to serve the use for which it is intended; and~~
 - ~~c. The modification will not be detrimental to the public health, safety, or welfare.~~
 - ~~3. In considering requests for an increase or decrease in the number of parking spaces, the review authority shall consider:~~
 - ~~a. Size and type of use or activity;~~
 - ~~b. Composition and number of tenants;~~
 - ~~c. Peak traffic and parking loads;~~
 - ~~d. Rate of turnover based on the following criteria, as applied in Table 17.35.040.1:~~

- (1) ~~High intensity areas are those having rapid turnover of less than two hours;~~
- (2) ~~Medium intensity areas are those where vehicles are parked from two to four hours;~~
- (3) ~~Low intensity areas have minimum turnover and few repeat users, such as long term and employee parking lots.~~

- e. ~~Availability of public transportation including carpools or employer-provided transportation.~~
- f. ~~Payment of in lieu fees authorized by the County Transit Authority for public transportation facilities, if available, or other options that support mass transportation alternatives.~~
- g. ~~The extent and effectiveness of a proposed TDM program including its monitoring plan.~~

B. ~~Reduction Methods.~~ ~~The following reductions in required parking can be applied separately or in concert with each other, providing findings under Paragraph A.2 above can be made.~~

1. ~~Reduction for On-street Parking.~~ ~~Where on-street parking is available on public streets fronting the subject property, the required off-street parking may be reduced by one space for each available on-street space adjoining the property. Determination of availability of on-street parking shall be made by the review authority after consultation with the Department of Transportation and the local fire district.~~

2. ~~Reduction for Rear-lot Parking.~~ ~~The required off-street parking for commercial and civic uses located in a community region or rural center may be reduced by 10 percent when the project locates the parking area behind the structure(s) so that the parking area is not visible from the road frontage, sidewalks or other pedestrian accessways are available, and a transit stop is within 300 feet of the site.~~

3. ~~Shared Parking.~~ ~~Shared parking shall be permitted as follows:~~

- a. ~~Where two or more nonresidential uses on a single site or adjacent sites are developed, a parking analysis shall be required demonstrating parking demand based on distinct and differing hours of use and peak traffic periods. Table 17.35.050.1 below shall be the default method of calculation, however, variations may be allowed subject to Director review and approval.~~

Table 17.35.050.1 ~~Calculating Shared Parking by Use Types (in percents)~~

| Use Type | Weekday | | Weekend | | Nighttime |
|----------|---------|--|---------|--|-----------|
| | | | | | |
| | | | | | |

| | Daytime 8 am – 6 pm | Evening 6:01 pm – 12am | Daytime 8 am – 6 pm | Evening 6:01 pm – 12am | 12:01am – 7:59am |
|------------------------------|---------------------------|------------------------------|---------------------------|------------------------------|---------------------|
| Office/Industrial | 100% | 10% | 10% | 5% | 5% |
| Retail/Service | 60 | 90 | 100 | 70 | 5 |
| Lodging | 75 | 100 | 75 | 100 | 75 |
| Restaurant | 50 | 100 | 100 | 100 | 10 |
| Recreation/Entertain ment | 40 | 100 | 80 | 100 | 10 |
| Churches/Assembly | 40 | 80 | 100 | 100 | 5 |
| Schools | 100 | 75 | 40 | 40 | 5 |

b. Shared parking shall be calculated as follows:

- (1) Parking shall be determined for each use as though it were a separate use, based on Table 17.35.040.1;
- (2) Each amount of required parking shall be multiplied by the corresponding percentage for each time period;
- (3) The parking requirement shall be totaled for each column; and
- (4) The column with the highest value shall be the total parking space requirement.

Example: Calculating Shared Parking Requirement

For a development of office, retail, and restaurant uses that require the following number of spaces for each separate use:

Office _____ 50

Retail _____ 75

Restaurant _____ 60

185 Total required spaces

_____ Under shared parking requirements using Table 17.35.050.1: _____

| Use Type / Space Requirements | Weekday | | Weekend | | Nighttime 12:01am – |
|-------------------------------------|------------------------|----------------------|------------------------|----------------------|------------------------|
| | Daytime 8 am – 6 pm | Evening 6:01 pm – | Daytime 8 am – 6 pm | Evening 6:01 pm – | |
| | | | | | |

| | | 12am | | 12am | 7:59am |
|-----------------|---------------------|---------------------|---------------------|---------------------|-------------------|
| Office / 50 | (50 x 100% =) 50 | (50 x 10% =) 5 | (50 x 10% =) 5 | (50 x 5% =) 3 | (50 x 5% =) 3 |
| Retail / 75 | (75 x 60% =) 45 | (75 x 90% =) 68 | (75 x 100% =) 75 | (75 x 70% =) 53 | (75 x 5% =) 4 |
| Restaurant / 60 | (60 x 50% =) 30 | (60 x 100% =) 60 | (60 x 100% =) 60 | (60 x 100% =) 60 | (60 x 10% =) 6 |
| Total | 125 | 133 | 140 | 116 | 13 |

The “weekend daytime” is the highest use period and the hypothetical mixed use project would require 140 parking spaces, thereby reducing the parking requirement by 45 spaces.

- e. ~~The following restrictions shall apply to shared parking provisions:~~
 - (1) ~~Reserved parking spaces shall be prohibited.~~
 - (2) ~~Where shared parking occurs on adjoining lots, a maintenance agreement, in a form acceptable to the County. Said agreement shall provide for common maintenance of the parking area and shall state that any change in occupancy shall be subject to proof that sufficient parking is available.~~

~~4. Off Site Parking. Required parking for commercial or industrial uses may be located off site when all of the following requirements are met:~~

- a. ~~Off site parking is located on a site where parking is otherwise allowed and is located within 500 feet of the site which it is intended to serve.~~
- b. ~~Parking requirements shall be met for both on site and off site uses either in total or as allowed by any of the reduction methods under this Subsection.~~
- c. ~~There shall be no hazardous traffic safety conditions for pedestrians utilizing an off site parking facility.~~
- d. ~~An off site parking easement is granted ensuring the continued availability of the off site parking facilities for the life of the use that it is intended to serve, in compliance with Chapter 17.65 (Covenant of Easement).~~

- ~~C. — **Handicap Parking.** Parking for the physically handicapped shall be provided as required in the building code, in compliance with the Americans with Disabilities Act (ADA).~~
- ~~D. — **Compact Car Spaces.** Where 10 or more parking spaces are required for commercial, industrial, recreational, or civic uses, compact spaces may be incorporated for up to ten percent of the required spaces. Multi-unit residential developments containing ten or more units may incorporate compact spaces for up to 20 percent of the required visitor parking. All compact parking spaces shall be clearly marked by surface paint or signage reserving each parking space for compact car use, only. Compact spaces shall be evenly distributed throughout the parking lot.~~
- ~~E. — **Carpool/Vanpool.** Voluntary installation of carpool/vanpool parking may be allowed in return for a reduction in total parking requirements as part of a Transportation Demand Management Plan approved by the review authority.~~
- ~~F. — **Motorcycle Parking.** Parking areas accommodating 100 cars or more shall designate five percent of their required parking space for motorcycle use, rounded to the nearest whole number. General space requirements shall measure four feet wide by eight feet long per motorcycle, with adequate maneuvering space around the motorcycle. Two such spaces shall count as one car space.~~
- ~~G. — **Bicycle Parking.** Bicycle racks shall be designed to enable a bicycle to be locked to the rack and shall be installed in a manner that allows adequate access to the bicycle. General space allowances shall measure two feet wide by six feet long per bicycle, with a five-foot maneuvering space behind the bicycle. Surfacing shall be consistent with adjacent sidewalk or parking areas. Bicycle parking shall be required for the following development:~~
- ~~1. — **Office and Retail Commercial.** One bicycle space per every five required vehicle parking spaces up to the first 25 vehicle spaces. An additional bicycle space is required for every ten additional vehicle spaces or portion thereof. The maximum number of bicycle spaces required is 20, unless more are deemed necessary by the Director for major employment and commercial facilities.~~
 - ~~2. — **Community Services – Minor and Public Recreation Facilities.** Thirty percent of the required number of vehicle spaces, to a maximum of 25 bicycle spaces, unless more are deemed necessary by the Director.~~
 - ~~3. — **Elementary, Middle and High Schools.** One bicycle space per student at 25 percent of peak enrollment.~~
- ~~H. — **Drive-through Facilities.** Sites containing these facilities shall be in compliance with the following circulation and traffic control standards:~~
- ~~1. — A drive through facility shall be located at the rear or side of a commercial structure and not within any front setback area.~~

- ~~2. Ingress to and egress from a drive through facility shall be prohibited from driveway(s) directly facing a residential zone.~~
 - ~~3. A drive through facility, including stacking areas for vehicles awaiting service, shall be a minimum of 50 feet from the nearest property line of any residentially zoned lot.~~
 - ~~4. Stacking lane(s) shall be physically separated from other traffic circulation on the site by concrete or asphalt curbing. The stacking lane(s) shall accommodate a minimum of four cars per drive through window in addition to the car receiving service. The lanes shall be a minimum width of ten feet.~~
 - ~~5. Signage shall be provided to indicate the entrance, exit, and one-way path of drive through lanes in compliance with Chapter 17.37 (Signs).~~
 - ~~6. Stacking areas shall not block access to any parking area or space required of a business. Lane striping to separate drive through traffic from parking areas shall be provided from the nearest point of site access, as feasible, to the stacking lane(s).~~
 - ~~7. Where a facility exceeds the standards of Paragraphs 1 through 6 above, and is not located within a development that is subject to a discretionary permit, such as a Conditional Use, Design Review, or Development Plan Permit, a Conditional Use Permit shall be required.~~
 - ~~8. When a drive through facility requires a Conditional Use Permit or is within a development that is subject to a discretionary permit, the review authority may impose a greater setback than is required under Paragraph 3 above, when it is determined necessary to mitigate impacts from noise, air pollution, lights, or other land use conflicts. The review authority may deny any application for a drive through facility if it finds that the facility will add to the cumulative air quality impacts for a specified pollutant and the County is found to be in non-attainment status of either federal or state air quality standards for that pollutant.~~
- ~~**I. Historic Structures.** The following exemptions and reductions in parking standards shall apply to all historic structures, as designated by the County:~~
- ~~1. When a change or increase in intensity of use occurs in a historic structure no additional parking spaces shall be required.~~
 - ~~2. When expansions or additions to an historic structure increase its square footage by more than 25 percent, additional parking shall be required. The revised parking requirement shall be calculated on the resultant total square footage of the structure, whether such total increase occurs at one time or in successive stages, such as with a phased project.~~

~~**17.35.060 Material and Passenger Loading/Unloading Areas**~~

~~**A. Materials.** All uses which require the receipt or distribution of materials or merchandise by vehicle shall provide off street loading spaces in the amount specified under Table 17.35.060.1, based on the projected demand intensity for the use as provided by the applicant, subject to approval by the review authority:~~

Table 17.35.060.1 — Loading Bay Requirements

| Use Area (in square feet) | NUMBER PER LOADING BAY DEMAND | | |
|-------------------------------|-------------------------------|--------|------|
| | High | Medium | Low |
| Less than 10,000 | 1 | 0 | 0 |
| 10,000 to 30,000 | 2 | 1 | 0 |
| 30,001 to 60,000 | 3 | 2 | 1 |
| 60,001 to 100,000 | 4 | 3 | 2 |
| 100,001 to 150,000 | 5 | 4 | 3 |
| Each ——— additional 50,000 | 1 | 0.5 | 0.25 |

1. ~~Area(s) provided for passenger loading and unloading required under Subsection B below, may be utilized for material loading/unloading at the discretion of the review authority based on the type of use and material, expected demand for loading/unloading the material, time of material delivery, and other relevant factors.~~
2. ~~Industrial sites shall be self contained and capable of handling all truck loading, maneuvering, and docking on site. The use of public roads for staging and/or maneuvering is prohibited.~~
3. ~~The review authority may modify the loading zone requirements in special circumstances based on the specific nature of the use or combination of uses, the design characteristics of the project and site dimensions, the impacts to surrounding properties, and public safety.~~

B. ~~Passengers.~~ ~~Vehicle turn out lanes for passenger loading and unloading shall be provided outside of the normal circulation lane for the following uses:~~

1. ~~Apartments/condominiums containing 50 units or more.~~
2. ~~Retail sales and service uses containing 30,000 square feet or more of building area.~~
3. ~~Hotels/motels containing 50 units or more.~~
4. ~~Schools and child day care facilities with 50 or more students.~~
5. ~~Public buildings open for general use by the public.~~
6. ~~Public transportation facilities.~~
7. ~~River recreational use areas.~~

8. — Ski areas.

C. — All loading/unloading areas shall conform to the dimensions under Table 17.35.060.2:

Table 17.35.060.2

| Use Type | Width | Length | Vertical Clearance |
|--|--------|--------|--------------------|
| Commercial Office, Recreational, and Civic | 12 ft. | 25 ft. | 14 ft. |
| Other — Commercial and Industrial | 12 ft. | 40 ft. | 14 ft. |

D. — All loading and unloading areas shall be marked appropriately with curb painting and/or signs that prohibit parking.

17.35.070 — Recreational Vehicle Parking

A. — Recreational vehicle (RV) parking spaces shall be required as set forth in Table 17.35.040.1.

B. — In residential zones, RV parking or storage shall be limited to one such vehicle per lot. RV parking or storage shall not encroach into any required setback area and shall be screened from public view.

C. — Where RV parking and storage areas are provided in association with a mobile/manufactured home park, townhouse, apartment, or other multi-unit residential development, such parking shall be screened with fencing or landscaping.

17.35.080 — Parking Lot Design Standards

The following standards shall apply to all parking lots required under this Chapter.

A. — **Parking Lot Dimensions.** Parking lot dimensions shall conform to requirements under the El Dorado County Standard Plans Manual, Standard Plan RS-90.

B. — **Controlled Access.** Every parking and loading stall shall be accessible from the drive aisle without displacement of other vehicles.

C. — **Public Road Access.** Except for single-unit residential dwellings, as defined in Article 8, parking stalls shall be designed so as to prohibit the backing of vehicles directly into any public road right of way or easement in order to exit the site.

- ~~D. **Vertical Clearance.** Every parking stall and drive aisle shall have a minimum of eight feet vertical clearance.~~
- ~~E. **Snow Removal Storage.** Parking areas located at the 4,000 foot elevation or higher shall provide snow removal storage areas. Such storage areas shall be equivalent to 10 percent of the surface used for parking and access and shall not utilize any required parking spaces. Landscaping areas may be utilized for this purpose in compliance with Section 17.34.060 (Maintenance and Protection).~~
- ~~F. **Parking Area Gradient.** All parking areas shall be graded to provide adequate drainage of all surface areas into an on site drainage improvement or stormwater drainage system, in compliance with the gradient standards in the Land Development Manual (LDM).~~
- ~~G. **Landscaping Required.** Landscaping shall be required for all parking lots consistent with the requirements set forth in Chapter 17.33 (Landscaping Standards).~~

17.35.090 — Parking Lot Construction Standards

Based on parking lot turnover set forth in Table 17.35.040.1, all required parking and loading areas shall conform to the following surfacing requirements, as provided in the LDM, unless otherwise allowed under Article 4 for a specific use:

Table 17.35.090.1 — Parking and Loading Area Surfacing Requirements

| | PARKING LOT TURNOVER | | |
|------------------|-----------------------------|--------------------|--------------------|
| Location | High | Medium | Low |
| Community Region | Asphalt / Concrete | Asphalt / Concrete | Asphalt / Concrete |
| Rural Center | Asphalt / Concrete | Asphalt / Concrete | Chip Seal |
| Rural Region | Asphalt / Concrete | Chip Seal | Gravel |

- ~~A. Pervious surfacing material may be substituted for concrete or asphalt paving, such as pervious asphalt, unmortared brick, or other masonry paving units that serve to reduce stormwater runoff and increase groundwater recharge, subject to approval by the review authority.~~
- ~~B. **Striping.** Parking spaces in paved parking areas shall be clearly delineated with white or yellow painted striping, a minimum of four inches in width. Parking spaces in graveled lots may be identified by wheel stop barriers.~~
- ~~C. **Wheel Stops.**~~
 - ~~1. All parking spaces adjacent to sidewalks or landscaping, other than for single-unit residential dwellings, shall provide concrete wheel stops a minimum of three feet between the farthest edge of the wheel stop and the nearest edge of the sidewalk or landscaped area.~~

~~2. Wheel stops may be eliminated adjacent to landscape areas in compliance with Paragraph 17.33.050.C.3 (Landscape Standards).~~

~~3. Wheel stops shall be anchored securely to the asphalt.~~

~~**D. Directional Arrows and Signage.** Aisles, approach lanes, pedestrian crossings, and loading/unloading areas shall be clearly marked with directional lines, arrows and/or signs to facilitate traffic movement and ensure pedestrian safety.~~

~~**E. Maintenance.** All parking and loading areas, drive aisles, and access drives shall be maintained in good condition and kept free of outside storage and debris.~~

17.35.100 Non-conforming Parking

~~No additional parking spaces shall be required for those existing uses made noncompliant with parking standards on the effective date of this Chapter, subject to the following:~~

~~A. Whenever the existing use is enlarged, expanded, or intensified, additional parking spaces shall be provided only for the enlargement, expansion, or intensification subject to the standards in this Chapter.~~

~~B. Whenever the existing use is changed to a new use where the parking requirement becomes 50 percent higher, parking for the entire site shall be consistent with the requirements and standards of this Chapter.~~

CHAPTER 17.36 – SIGNS RESERVED

Sections:

~~17.36.010 Exception Official Public Signs~~

~~17.36.020 Exception Identification Sign~~

~~17.36.030 Exception Wall Signs~~

~~17.36.040 Face Used to Determine Area~~

~~17.36.050 Location~~

~~17.36.060 Resemblance to Traffic Signs Prohibited~~

~~17.36.070 Lighting~~

~~17.36.080 Moving Signs Prohibited~~

~~17.36.090 Three dimensional Signs~~

~~17.36.100 Number Permitted~~

~~17.36.110 Special Use in One District Nontransferable~~

~~17.36.120 Off-site Signs~~

~~17.36.130 Sign Matrix~~

17.36.010 Exception Official Public Signs

~~Sign provisions shall not apply to official public signs located within the public rights of way.~~

17.36.020 — Exception — Identification Sign

~~Sign area provisions shall not apply to signs expressing by letter, figures or symbols, direction or identification such as address, name, access or parking, and not exceeding four square feet each.~~

17.36.030 — Exception — Wall Signs

~~Sign area provisions shall not apply to signs using the wall or window of a building as the surface or attached to the wall of a building, providing the signs do not project more than twelve inches beyond the exterior face of the wall, providing the wall is a non projecting, integral part of the building and providing the aggregate area of the wall and/or window sign does not exceed twenty percent of the total area of the building face; and further provided that the signs shall advertise only such general product, or products, and/or service, or services, as is or are actually sold, dispensed or rendered on the premises.~~

17.36.040 — Face Used to Determine Area

~~Sign area provisions shall apply to the overall display surface of the single largest face of the sign and not to the aggregate of display faces.~~

17.36.050 — Location

~~Where permitted, subject to the sign matrix below (Table 17.36.050), signs may be located on the required yards or setbacks, providing they do not constitute a hazard to pedestrians or vehicular traffic, do not conceal from view any public sign or traffic signal and are not located on nor extend onto or project over public right_of_way without having first obtained a written revocable permit from the director of the Department of Transportation to do so. Signs must comply with zoning requirements and shall be allowed only where the county road right_of_way is one hundred feet or more in width and where the traveled way and shoulders do not cover the entire right_of_way. Fees for the permit shall be established, paid and expended as provided in Section 12.08.160. The Board may appoint one or more local committees to advise and make recommendations to the director of the Department of Transportation and the Board regarding the issuance of the permits. When any such committee has been appointed by the Board, the director of the Department of Transportation shall refer pertinent requests for the permits to the appropriate committee for recommendation prior to issuance of the permit.~~

17.36.060 — Resemblance to Traffic Signs Prohibited

~~Signs shall not resemble any official traffic or identification signs or signals, or use terms such as "stop" or "danger" in a manner which might create public confusion.~~

17.36.070 — Lighting

~~Lighted signs shall not be blinking and shall be controlled so that visibility of vehicular traffic is not impaired, and objectionable glare is shielded from adjoining residential zones in compliance with Table 17.36.130 (Sign Matrix).~~

17.36.080 — Moving Signs Prohibited

Moving signs or parts of signs shall not be allowed.

17.36.090 — Three-dimensional Signs

Three-dimensional signs shall be allowed, providing they are nonrepresentational.

17.36.100 — Number Permitted

It shall not be construed that, as a matter of right, the use of more than two signs shall be allowed subject to the exceptions contained in Section 17.36.010 and 17.36.020.

17.36.110 — Conditional Use Permit in One District Nontransferable

It shall not be construed that an allowable sign by Conditional Use Permit in one or more zone(s) shall be deemed allowable as a matter of right in any other zone(s) not expressly providing for the use.

17.36.120 — Off-Site Signs

- A. Off-site signs, not otherwise regulated by this Title, may be established by Conditional Use Permit subject to Section 17.51.020.
- B. Prior to the issuance of a Conditional Use Permit for off-site signs, the Zoning Administrator shall consider the location, size and display of the sign for compliance with the policies of the General Plan land use element.

17.36.130 — Sign Matrix

Industry association signs approved by the Board, such as for the Farm Bureau, Farm Trails, Apple Hill, Fairplay Winery Association, and El Dorado Winery Association, that do not exceed four square feet each, shall be exempt from the provisions of this matrix.

| SIGN MATRIX | | | | | |
|--------------------|--|---------------------------|---|---|--|
| Zones | Maximum Area (in sq ft) | Number | Maximum Height (in ft) | Illumination | Special Use Regulation/ Purpose / Conditions |
| CC, CR, CG, I, | 50 or 80 | 2 @ 50 sf or 1 @ 80 sf | 50 | Internal, external, or top-mounted in compliance with 17.34.050.A.2 ^{1,2} | ¹ Full cutoff in compliance with Chapter 17.34. Dark background when internally illuminated. ² 17.40.040.F |
| CPO, CL, CM | Office complex: 50 or 80 ³ | 2 @ 50 sf or 1 @ 80 sf | Wall height of building or complex, not to exceed 50 | Internal/external ¹ | ³ Freestanding and wall signs shall not cumulatively exceed maximum area. Signs shall not face adjoining residential zones. |

| SIGN MATRIX | | | | | | |
|--|---|---|---|---|---|--|
| Zones | Maximum Area (in sq ft) | Number | Maximum Height (in ft) | Illumination | Special Use Regulation / Purpose / Conditions | |
| | Individual offices: 3 if exterior, 1 if interior ⁴ | 1 per office | 6, wall or door mounted | None | ⁴ Signifying the name and/or specialty of the occupant. | |
| NS | 32 | 1 | 6 | External or top-mounted in compliance with 17.34.050.A.2 ¹ | | |
| R&D ⁵ | Freestanding: 50. Wall signs: 80, cumulative. | Freestanding: 1 Wall signs per building: 2 | Freestanding: 12 Wall sign: building wall height | Internal/external ¹ | ⁵ Standards subject to compliance with approved sign package for entire development, when applicable. | |
| LP | 16 | 2 | 12 | None | | |
| RFH | 50 or 80 | 2 @ 50 sf or 1 @ 80 sf | 35 | Internal/external/ top-mounted in compliance with 17.34.050.A.2 ¹ | — | |
| RL | 16 | 1 | 12 | None | | |
| RM, MP | 32 | 1 per road frontage | 6 | External: ground or top mounted ¹ | | |
| RM, R1, R20K | — | — | — | None | Home Occupations: Table 17.40.170 | |
| | 16 ^{5,2} ⁶ | 1 ⁵ , multiple ⁶ | 6 ^{5,2} ⁶ | External: ground or top mounted ¹ | Model Homes: ⁵ For model home subdivision ID sign. ⁶ For individual model home nameplates and for water efficient landscape ID sign. | |
| R1A, R2A, R3A, | — | — | — | None | Home Occupations: Table 17.40.170 | |
| RE, | — | — | — | None | | |
| PA, LA, AG, RL, FR, | 32 | 1 ⁷ | 6 | None | ⁷ Two, if part of a ranch marketing or winery operation. 17.40.090.C.4 (B&B Ord) 17.40.400.H.2.d (Winery Ord) Table 17.40.170 (Home Occupation Ord) | |
| RL, PA, LA, AG, FR, TPZ, OS | 2 ⁸ | Multiple ⁹ | 6 | None | ⁸ Warning signs against hunting, trespassing, or shooting, only. ⁹ Not to be located closer than 660 ft from a similar sign | |
| MR | 32 | 1 | 12 | None | Accessory to mining operation. | |

CHAPTER 17.37 – NOISE STANDARDS

Sections:

- 17.37.010– ~~Purpose and Intent~~Content
- 17.37.020– Exemptions
- 17.37.030– Applicability
- 17.37.040– Definitions
- 17.37.050– Acoustic Analysis Requirements
- 17.37.060– Noise Standards
- 17.37.070– Noise Reduction Measures
- 17.37.080– Noise Level Measurements

17.37.010– ~~Purpose and Intent~~Content

~~The purpose of t~~This Chapter complies with General Plan Goal 6.5 (Acceptable Noise Levels), is to support and supplements County Code Chapter 9.16 (Noise) by establishing standards concerning acceptable noise levels for both noise-sensitive land uses and for noise-generating land uses. ~~maximum noise levels and standards to protect the public health, safety, and welfare. The intent is to provide standards for use in evaluating potential noise impacts to protect persons from excessive noise levels that can interfere with sleep, communication, relaxation, and full enjoyment of one's property; can contribute to physiological stress and hearing impairment; and can adversely affect the value of real property.~~

17.37.020– Exemptions

The following noise sources shall be exempt from the standards of this Chapter:

- A.- Activities conducted in public parks, public playgrounds, and public or private school grounds, including but not limited to school athletic and school entertainment events, providing an amplified sound system is not required or used.
- B.- The use of any mechanical device, apparatus, or equipment related to or connected with emergency activities or emergency work to protect life or property.
- C.- Safety signals, warning devices, and emergency pressure relief valves properly operated and in good working order.
- D.- Noise sources associated with property maintenance, such as lawn mowers, trimmers, snow blowers, and power tools in good working order, provided that the activities take place between the hours of eight a.m. and nine p.m. on weekdays and nine a.m. to nine p.m. on weekends and federal holidays.

- E.- Noise sources associated with agricultural uses listed in Section 17.21.020 (Agricultural Zones: Matrix of ~~Permitted~~Allowed Uses) that are performed consistent with the standards and practices of the agricultural industry.
- F.- Noise sources associated with work performed by public or private utilities in the maintenance or modification of its facilities.
- G. ~~Bells, chimes, carillons, and similar devices being used for religious purposes or in conjunction with religious services, or for organized public celebrations of public holidays or other publicly celebrated occasions~~ Noise sources associated with religious gatherings, public holidays, or other commonly celebrated occasions.
- H.- Traffic on public roadways, railroad line operations, aircraft in flight, and any other activity where regulation thereof has been preempted by state or federal law.
- I. Construction (e.g., construction, alteration or repair activities) during daylight hours provided that all construction equipment shall be fitted with factory installed muffling devices and maintained in good working order.
- J. Normal collection of household garbage, yard waste and recyclables.
- K. Cutting of firewood for non-commercial personal use.

17.37.030 Applicability

Subject to the exemptions in Section 17.37.020 above, noise standards established in this Chapter shall apply to all noise generating uses requiring discretionary review or ministerial permits, with the exception of existing and new single-unit residential dwellings on legal lots ~~of record~~ that are not within areas governed by an Airport Comprehensive Land Use Plan. (General Plan Policy 6.5.1.4)

17.37.040 Definitions

The following definitions shall apply to this Chapter:

“Acoustic Specialist” means a person trained in acoustic sampling that is qualified to measure sound levels consistent with criteria contained within this article.

“Ambient Sound Level” means the composite of normal or existing sound from all sources, measured at a given location for a specified time of the day or night.

“A-weighting” means the scale for measuring sound that de-emphasizes low and high frequencies in order to simulate human hearing; indicated as dBA.

“Community Noise Equivalent Level (CNEL)” means a weighted average hourly noise level over a 24 hour day used specifically for airport and aircraft noise assessment.

“**Day-Night Average Sound Level (Ldn)**” means the dBA for a given area during a 24-hour day with a 10dB weighting applied to nighttime sound levels.

“**Decibel**” means a unit of relative loudness on a logarithmic scale that runs from zero for the least perceptible sound to 140 for sound that causes pain.

“**Equivalent Noise Level (Leq)**” means the average energy noise level determined by averaging the cumulative noise event levels during a specific period of time and expressing it in A-weighted decibels, or dBA.

“**Fixed Sound Source**” means a device or machine which creates sounds while fixed or stationary, including but not limited to residential, agricultural, industrial, and commercial machinery and equipment, pumps, fans, compressors, air conditioners and refrigeration equipment, and motor vehicles operated on private property.

“**Maximum Sound Level (Lmax)**” means the maximum instantaneous noise level measured on a sound level meter.

“Non-Transportation Noise Source” means industrial operations, commercial land uses, outdoor recreation activities and facilities, HVAC units, schools, hospitals, and other outdoor land use.

“**Sensitive Receptor**” means a land use in which there is a reasonable degree of sensitivity to noise. Such uses include single- and multi-unit residential dwellings including frequently inhabited outbuildings, schools, hospitals, churches, rest homes, cemeteries, public libraries, and other sensitive uses as determined by the Director.

“**Sound Level Meter**” means an instrument meeting American National Standard Institute (ANSI) Standard S1.4A-1985 for Type 1 or Type 2 sound level meters, or an instrument and associated recording and analyzing equipment that will provide equivalent data.

“Transportation Noise Source” means traffic on public or private (non-county maintained) roadways, railroad line operations, and aircraft in flight.

17.37.050 Acoustic Analysis Requirements

An acoustic analysis prepared by an acoustic specialist shall be required prior to discretionary authorization or permit approval for the following uses:

- A. New noise-generating land uses likely to exceed the performance thresholds in the Tables in Section 17.37.060 (Noise Standards) when sources being proposed in areas adjacent to sensitive receptors. Noise sources may include industrial operations, outdoor recreation facilities, outdoor concerts and events utilizing amplified sound systems, commercial land uses, fixed sound sources, and other similar uses; or

- B. ~~New Noise-sensitive~~ land uses being proposed in areas exposed to existing or projected exterior noise levels likely to exceed the thresholds in the Tables in Section 17.37.060.

17.37.060- Noise Standards

The following standards shall apply to all development projects for which an acoustic analysis is required:

- A. Noise sensitive land uses affected by ~~Non-~~transportation noise sources shall **be subject to not exceed the noise** standards set forth in Table 17.37.060.1, below:

Table 17.37.060.1

| NOISE LEVEL PERFORMANCE PROTECTION STANDARDS FOR NOISE SENSITIVE LAND USES AFFECTED BY NON-TRANSPORTATION SOURCES | | | | | | |
|--|------------------------------------|---------------|-------------------------------------|---------------|-----------------------------------|---------------|
| Noise Level Descriptor | Daytime 7 a.m. - 7 p.m. | | Evening 7 p.m. - 10 p.m. | | Night 10 p.m. - 7 a.m. | |
| | Community / Rural Centers | Rural Regions | Community / Rural Centers | Rural Regions | Community / Rural Centers | Rural Regions |
| Hourly Leq, dBA | 55 | 50 | 50 | 45 | 45 | 40 |
| Maximum level, dBA | 70 | 60 | 60 | 55 | 55 | 50 |

1. Each of the noise levels specified above shall be lowered by **five-5** dBA for simple tone noises, noises consisting primarily of unamplified speech or music, or for recurring impulsive noises. These noise level standards do not apply to residential units established in conjunction with industrial or commercial uses, such as caretaker dwellings.
2. The Director can impose noise level standards which are up to 5 dBA less than those specified above, based upon a determination of existing low ambient noise levels in the vicinity of the project site.
3. The exterior noise level standard shall be applied as follows:
 - a. In Community Regions, at the property line of the receiving property;
 - b. In Rural Centers and Regions, at a point 100 feet away from a sensitive receptor or, if the sensitive receptor is within the Platted Lands Overlay (-PL) ~~Combining Zone~~ where the underlying land use designation is consistent with Community Region densities, at the property line of the receiving property or 100 feet away from the sensitive receptor, whichever is less; or

c. In all areas, at the boundary of a recorded noise easement between affected properties.

B. Transportation noise shall not exceed ~~be subject to the~~ thresholds set forth in Table 17.37.060.2, below:

Table 17.37.060.2

| MAXIMUM ALLOWABLE NOISE LEVEL STANDARDS - EXPOSURE FOR NOISE-SENSITIVE LAND USES AFFECTED BY TRANSPORTATION NOISE SOURCES | | | |
|--|-------------------------------|------------------------|----------------------|
| Sensitive Receptor | Outdoor Activity Areas | Interior Spaces | |
| | Ldn/CNEL, dB | Ldn/CNEL, dB | Leq, dB ¹ |
| Residential | 60 | 45 | — |
| Transient Lodging | 60 | 45 | — |
| Hospitals, Nursing Homes | 60 | 45 | — |
| Theaters, Auditoriums, Music Halls | — | — | 35 |
| Churches, Meeting Halls, Schools | 60 | — | 40 |
| Office Buildings | — | — | 45 |
| Libraries, Museums | — | — | 45 |
| Playgrounds, Neighborhood Parks | 70 | — | — |
| Notes | | | |
| ¹ As determined for a typical worst-case hour during periods of use. | | | |

- a. In Community Regions and Rural Centers:
 - (1) Where the location of outdoor activity areas is not clearly defined, the exterior noise level standard shall be applied at the property line of the sensitive receptor.
 - (2) For residential uses with front yards facing the identified noise source, an exterior noise level threshold of 65 dBA Ldn shall be applied at the dwelling facade in addition to the required threshold at the outdoor activity area.

- b. In Rural Regions: An exterior noise level threshold of 60 dBA Ldn shall be applied at a 100 foot radius from the dwelling on lots five acres and larger. Those lots less than five acres shall have the noise level standards applied at the property line.

- c. Where it is not possible to reduce noise levels in those outdoor activity areas limited to 60 dBA Ldn/CNEL thresholds using a practical application of the best-available noise reduction measures, an exterior noise threshold of up to 65 dBA Ldn/CNEL may be allowed provided that available exterior noise level reduction measures have been implemented and interior noise levels are in compliance with this table.

- C. Construction-related noise shall ~~be~~ allow for exceptions to the evening and night time standards or other temporary exceedances of noise standards as may be approved by the Director, where necessary to alleviate traffic congestion and safety hazards, or where authorized by an approved permit.

~~subject to the noise thresholds set forth in Table 17.37.060.3 below:~~

Table 17.37.060.3

| Maximum Allowable Noise Exposure from Construction Noise | | | | |
|---|---|--------------------|-------------------------|--------------|
| Land Use Designation | Zones | Time Period | Noise Level, dBA | |
| | | | Leq | L-max |
| Multifamily, High Density Residential | RM, R1, R20K, R1A | 7 am – 7 pm | 55 | 75 |
| | | 7 pm – 10 pm | 50 | 65 |
| | | 10 pm – 7 am | 40 | 55 |
| Medium Density and Low Density Residential | R2A, R3A, RE 5; RE 10 (in Rural Centers) | 7 am – 7 pm | Same as above. | |
| | | 7 pm – 10 pm | Same as above. | |
| | | 10 pm – 7 am | 45 | 60 |
| Rural Residential, Agricultural Lands, Natural Resource, Tourist Recreational | PA, LA, AG, TPZ, FR, RL; RE 10 (in Rural Regions) | 7 am – 7 pm | 65 | 75 |
| | | 7 pm – 7 am | 60 | 70 |
| Commercial, Research & Development, Tourist Recreational, Public Facilities | C, CG, R&D, RFH | 7 am – 7 pm | 70 | 90 |
| | | 7 pm – 7 am | 65 | 75 |
| | CPO, NS, RFL | 7 am – 7 pm | 65 | 75 |
| | | 7 pm – 7 am | 60 | 70 |
| Industrial | I | Any time | 80 | 90 |
| | I-PL | | 70 | 80 |
| Open Space (Community Regions, Rural Centers) | OS | 7 am – 7 pm | 55 | 75 |
| | | 7 pm – 7 am | 50 | 65 |
| Open Space (Rural Regions) | OS | 7 am – 7 pm | 65 | 75 |
| | | 7 pm – 7 am | 60 | 70 |

1. Exceptions to the evening and night time standards in Table 17.37.060.3 as may be approved by the Director of Transportation if it can be demonstrated that construction at night is necessary to alleviate traffic congestion and safety hazards. (General Plan Policy 6.5.1.11)

17.37.070- Noise Reduction Measures

Noise reduction measures shall be incorporated into the project design to reduce noise levels at or below the thresholds set forth in Tables in Section 17.37.060.1, 2 and 3. Where applicable, the following specific requirements shall also apply:

- A.- For residential development along U.S. Highway 50, setbacks ~~shall~~ are the preferred approach-be required to meet noise threshold standards under Table 17.37.060.2, where feasible. Landscaped berms or screened sounds walls may be considered as alternatives. Sound walls in the foreground of Highway 50 are discouraged.
- B. For outdoor concerts and events utilizing amplified sound system(s), a discretionary permit shall be required in the form of a Temporary or Conditional Use Permit. Self-monitoring shall be performed to insure that sound system levels are in compliance with those specified in the conditions of approval based on the acoustic analysis. As a standard condition of approval for such use permits, failure to comply with sound system levels shall result in termination of the event for the duration of the period approved under the use permit and a moratorium on future events for the applicant or the property owner of two calendar years from the date of non-compliance. A second violation after such time shall result in revocation of the Conditional Use Permit, if applicable, and a permanent moratorium on future events for the applicant and property owner whether on that site or any other within the county.

17.37.080 Noise Level Measurements

For the purpose of evaluating conformance with the standards of this Chapter, noise levels shall be measured as follows:

- A.- **Use of Meter.** Any noise measurement shall be made with a sound level meter using the A-weighted scale. Calibration of the measurement equipment utilizing an acoustical calibrator shall be performed immediately prior to recording any noise data.
- B. **Ambient SoundNoise Levels.** Compliance with the above standards shall be determined by measuring the existing noise level with a sound level meter using slow response, with the sound source at issue remaining silent. The ambient sound level shall be determined based on the mean average of not less than three 20 minute measurements for any given time period. Additional noise measurements may be necessary to ensure that the ambient ~~noisesound~~ level is adequately determined.
- C.- **Measuring Exterior Noise Levels.** Except as otherwise provided in this Chapter, exterior noise levels shall be measured at the property line of the affected noise-sensitive land use. Where practical, the microphone shall be positioned five feet above the ground and away from reflective surfaces.
- D.- **Measuring Interior Noise Levels.** Interior noise levels shall be measured within the sensitive receptor, as defined in Section 17.37.040, at points at least four feet from the wall, ceiling, or floor nearest the noise source, with windows in the normal seasonal configuration. The reported interior noise level shall be determined by taking the arithmetic average of the readings taken at the various microphone locations.

CHAPTER 17.38 – OAK WOODLAND CONSERVATION

Removed at this time